



Customer information packet

248-183TD

1.5HP, 3600RPM, 3PH, 60HZ, 3535M, 3535M, TENV

Specifications

Frequency	60.00 Hz
Number of Poles	2
Phase	3
Product Style	PIVOT BELT SANDER
Speed	3600 rpm
Voltage	208 V
	230 V
	460 V

Part detail

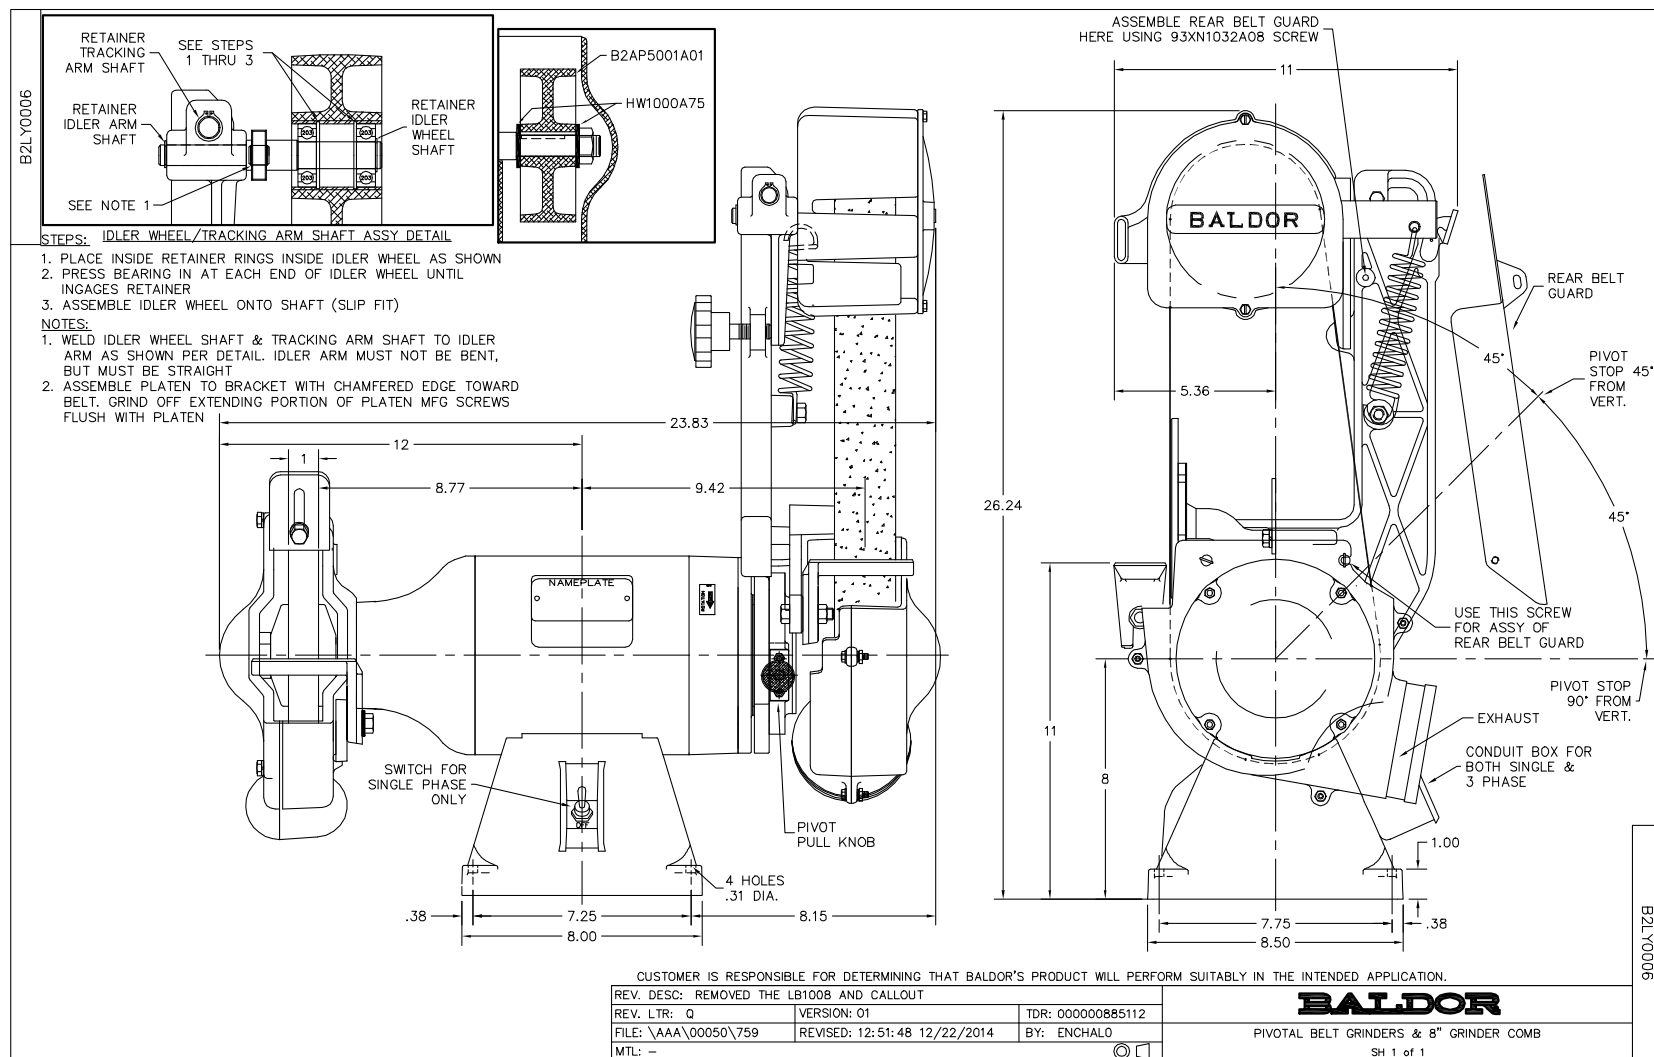
Revision	AX
Type	AC
Mech. spec.	B2-6
Base	
Status	PRD/A
Elec. spec.	G8WG0318
Layout	B2LY0006
Eff. date	12-15-2021
CD Diagram	CD0005
Poles	02
Leads	9#18 12" LG Y
Proprietary	False
Created date	01-01-0001

Nameplate

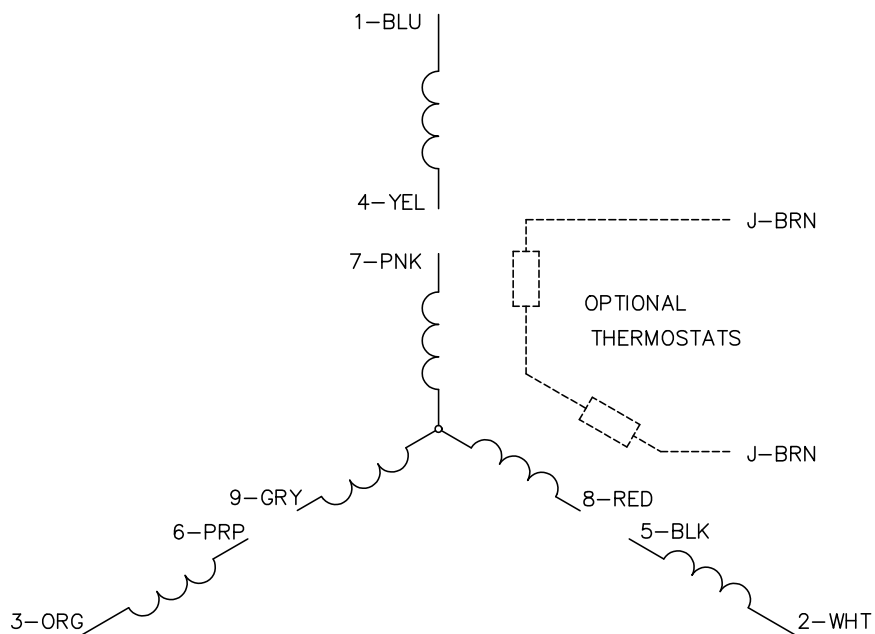

NP3118			
CAT.NO.	248-183TD		
HP	1.5	VOLTS	208-230/460
PHASE	3	AMPS	4.2-4/2
HZ	60	RPM	3600
SER.NO			
SPEC.	B2-6C		

Accessories


Part number	Description	Multiplier
GA16	PEDESTAL INDUSTRIAL, CAST IRON 6" - 10"	A8
GA14	PEDESTAL FABRICATED STEEL W/SHELVES	A8
GA20	PEDESTAL INDUSTRIAL, CAST IRON 8"-14"	A8
GA20E	PEDESTAL LIGHT INDUSTRIAL,STEEL	A8
AB248	2' X 48' 80 GRIT GRINDER BELT	A8



CD0005

LOW VOLTAGE
(2Y)

LINE

HIGH VOLTAGE
(1Y)

LINE

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS

REV. LTR: E

BY: JLP

REVISED: 01/19/99 10:15

TDR: 0171435

S00000

FILE: AAA00005140

MDL: -

MTL: -

BALDOR ELECTRIC Co.

3PH, DV, 9 LEADS

CD0005