Baker College | 115 YEARS OF IMPACT

Screw Threads and Thread Gauges

Baker College Engineering

Brad Peirson
College of Information Technology and Engineering


Agenda

Thread Standards

Thread Types

Thread Forms

Simple Machines

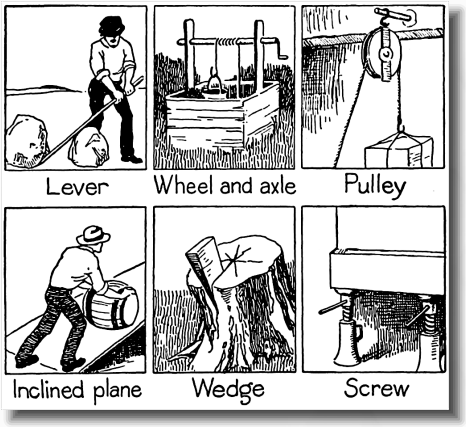

Attribution: Foster, Ellsworth D., ed; Hughes, James L. (James Laughlin), Public domain, via Wikimedia Commons

The screw is one of six *simple machines*–the basic machines on which all other machines are based.

The Archimedes Screw


- One of the oldest and simplest machines
- Dates back to at least Archimedes (~220 B.C.) who used it to pump water
- Some historians believe the Egyptians were using it earlier



Attribution: Cavaliere grande, CC BY-SA 4.0, via Wikimedia Commons

Further Development

- Screw press used for squeezing grapes and olives
- DaVinci used screws in many inventions–invented the buttress thread

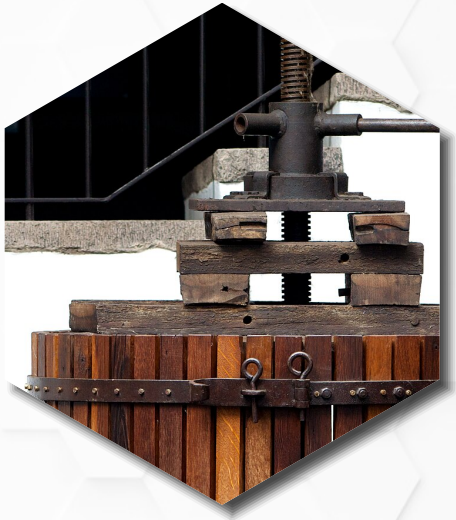

Attribution: Alexander Baxevanis, CC BY 2.0, via Wikimedia Commons, cropped from original

Thread Standards

The Wild West of Screw Threads



Attribution: The Portable Antiquities Scheme, CC BY 2.0, via Wikimedia Commons

For a *very* long time craftsmen would use whatever thread shape suited them–as on these post medieval hooks.

The Whitworth Thread



Attribution: Cccefalon, CC BY-SA 3.0, via Wikimedia Commons

In 1841 Sir Joseph Whitworth created the first standard *thread form*.

Standardization of Screw Threads (1 of 2)



Attribution: Christoph Roser at AllAboutLean.com, CC BY-SA 4.0, via Wikimedia Commons

Today, the metric world is on the ISO thread standard.

Standardization of Screw Threads (2 of 2)



Attribution: Christoph Roser at AllAboutLean.com, CC BY-SA 4.0, via Wikimedia Commons

The U.S. standardized on American Standard threads for a long time. That standard was eventually supplemented by the Unified Standard thread. In 1949, American Standard was officially obsoleted and was wholly replaced by Unified Standard.

The Various Thread Standards




Attribution: Christoph Roser at AllAboutLean.com, CC BY-SA 4.0, via Wikimedia Commons

Left to right: M12, 40mm LH – M12, 40 mm – M12x1.5, 40mm – M12x1.25, 40mm – UNF 1/2-20x1.5 – UNC 1/2-13x1.5 – BSW 1/2-12x1.5 – BSF 1/2-16x1.5

Thread Types


Types of Threads (1 of 2)

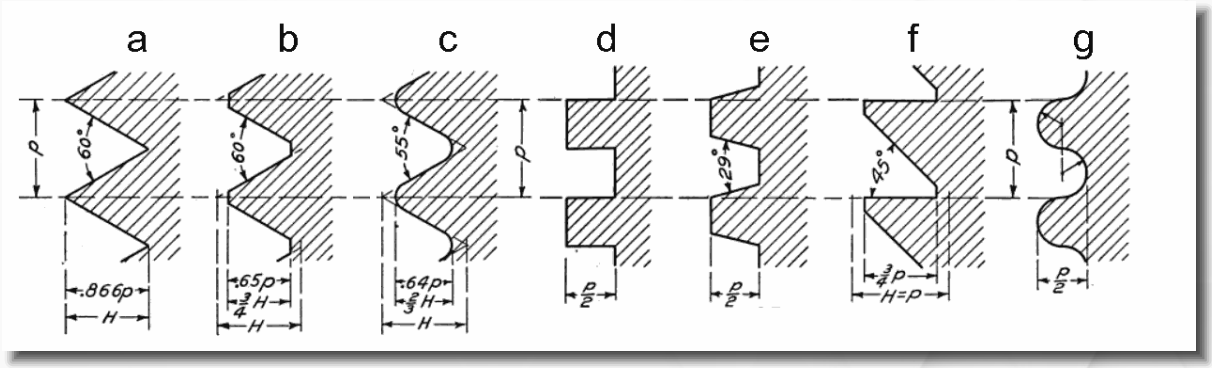

Attribution: Carl Lars Svenson, Public domain, via Wikimedia Commons

Left to right: V-thread – American National Thread – Whitworth – Square – Acme – Buttress – Knuckle

Types of Threads (2 of 2)

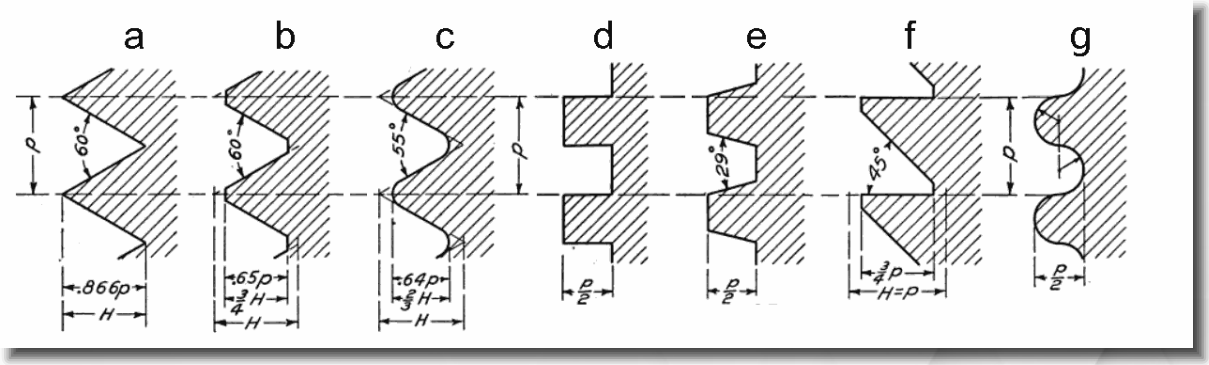


Attribution: Carl Lars Svenson, Public domain, via Wikimedia Commons

Threads all serve the same basic purpose: as they rotate they (or what they're attached to) moves linearly. While they all serve that same purpose, not all types of threads are good at, or even capable of, the same jobs.


V Threads

- Early attempt at a standardized form
- Basic 60°“V” shape

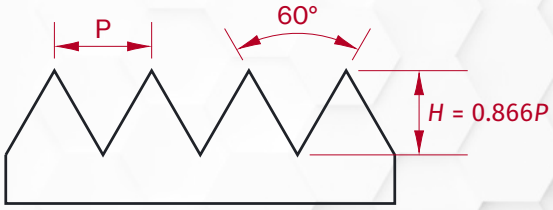


American National

- Standard US thread before Unified
- Same basic standard as V thread and Unified Standard
- General fastening

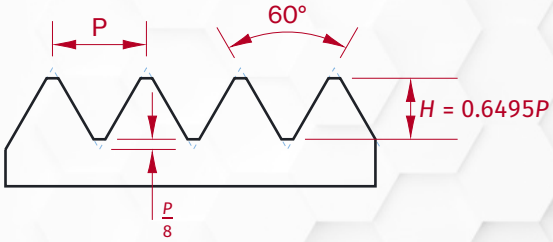


Acme Thread

- Thicker threads than most other designs
- Used strictly for linear motion

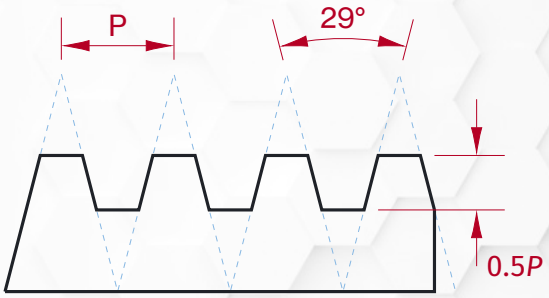

British Standard Pipe Thread


- Sides are not parallel – taper inward
- Gap between male and female gets smaller when tightened
- Designed to seal air/water

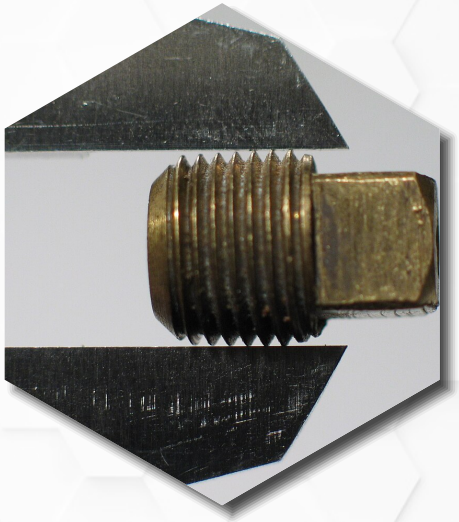

Attribution: BenFrantzDale at English Wikipedia, CC BY-SA 3.0 , via Wikimedia Commons

Thread Forms


Thread Forms (1 of 3)

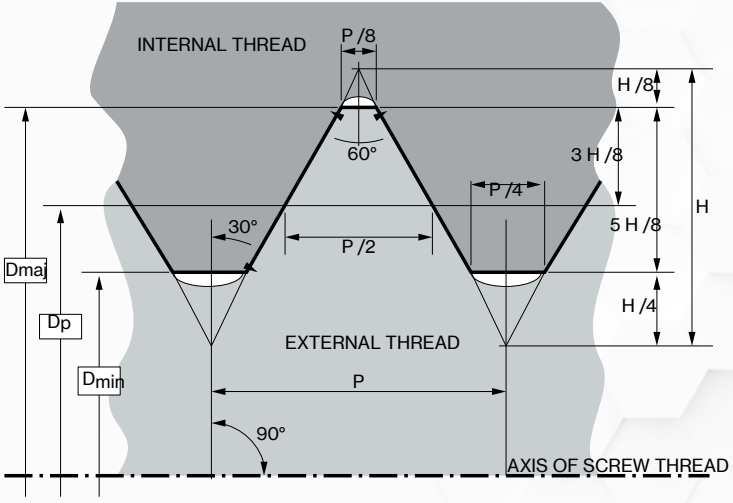

Attribution: Inductiveload, Public domain, via Wikimedia Commons, converted to TikZ format

Thread Forms (2 of 3)


- A *thread form* is a technical drawing defining the shape of the threads
- Thread forms in modern standards are generic–dimensions are formulas

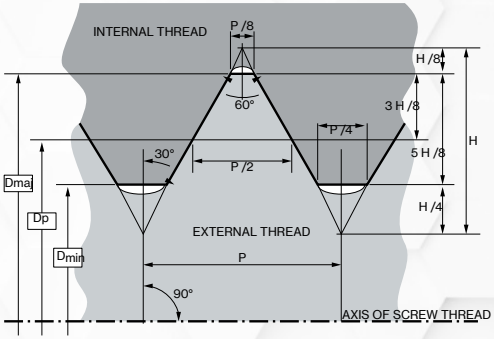

Attribution: Inductiveload, Public domain, via Wikimedia Commons, converted to TikZ format

Thread Forms (3 of 3)

- Basic dimensions based on **standard sizes**
- Other dimensions use the standard sizes in their forumlas

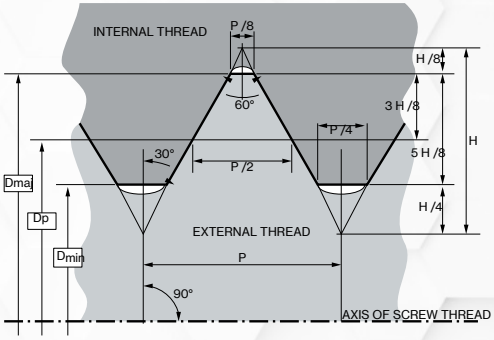


Attribution: Inductiveload, Public domain, via Wikimedia Commons, converted to TikZ format

Thread Forms

Thread Definitions


Thread Definitions

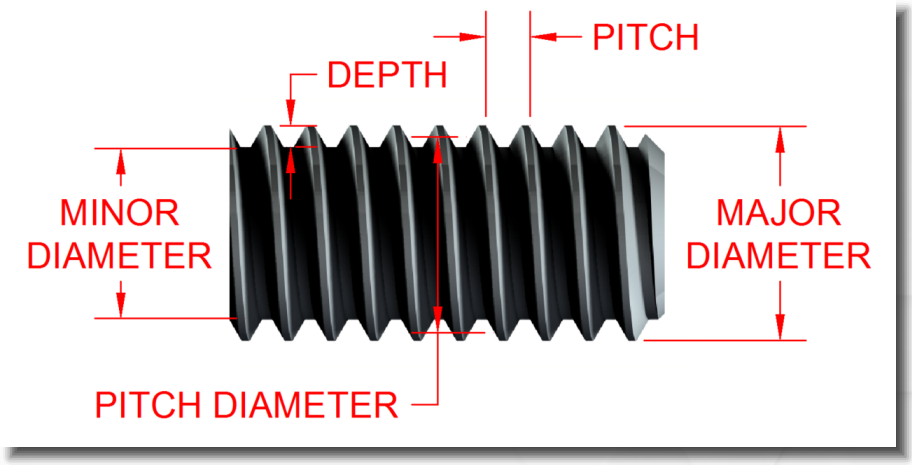

Attribution: Robert Hewitt, CC BY-SA 3.0, via Wikimedia Commons

Screw Thread


A ridge of uniform section in the form of a helix on the external or internal surface of a cylinder, or in the form of a conical spiral on the external or internal surface of a cone.

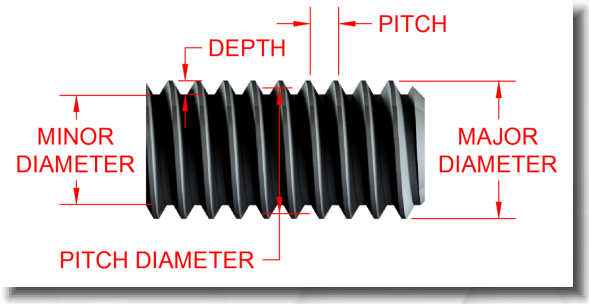

Attribution: Robert Hewitt, CC BY-SA 3.0, via Wikimedia Commons

Internal Thread


Thread on the inside of a member (nut)

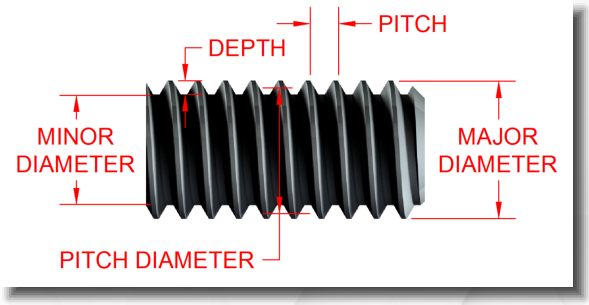

Attribution: Robert Hewitt, CC BY-SA 3.0, via Wikimedia Commons

External Thread

Thread on the outside of a member (screw)

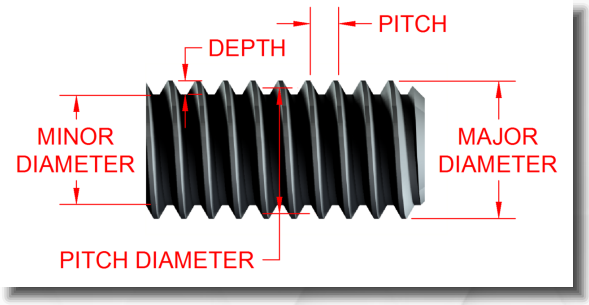

Attribution: Robert Hewitt, CC BY-SA 3.0, via Wikimedia Commons

Male and Female

- We really shouldn't use male and female to describe internal and external threads
- And not just out of fear of getting cancelled...
- Depending on the standard, the "male" may have internal threads

Luer Lock



Attribution: ZaldyImg, CC BY 2.0, via Wikimedia Commons

The *male* luer lock connector, common in syringes, uses *internal* threads. Because the threads don't do the sealing, the male taper inside the fitting does.


Thread Forms

Thread Dimensions

Thread Diameter

Major Diameter The largest diameter of the thread (screw *or* nut)


Minor Diameter The smallest diameter of the thread (screw *or* nut)

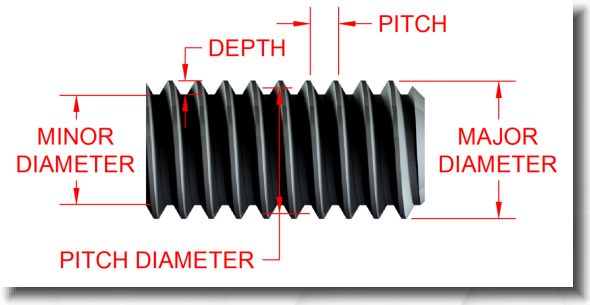

Attribution: Robert Hewitt, CC BY-SA 3.0, via Wikimedia Commons

Pitch Diameter

On a straight screw thread, the diameter of an imaginary cylinder, the width of which would pass through the threads at such points as to make equal the width of the threads and the width of the spaces cut by the surface of the cylinder

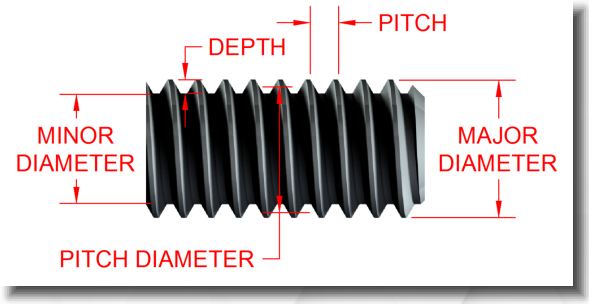


Attribution: Robert Hewitt, CC BY-SA 3.0, via Wikimedia Commons

Pitch


The distance from a point on the screw thread to a corresponding point on the next screw thread

$$\text{Pitch} = \frac{1}{\text{Threads/unit}}$$

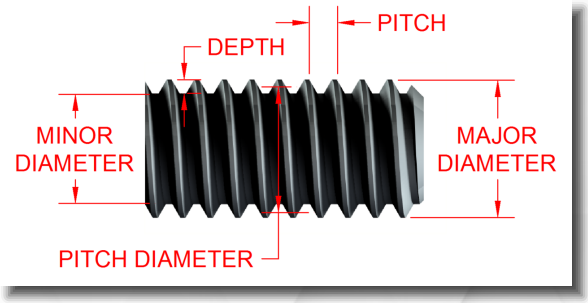

Attribution: Robert Hewitt, CC BY-SA 3.0, via Wikimedia Commons

Pitch of Different Thread Types

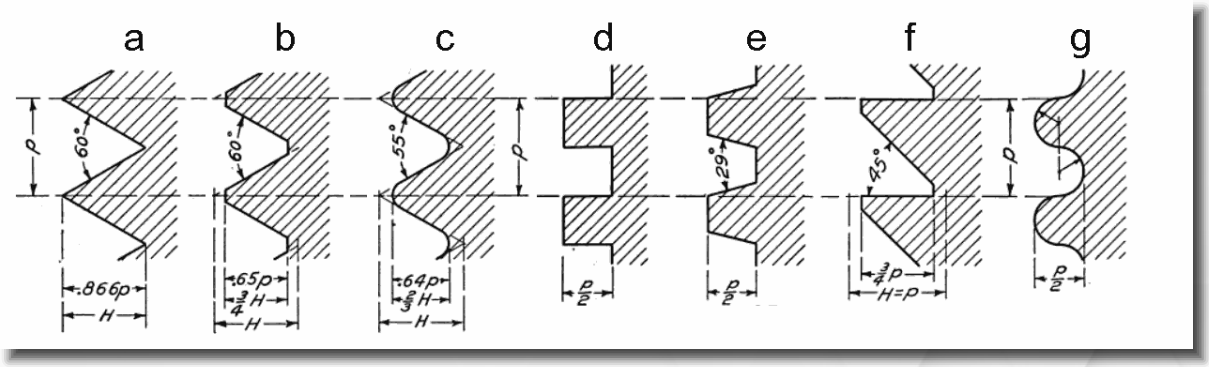


Attribution: Carl Lars Svenson, Public domain, via Wikimedia Commons

While the *thread form* varies depending on the type of thread, the definition of *pitch* does not. This diagram shows the pitch of the 7 different thread forms shown.

Lead

The distance a screw thread advances axially in one turn

- Single start:
  Lead = Pitch
- Double start:
  Lead = 2 × Pitch
- Triple start:
  Lead = 3 × Pitch

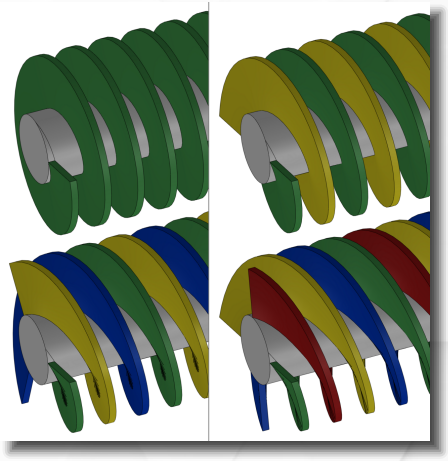

Attribution: Jahobr, CC0, via Wikimedia Commons

Screw Lead Video

Multiple Start Threads - SolidWorks 2017


https://www.youtube.com/watch?v=73hLRT7n6H0

Video ©M5D / Cimquest via YouTube.com

Thread Angle

Angle of Thread The angle included between the sides of the thread measured in an axial plane

Half Angle of Thread The angle included between a side of the thread and the normal to the axis, measured in an axial plane

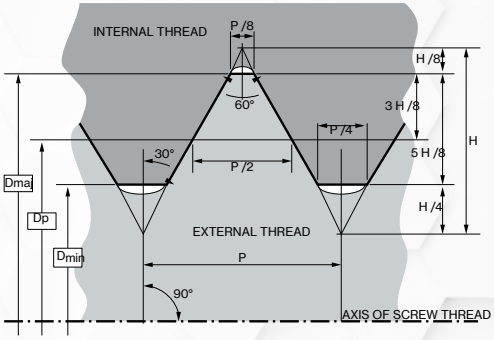

Attribution: Inductiveload, Public domain, via Wikimedia Commons, converted to TikZ format

Unified Thread Form Tolerances

Nominal Size	External								Internal					
	Class	Allowance	Major Diameter			Pitch Diameter		UNR Minor	Class	Minor Diameter		Pitch Diameter		Major Diameter
			Max	Min	Min	Max	Min			Min	Max	Min	Max	Min
1/2-13 UNC	1A	0.0015	0.4985	0.4822	–	0.4485	0.4411	0.4069	1B	0.417	0.434	0.4500	0.4597	0.5000
	2A	0.0015	0.4985	0.4876	0.4822	0.4485	0.4435	0.4069	2B	0.417	0.434	0.4500	0.4565	0.5000
	3A	0.0000	0.5000	0.4891	–	0.4500	0.4463	0.4084	3B	0.4170	0.4284	0.4500	0.4548	0.5000
1/2-20 UNF	1A	0.0013	0.4987	0.4865	–	0.4662	0.4598	0.4392	1B	0.446	0.457	0.4675	0.4759	0.5000
	2A	0.0013	0.4987	0.4906	–	0.4662	0.4619	0.4392	2B	0.446	0.457	0.4675	0.4731	0.5000
	3A	0.0000	0.5000	0.4919	–	0.4675	0.4643	0.4405	3B	0.4460	0.4537	0.4675	0.4717	0.5625

Thread Forms

Creating Threads

Questions?

Copyright Notice

Screw Threads and Thread Gauges©2026 by Brad Peirson is licensed under Creative Commons Attribution-NonCommercial-ShareAlike 4.0 International (CC BY-NC-SA 4.0). To view a copy of the official license, visit https://creativecommons.org/licenses/by-nc-sa/4.0/.

Exceptions and Exclusions

Baker College Branding & Trademarks: All Baker College logos, trademarks, wordmarks, seals, slide design templates, and proprietary branding elements contained in these materials are **EXCLUDED** from the CC BY-NC-SA 4.0 license. All rights are reserved by Baker College. Express written permission from Baker College is required for any use, copying, or redistribution of these elements.

Third-Party Media & Content: Any third-party images, graphics, diagrams, or external media incorporated in these materials are included under their respective original licenses or permissions and are individually attributed at their point of use.

Original Author Content: All unattributed figures, diagrams, text, code snippets, and media are original works created by the author and are licensed under the CC BY-NC-SA 4.0 license.