

- AllnGaP LED technology
- Hundreds of pre-programmed messages, MUTCD messages, and operator-created messages
- Environmentally friendly
- Cost effective
- Reliable and easy to operate
- Optional hydraulic lift and remote programming
- Replace characters without the need of tools
- 4 LED's per pixel



Display

Sign size 38" x 75", 20 x 40 pixels Fonts 7" H 10/line (3) lines 11.5" H 6/line (2) lines 28" H 3/line (1) line 10" H 8/line (2) lines

Sign size 50" x 88", 28 x 48 pixels

Fonts 7" H 10/line (3) lines

10" H 9/line (3) lines

11.5" H 9/line (3) line

24" H 3/line (1) line

Window 1/8" clear polycarbonate

Sign case One piece, aluminum, powder coat black

LED's Amber, 590nm, 4 per pixel

Characters Replaceable without need for tools

Control

Type Proprietary embedded,

fully NTCIP compliant

Dimming Manual or automatic
Remote Comm Cellular capable

Messages 50 user programmable

(6 pages each), 200 pre-programmed including MUTCD symbols and arrows

Message scheduling 36 events

Interface Color touch tablet with

built in graphic and text

libraries

Trailer Construction

Width across fenders 75"

Drawbar 3" x 3" x .375" wall steel

tube / removable

Fenders formed steel replaceable

Frame 2" x 3" x 1/8" wall tubing

Length w/ drawbar 106" Length w/o drawbar 88" Height sign up 138" Height sign down 99"

Hitch 2" ball class II 3500 lb capacity

Jacks (4) slide, (1) swing type Tire size ST205/75-D15 load C

Weight 1250 lbs

Lift mechanism 1,000 lb with double disc brake.


1/4" diameter steel rope cable rated 4,400 lb. Elecro-hydraulic optional

Batteries and Solar Collectors

Batteries 12v deep cycle
Battery charger 15A fanned cooled
Battery enclosure Lockable, ventilated, steel
Solar collector Crystalline silicon, 120w

Options

- Combo hitch 2" ball & 3" pintle ring
- Speed detection
- Wheel locks
- Cellular phone for remote operation
- •Hidden shackle locbrackets to secure batteries
- •Electro hydraulic lift

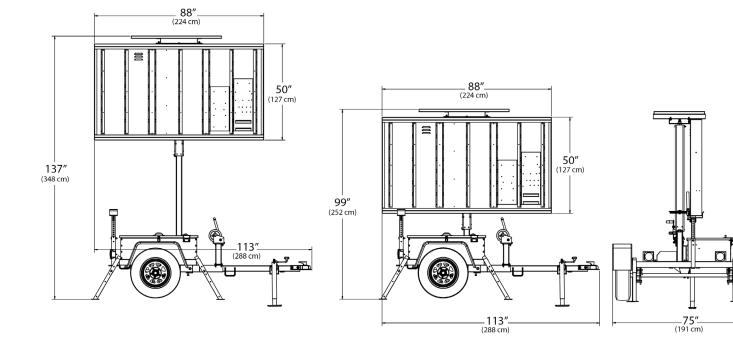

Specifications subject to change any time without notice. Copyright 2017 National Signal, Inc. All rights reserved. Printed in the United States.

