

TN-15FW550

15" LF LOUDSPEAKER

1800W RMS capacity
140mm(5.5 in) inside-outside PI VC
45-1500Hz response
97dB sensitivity
8Ω nominal impedance



ELECTRO ACOUSTIC SPECIFICATIONS

Nominal Chassis Diameter	15/385 in/mm
MAX Power	3000 Watts
RMS Power	1800 Watts
Impedance	8 Ohm
Resonance(natural) Frequency	45 Hz
Frequency Response	45-1500 Hz
Sensitivity(1W/1m)	97 dB
Voice Coil Diameter	5.5/140 in/mm
Winding material	PI(inside-outside)
Magnet	309 Oz 280X150X20mm(2PCS)

MOUNTING/SHIPPING INFORMATION


Overall Diameter	15.4/392	in/mm
Bolt Circle Diameter	14.8/377	in/mm
Baffle cutout Diameter	14/356	in/mm
Depth	8.5/215	in/mm

Net Weight	24.8 kgs
Shipping Weight	25.5 kgs
Shipping Box	42X42X25 cm


THIELE SMALL PARAMETERS

FS Hz	45 Hz
Vas	30 dm ³
RE Ohms	6.2 ohm
Qms	17.1
Qes	0.27
Qts	0.26
BL T·m	50.5 T·m
MMS	349.5
Xmax(mm)	9.6 mm
Sd	855 cm ²
Efficiency %	1.33 %
EBP	166

FREQUENCY RESPONSE DATA

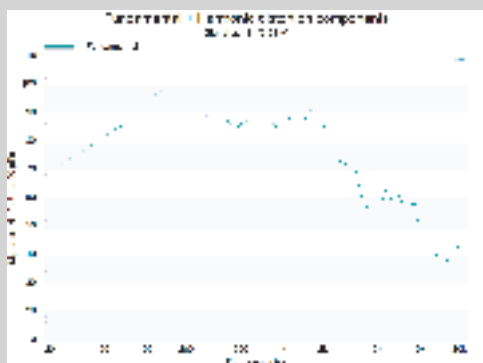

IMPEDANCE DATA

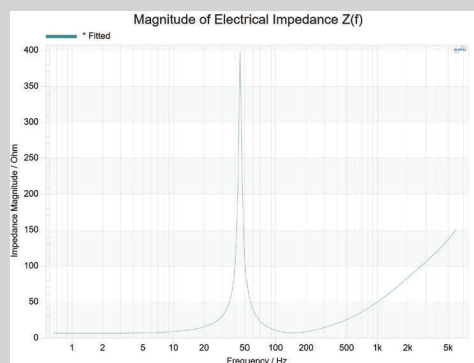

THE LF LOUDSPEAKER | TN-15FW550



©Copyright ZTZ. • All rights reserved
www.ztzaudio.com