

TN-15LF451

15" LF LOUDSPEAKER

1200W RMS capacity
114mm(4.5 in) inside-outside PI VC
45-1200Hz response
97 dB sensitivity
8Ω nominal impedance



ELECTRO ACOUSTIC SPECIFICATIONS

Nominal Chassis Diameter	15/385 in/mm
MAX Power	2400 Watts
RMS Power	1200 Watts
Impedance	8 Ohm
Resonance(natural) Frequency	45 Hz
Frequency Response	45-1200 Hz
Sensitivity(1W/1m)	97 dB
Voice Coil Diameter	4.5"/114mm
Windling material	PI(inside-outside)
Magnet	201Oz 254X127X30mm

MOUNTING/SHIPPING INFORMATION


Overall Diameter	15.5/393 in/mm
Bolt Circle Diameter	14/357 in/mm
Baffle cutout Diameter	13.9/353 in/mm
Depth	7.9/200 in/mm

Net Weight	18 kgs
Shipping Weight	19 kgs
Shipping Box	40.5X40.5X23cm


THIELE SMALL PARAMETERS

FS Hz	45 Hz
Vas	45 dm ³
RE Ohms	5.2 ohm
Qms	15.7
Qes	0.4
Qts	0.39
BL T/m	31 T/m
MMS(gms)	250 grams
Xmax(mm)	15 mm
Sd	829 cm
Efficiency %	2.5 %
EBP	112

FREQUENCY RESPONSE DATA

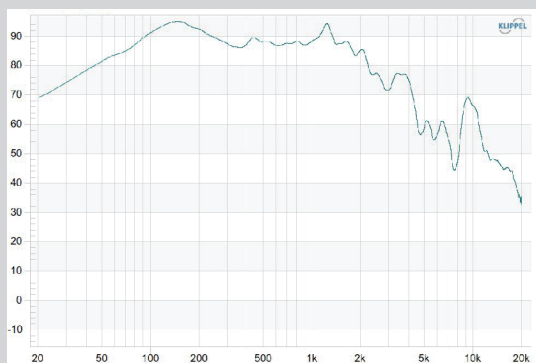

IMPEDANCE DATA

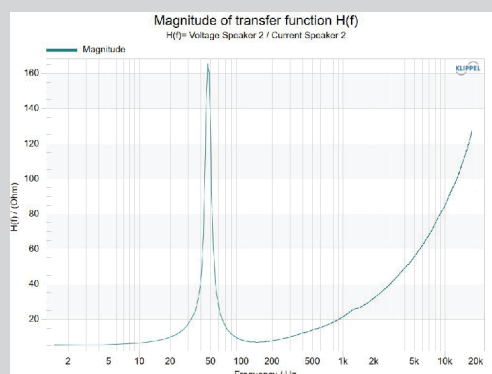

THE LF LOUDSPEAKER | TN-15LF451