

TN-18FW400

18" LF LOUDSPEAKER

1000W RMS capacity
100mm(4 in) inside-outside PI VC
33-1200Hz response
97dB sensitivity
8Ω nominal impedance



ELECTRO ACOUSTIC SPECIFICATIONS

Nominal Chassis Diameter	18/460 in/mm
MAX Power	2000 Watts
RMS Power	1000 Watts
Impedance	8 Ohm
Resonance(natural) Frequency	33 Hz
Frequency Response	33-1200 Hz
Sensitivity(1W/1m)	97 dB
Voice Coil Diameter	4/100 in/mm
Winding material	PI(inside-outside)
Magnet	125 Oz 220X110X25 mm

MOUNTING/SHIPPING INFORMATION

Overall Diameter	18.2/462 in/mm
Bolt Circle Diameter	17.5/445 in/mm
Baffle cutout Diameter	16.6/422 in/mm
Depth	8.5/216 in/mm

Net Weight	13.5/29.76 kgs
Shipping Weight	14.5/31.97 kgs
Shipping Box	50X50X25 cm 18.69X18.69X9.84 in


THIELE SMALL PARAMETERS

FS Hz	33 Hz
Vas	205 dm ³
RE Ohms	4.8 ohm
Qms	13.8
Qes	0.35
Qts	0.34
BL T·m	26.3 T·m
MMS	231
Xmax(mm)	9 mm
Sd	1225 cm ²
Efficiency %	2.18 %
EBP	94

FREQUENCY RESPONSE DATA



IMPEDANCE DATA

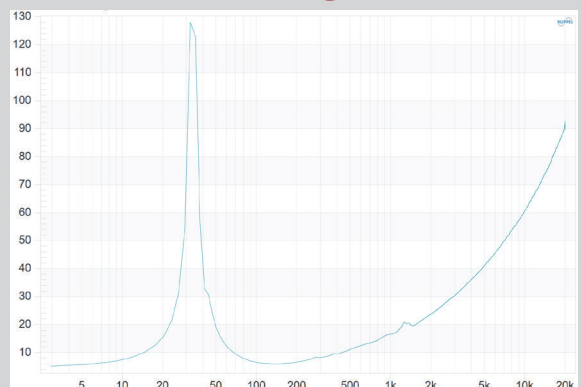

THE LF LOUDSPEAKER | TN-18FW400