

TN-18SW1280

18" LF LOUDSPEAKER

1800W RMS capacity

127mm(5 in) inside-outside PI VC

32-2000Hz response

98 dB sensitivity

8Ω nominal impedance



ELECTRO ACOUSTIC SPECIFICATIONS

Nominal Chassis Diameter	18/460 in/mm
MAX Power	3600 Watts
RMS Power	1800 Watts
Impedance	8 Ohm
Resonance(natural) Frequency	32 Hz
Frequency Response	32-2000 Hz
Sensitivity(1W/1m)	98 dB
Voice Coil Diameter	5"/127mm
Windling material	PI(inside-outside)
Magnet	203 Oz 280*140*25mm

MOUNTING/SHIPPING INFORMATION


Overall Diameter	18.2/462 in/mm
Bolt Circle Diameter	17.3/440 in/mm
Baffle cutout Diameter	16.9/430 in/mm
Depth	8.2/208 in/mm

Net Weight	20.8 kgs
Shipping Weight	21.8 kgs
Shipping Box	49.5X49.5X25cm


THIELE SMALL PARAMETERS

FS Hz	32 Hz
Vas	152 dm ³
RE Ohms	5.6 ohm
Qms	9.6
Qes	0.27
Qts	0.26
BL T/m	30 T/m
MMS(grms)	245 grams
Xmax(mm)	11.2 mm
Sd	1225 cm ²
Efficiency %	2.5 %
EBP	118

FREQUENCY RESPONSE DATA

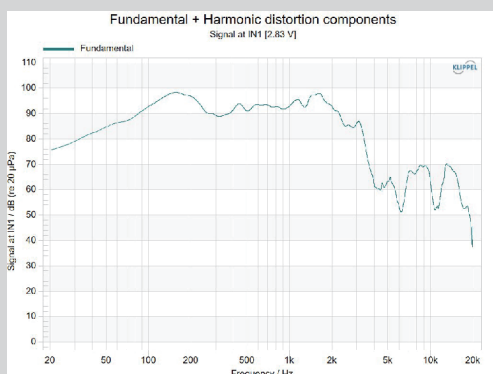

IMPEDANCE DATA

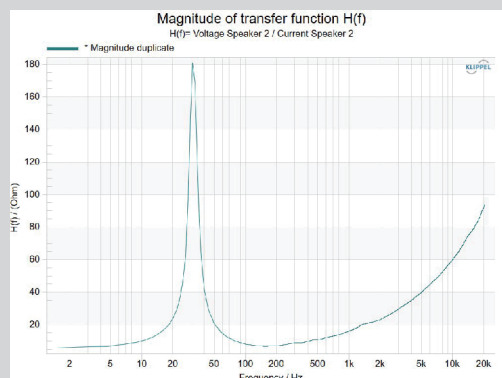

THE LF LOUDSPEAKER | TN-18SW1280