


SPANNING TREE PROTOCOL

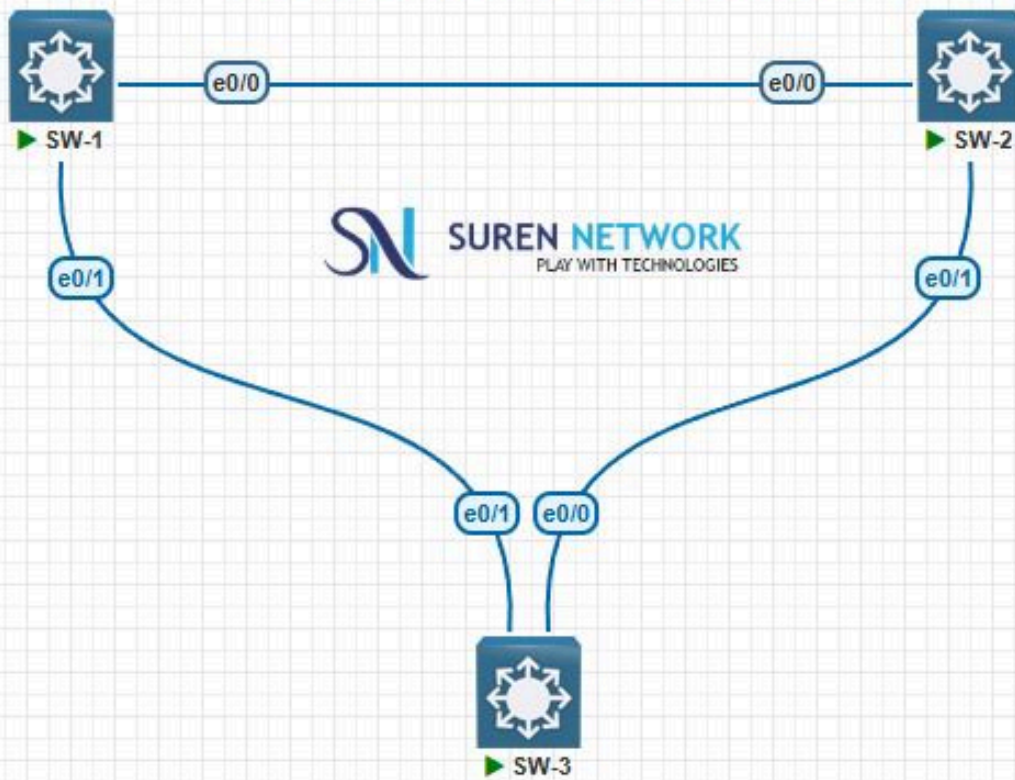

```
SW-1
2, changed state to down
*Aug 17 16:01:04.182: %LINEPROTO-5-UPDOWN: Line protocol on Interface Ethernet0/
3, changed state to down
SW-1#sh spanning-tree

VLAN0001
  Spanning tree enabled protocol ieee
  Root ID    Priority    32769
             Address     aabb.cc00.0100
             This bridge is the root
             Hello Time  2 sec  Max Age 20 sec  Forward Delay 15 sec

  Bridge ID  Priority    32769 (priority 32768 sys-id-ext 1)
             Address     aabb.cc00.0100
             Hello Time  2 sec  Max Age 20 sec  Forward Delay 15 sec
             Aging Time  15 sec

Interface                Role Sts Cost      Prio.Nbr Type
-----
Et0/0                    Desg FWD 100      128.1    P2p
Et0/1                    Desg FWD 100      128.2    P2p

SW-1#
```

```
SW-2#
SW-2#
SW-2#sh spanning-tree

VLAN0001
  Spanning tree enabled protocol ieee
  Root ID    Priority    32769
             Address     aabb.cc00.0100
             Cost        100
             Port        1 (Ethernet0/0)
             Hello Time   2 sec  Max Age 20 sec  Forward Delay 15 sec

  Bridge ID  Priority    32769  (priority 32768 sys-id-ext 1)
             Address     aabb.cc00.0200
             Hello Time   2 sec  Max Age 20 sec  Forward Delay 15 sec
             Aging Time   15 sec

Interface                Role Sts Cost      Prio.Nbr Type
-----
Et0/0                    Root FWD 100      128.1    P2p
Et0/1                    Desg FWD 100      128.2    P2p
```

SW-3#

SW-3#

SW-3#sh spanning-tree

VLAN0001

Spanning tree enabled protocol ieee

Root ID Priority 32769
 Address aabb.cc00.0100
 Cost 100
 Port 2 (Ethernet0/1)
 Hello Time 2 sec Max Age 20 sec Forward Delay 15 sec

Bridge ID Priority 32769 (priority 32768 sys-id-ext 1)
 Address aabb.cc00.0300
 Hello Time 2 sec Max Age 20 sec Forward Delay 15 sec
 Aging Time 15 sec

Interface	Role	Sts	Cost	Prio.Nbr	Type
Et0/0	Altn	BLK	100	128.1	P2p
Et0/1	Root	FWD	100	128.2	P2p