

Sheetname: CPU

CPU MC68000
CLOCK 16MHZ
DATA AND ADDRESS BUFFERS
HALT AND RESET
DTACK GLUE LOGIC
INTERRUPT

Sheetname: MEMORY

ROM 16kBytes
RAM 1MBytes

Sheetname: FOUR UARTS

TG16C554
4 UARTS.

Arquivo: fourUarts.kicad_sch


Sheetname: cpuNoBuffer


CPU MC68000
CLOCK 16MHZ
HALT AND RESET
DTACK GLUE LOGIC
INTERRUPT

Arquivo: cpuNoBuffer.kicad_sch

UART CONTROL

Arquivo: uart_control.kicad_sch

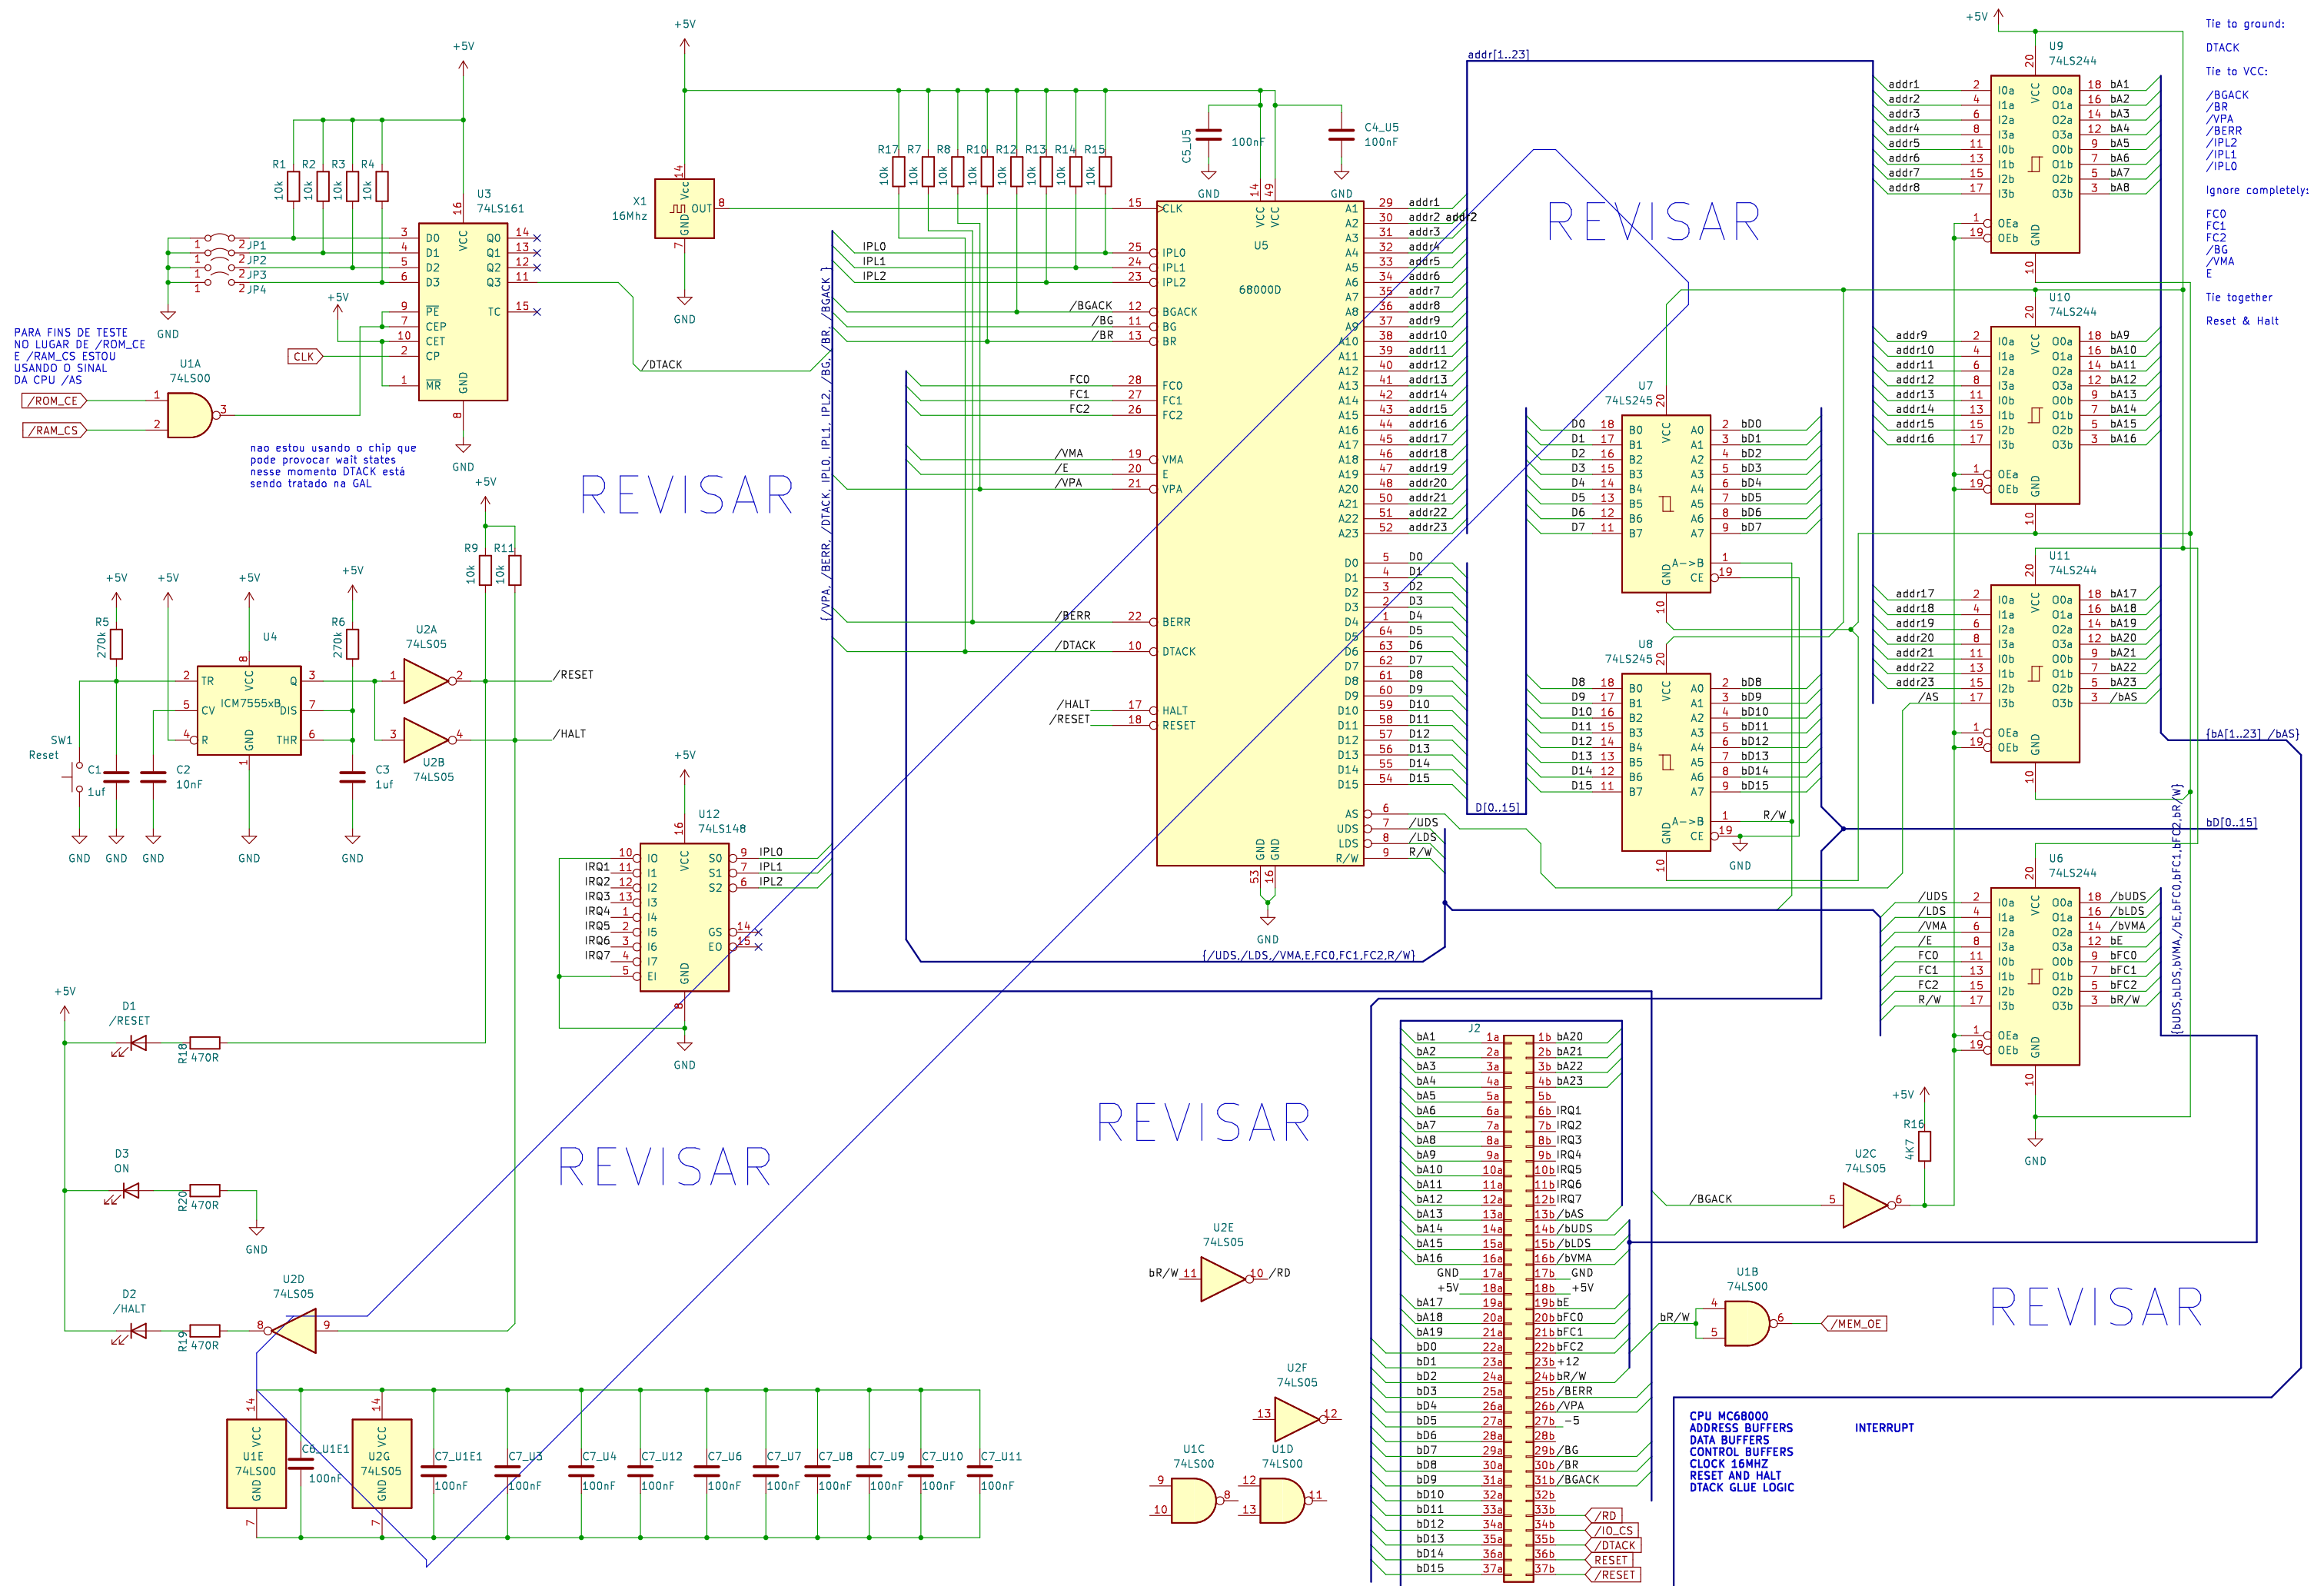

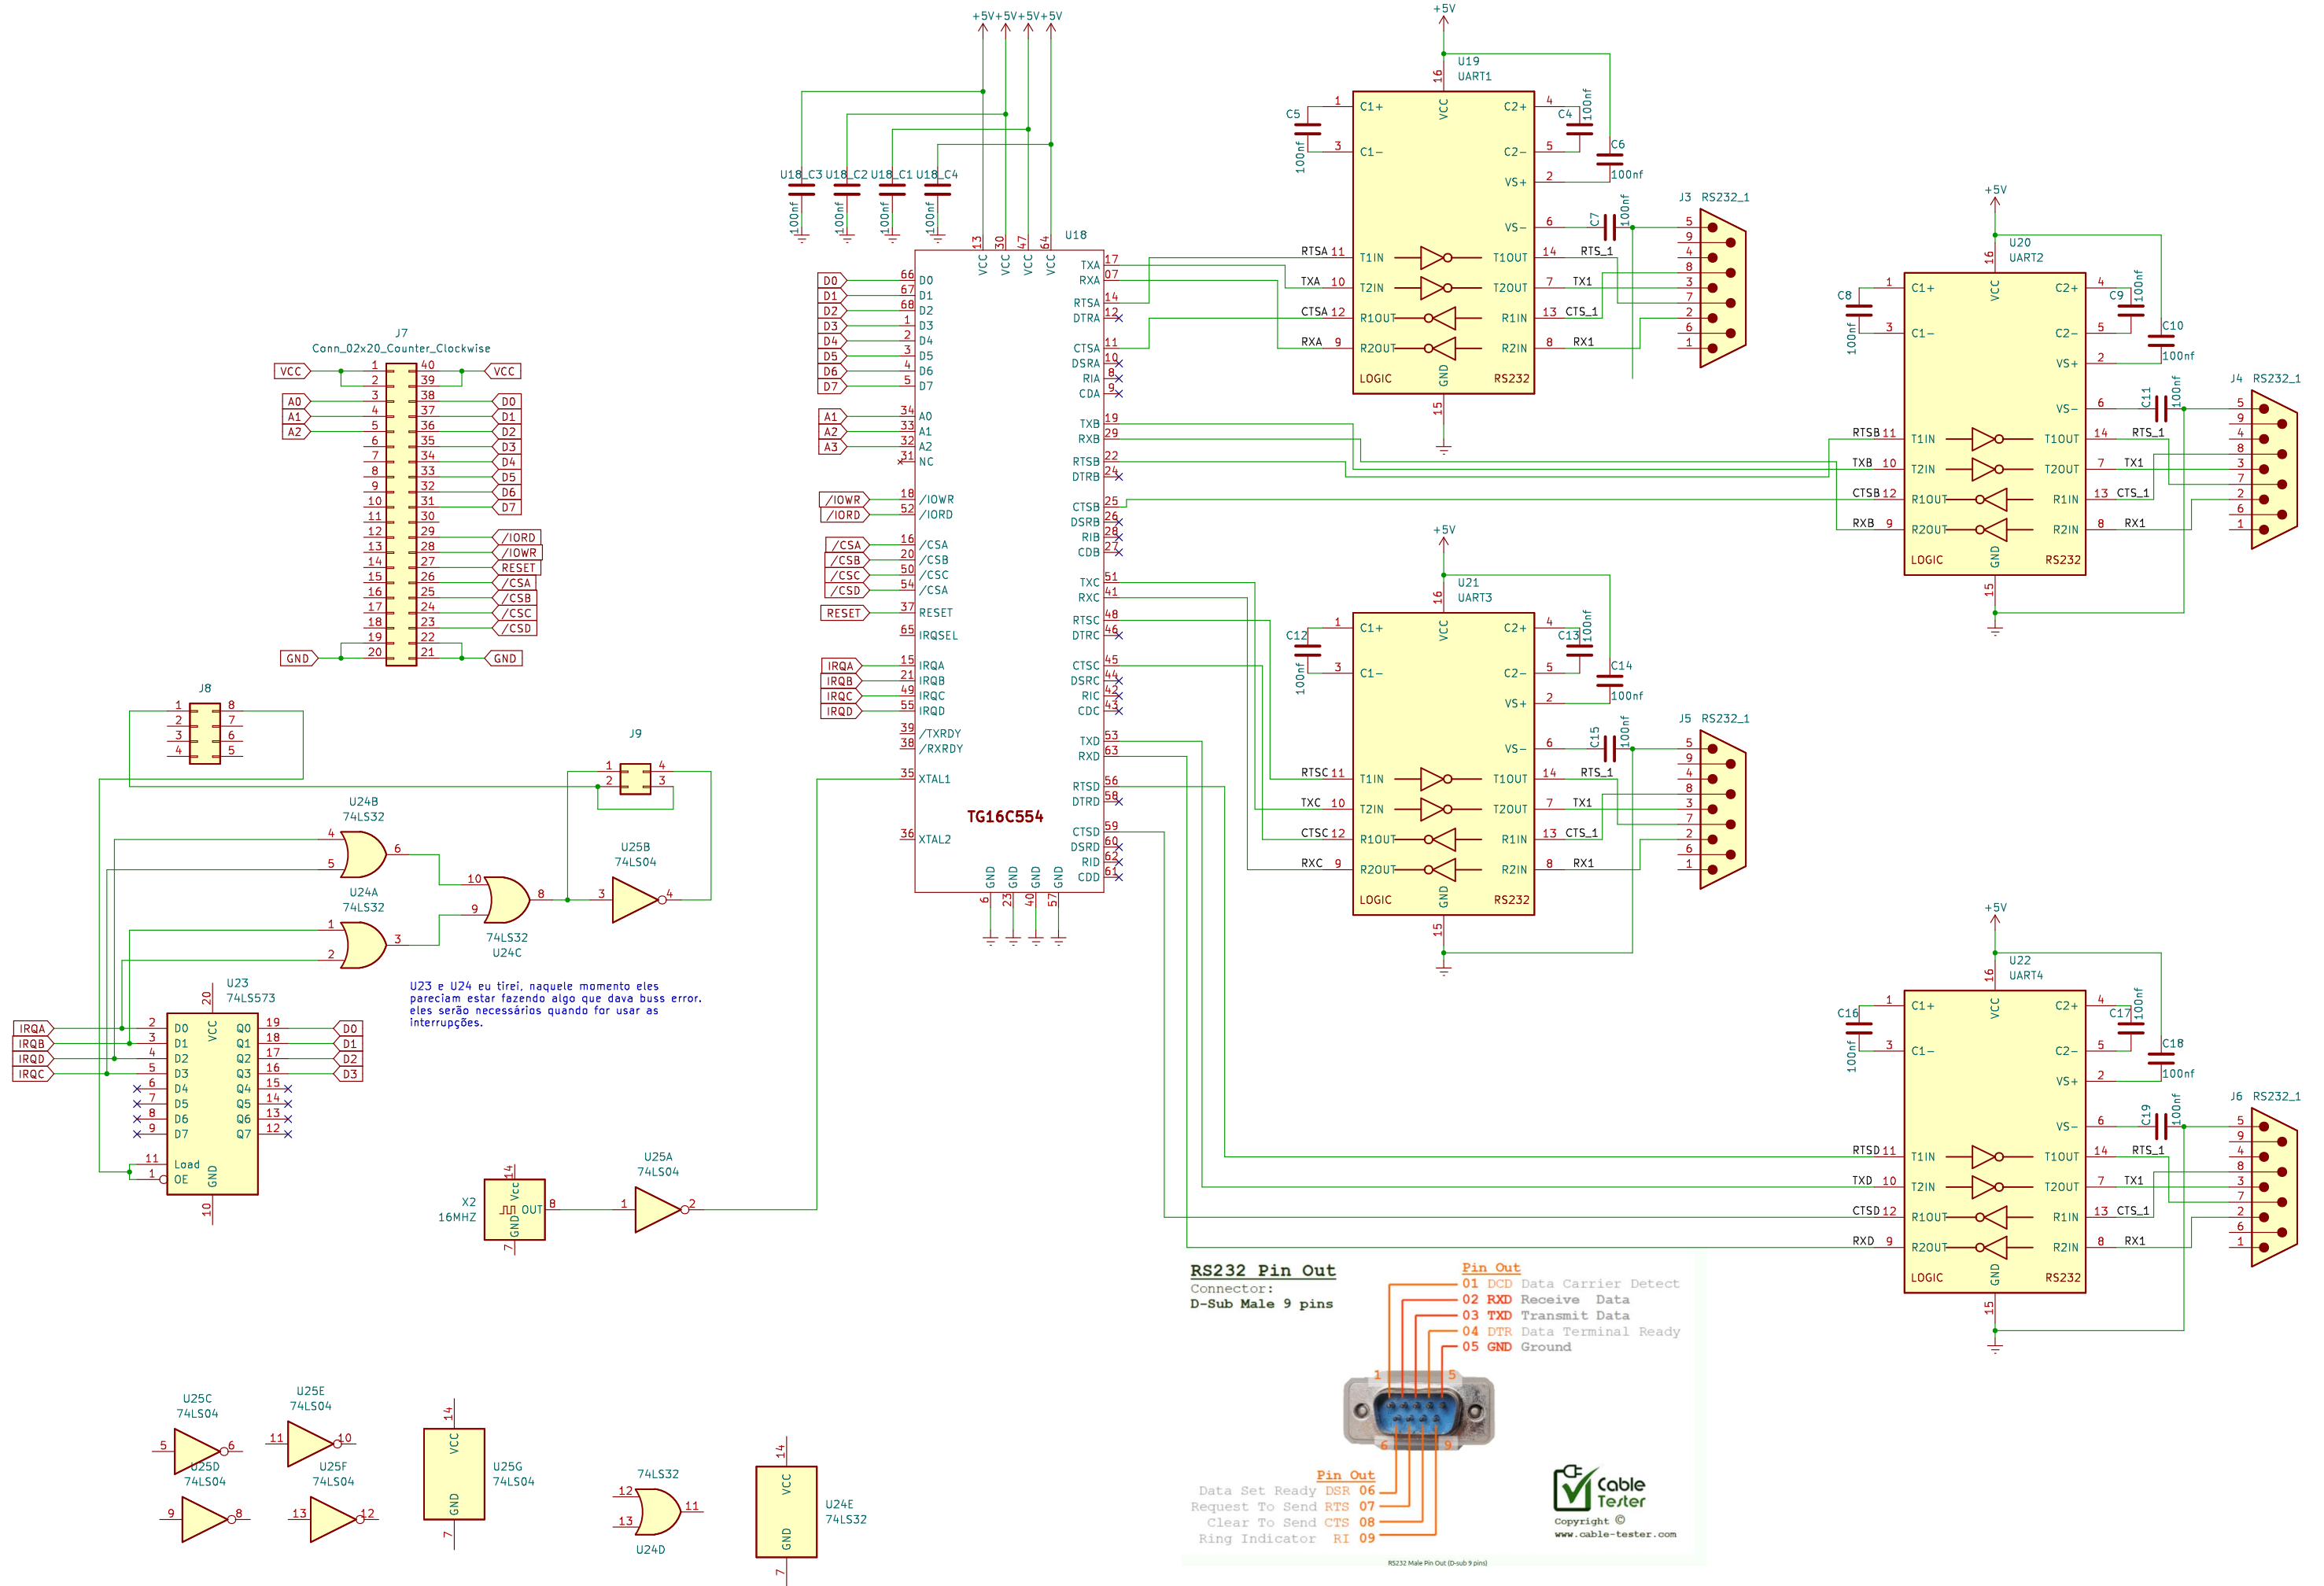



UART1 - 0x4000 até 0x20FF = UART_CS1
UART2 - 0x4100 até 0x21FF = UART_CS2
UART3 - 0x4200 até 0x22FF = UART_CS3
UART4 - 0x4300 até 0x23FF = UART_CS4
key - 0x4400 até 0x44ff = key_cs na leitura
Led - 0x4400 até 0x44ff = LED_CS na escrita

