
RS PRO Aluminium/Steel Dome Head Blind Rivet, 4.8 mm Diameter x 15 mm long

Supplier Part Number: OJCLASDM4815HG

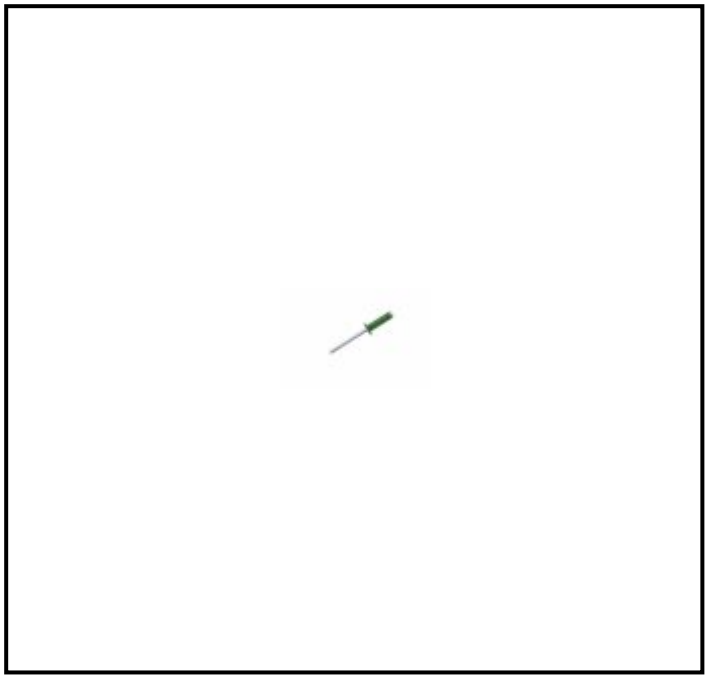

FEATURES

- **Aluminium Rivet Body:** Provides corrosion resistance and lightweight strength.
- **Steel Mandrel:** Ensures a strong and secure fastening.
- **Dome Head Type:** Offers a neat and smooth finish.
- **Trivalent Chromate Finish:** Enhances corrosion resistance and longevity.
- **4.8 mm Rivet Diameter:** Suitable for a range of applications.
- **15 mm Rivet Length:** Accommodates materials with varying thicknesses.
- **5 mm to 10 mm Grip Range:** Versatile for different material thicknesses.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO Aluminium Blind Rivet is designed for secure fastening in a variety of materials where access is limited to one side. Ideal for applications requiring a strong and reliable joint, this rivet offers ease of installation and excellent durability.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	4.9 mm
Mandrel Material	Steel
Maximum Grip	10 mm
Minimum Grip	5 mm


Mechanical Specifications

Head Diameter	9.5 mm
Rivet Body Material	Aluminium
Rivet Diameter	4.8 mm
Rivet Length	15 mm
Shear Strength	1500 N
Tensile Strength	2350 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Additional Image 1

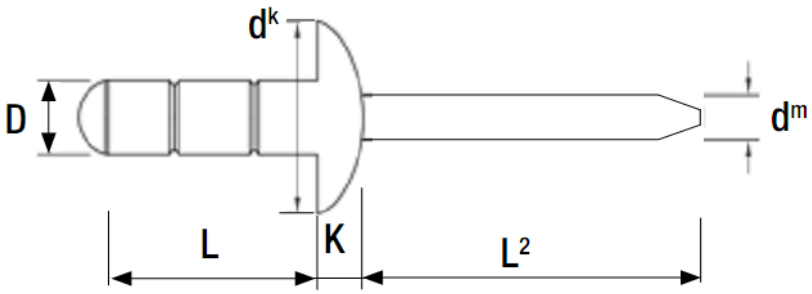



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
4.8	15.0	5.0	10.0	4.9	9.5	2.0	2.78	28.0	1500	2350	500