
RS PRO Aluminium/Steel Dome Head Blind Rivet, 4.8 mm Diameter x 15 mm long

Supplier Part Number: OJCLASDM4815JG

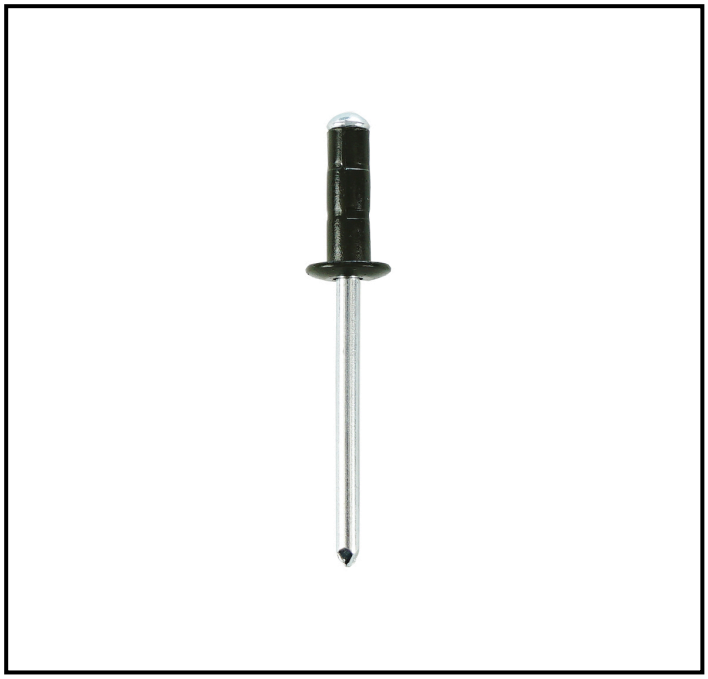

FEATURES

- **Rivet Diameter:** 4.8 mm for precise fitting and secure fastening
- **Rivet Length:** 15 mm suitable for a range of material thicknesses
- **Head Type:** Dome head for a neat and flush finish
- **Mandrel Material:** Steel mandrel for enhanced strength and durability
- **Finish:** Clear trivalent chromate zinc for corrosion resistance
- **Grip Range:** 5 mm to 10 mm accommodating various material thicknesses
- **Standards:** Complies with DIN 7337 and ISO standards for quality assurance

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO Aluminium Blind Rivet is designed for secure fastening in a variety of materials. With a rivet diameter of 4.8 mm and a length of 15 mm, it is ideal for applications requiring a strong and reliable hold. The aluminium body ensures lightweight durability, while the steel mandrel provides additional strength.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	4.9 mm
Mandrel Material	Steel
Maximum Grip	10 mm
Minimum Grip	5 mm


Mechanical Specifications

Head Diameter	9.5 mm
Rivet Body Material	Aluminium
Rivet Diameter	4.8 mm
Rivet Length	15 mm
Shear Strength	1500 N
Tensile Strength	2350 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Additional Image 1

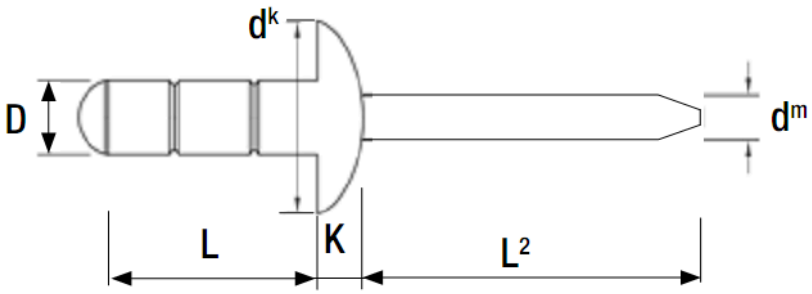



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
4.8	15.0	5.0	10.0	4.9	9.5	2.0	2.78	28.0	1500	2350	500