RS PRO A4/316 Stainless Steel Countersunk Head Blind Rivet Nut, M5 x 13 mm long

Supplier Part Number: RNSS4CH0535



FEATURES

- **Material:** A4/316 stainless steel offers superior corrosion resistance.
- **Thread Size:** M5 thread size ensures compatibility with a wide range of applications.
- **Length:** 13 mm length provides a secure fit for various installation requirements.
- **Fixing Hole Diameter:** 7 mm fixing hole diameter allows for easy installation.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

RS PRO offers a high-quality M5 rivet nut designed for secure fastening applications. Made from A4/316 stainless steel, this rivet nut provides excellent corrosion resistance, making it ideal for use in harsh environments. Its robust construction ensures reliable performance in various industrial settings.


General Specifications


Material	A4/316 Stainless Steel
Product Type	Rivet Nut
Sub Type	Nut
Thread Size	M5
Fixing Hole Diameter	7 mm
Head Type	Countersunk


Mechanical Specifications

Diameter	6.9 mm
Length	13 mm
Maximum Grip	2 mm
Minimum Grip	0.5 mm
Shear Strength	2000 N
Tensile Strength	10000 N
Maximum Tightening Torque	6 Nm

Technical Diagrams

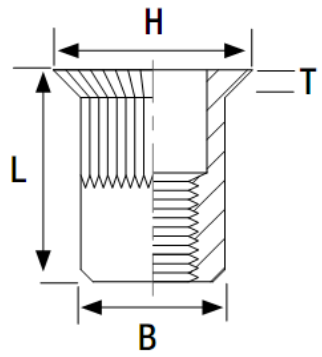

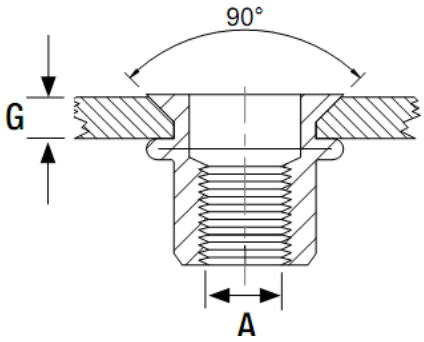



Thread Size mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Body Diameter mm	Flange Diameter mm	Flange Thickness mm	Body Overall Length mm	Max Tightening Torque Nm	Tensile Strength N	Box Quantity
A	G	G		B	H	T	L			
M3	0.5	1.5	5.0	4.9	7.5	1.5	8.5	1.0	3900	2000
M4	0.5	2.0	6.0	5.9	9.0	1.5	12.0	3.0	6800	1500
M5	0.5	2.0	7.0	6.9	10.0	1.5	13.0	6.0	10000	1000
M6	0.5	2.5	9.0	8.9	12.0	1.5	15.5	10.0	15000	500
M8	0.5	3.0	11.0	10.9	14.0	1.5	18.5	24.0	27000	300
M10	1.0	3.5	13.0	12.9	16.0	1.7	21.0	32.0	28500	150