
RS PRO A4/316 Stainless Steel Reduced Head Blind Rivet Nut, M6 x 16mm long

Supplier Part Number: RNSS4RHPH0630

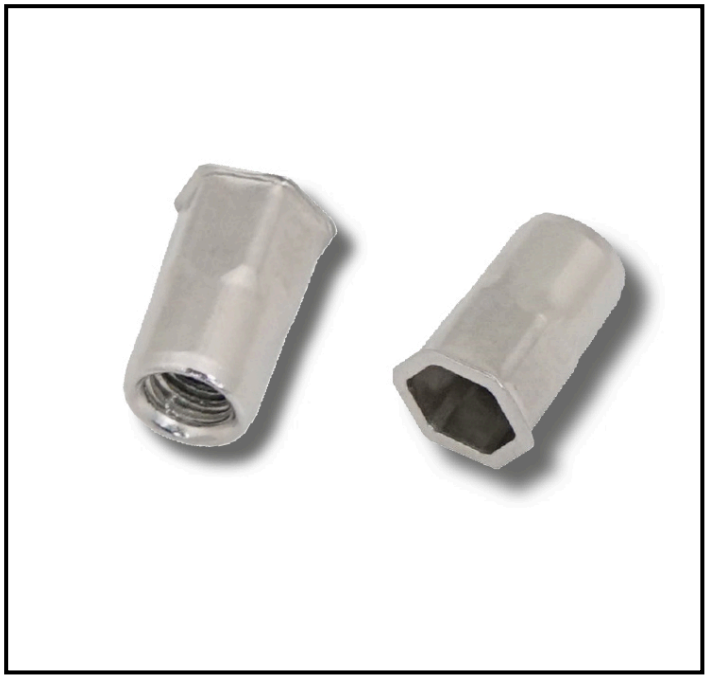

FEATURES

- **Material:** A4/316 stainless steel ensures high corrosion resistance and durability.
- **Diameter:** 8.9 mm diameter for precise fitting in pre-drilled holes.
- **Thread Size:** M6 thread size provides compatibility with standard M6 bolts and screws.
- **Fixing Hole Diameter:** 9 mm fixing hole diameter allows for easy installation.
- **Length:** 16 mm length offers a secure grip and stability.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO M6 Rivet Nut is designed for secure fastening in various industrial applications. Made from A4/316 stainless steel, it offers excellent corrosion resistance, making it ideal for use in harsh environments. This rivet nut is perfect for applications requiring a strong, reliable threaded insert.


General Specifications


Material	A4/316 Stainless Steel
Product Type	Rivet Nut
Sub Type	Nut
Thread Size	M6
Fixing Hole Diameter	9 mm
Head Type	Reduced


Mechanical Specifications

Diameter	8.9 mm
Length	16 mm
Maximum Grip	3 mm
Minimum Grip	1 mm
Shear Strength	3000 N
Tensile Strength	15000 N
Maximum Tightening Torque	12 Nm

Technical Diagrams



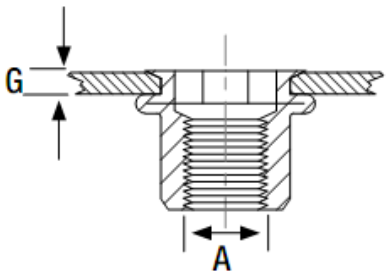



Thread Size mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Body Diameter mm	Flange Diameter mm	Flange Thickness mm	Body Overall Length mm	Max Tightening Torque Nm	Tensile Strength N	Box Quantity
A	G	G		B	H	T	L			
M4	0.5	2.0	6.0	5.9	7.0	0.5	12.0	4.0	6800	1500
M5	0.5	2.5	7.0	6.9	8.0		13.0	6.5	10000	1000
M6	1.0	3.0	9.0	8.9	10.0	0.6	16.0	12.0	15000	500
M8	1.0	3.5	11.0	10.9	12.5		17.5	31.0	27000	300
M10	1.0	4.0	13.0	12.9	14.3	0.9	21.0	42.0	28500	150