RS PRO A2/304 Stainless Steel Countersunk Head Blind Rivet Nut, M5 x 20mm long

Supplier Part Number: RNSSCHC0535



FEATURES

- **Material:** A2/304 stainless steel provides superior corrosion resistance.
- **Diameter:** 6.9 mm ensures compatibility with standard applications.
- **Length:** 20 mm for secure and stable fastening.
- **Thread Size:** M5 for precise and reliable threading.
- **Fixing Hole Diameter:** 7 mm for easy installation.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

RS PRO offers a high-quality M5 rivet nut designed for secure fastening in various industrial applications. Made from A2/304 stainless steel, this rivet nut provides excellent corrosion resistance and durability, making it suitable for use in harsh environments. Its 6.9 mm diameter and 20 mm length ensure a reliable fit for a wide range of materials.


General Specifications


Material	A2/304 Stainless Steel
Product Type	Rivet Nut
Sub Type	Nut
Thread Size	M5
Fixing Hole Diameter	7 mm
Head Type	Countersunk


Mechanical Specifications

Diameter	6.9 mm
Length	20 mm
Maximum Grip	3.5 mm
Minimum Grip	1.5 mm
Shear Strength	2000 N
Tensile Strength	10000 N
Maximum Tightening Torque	6 Nm

Technical Diagrams



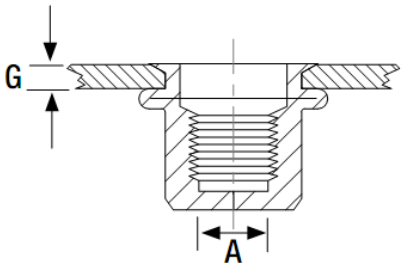



Thread Size mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Body Diameter mm	Flange Diameter mm	Flange Body Overall Thickness mm Length mm (T) (L)	Max Tightening Torque Nm	Tensile Strength N	Box Quantity
A	G	G		B	H				
M4	1.5	3.5	6.0	5.9	9.0	17.5	3.0	6800	1000
M5	1.5	3.5	7.0	6.9	10.0	20.0	6.0	10000	500
M6	1.5	4.0	9.0	8.9	12.0	23.0	10.0	15000	500
M8	1.5	4.5	11.0	10.9	14.0	26.5	24.0	27000	250
M10	1.5	5.0	13.0	12.9	16.0	1.7 30.0	32.0	28500	100