


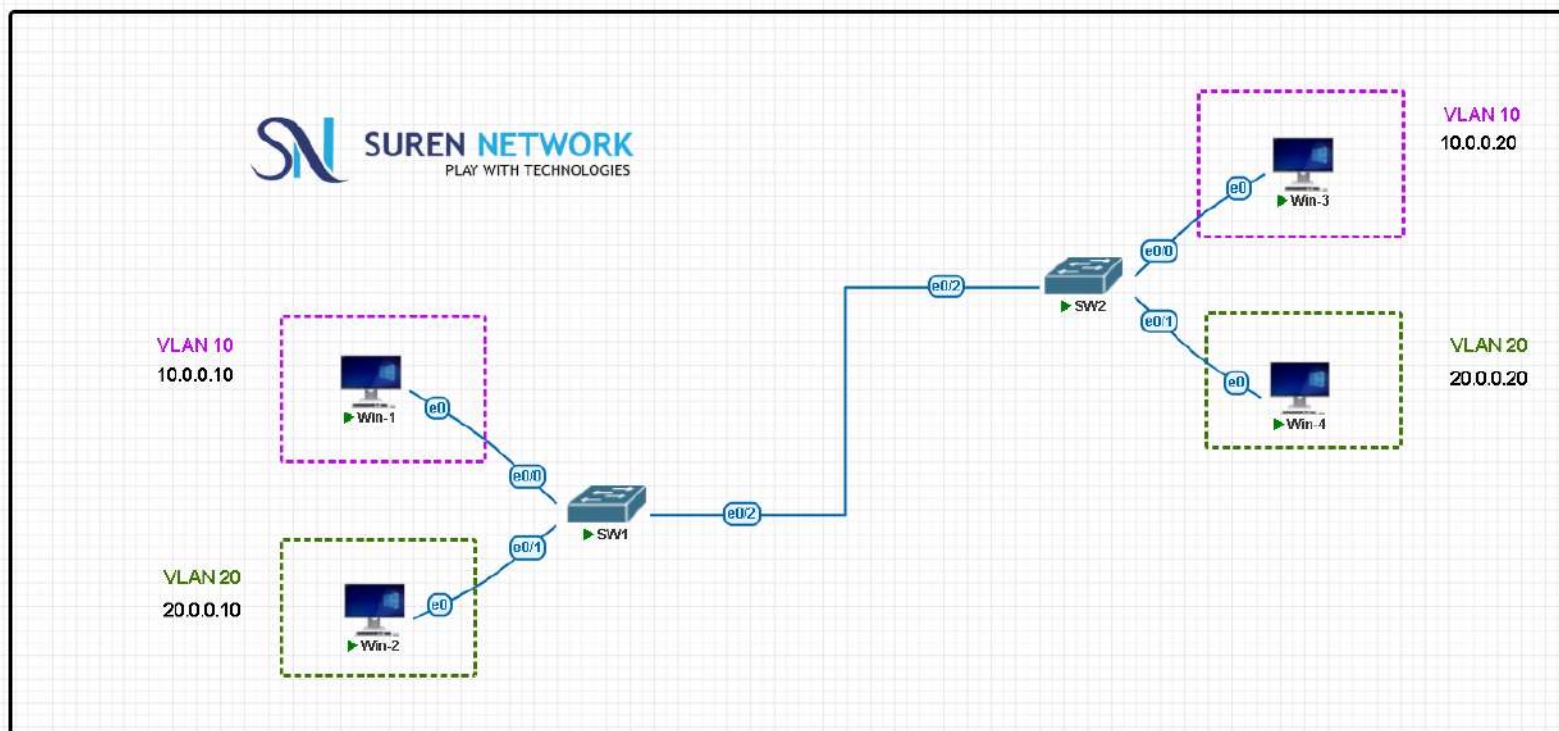

PNETLab | Topology

labs.surennetwork.com/legacy/topology

AppsPNETLab | Lab is S...Suren Network | Lea...LinkedInNaukriSN-NetworkSNnetwork CCNASN Local LoginSN Static Login(99) Suren Network...All Bookmarks

Ask Gemini

Notifications

SW1

SW1#sh vlan brief

VLAN	Name	Status	Ports
1	default	active	Et0/2, Et0/3
10	HR	active	Et0/0
20	sales	active	Et0/1
1002	fddi-default	act/unsup	
1003	token-ring-default	act/unsup	
1004	fddinet-default	act/unsup	
1005	trnet-default	act/unsup	

SW1#

*Aug 10 08:32:27.471: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)

SW1#conf t

Enter configuration commands, one per line. End with CNTL/Z.

SW1(config)#int e0/2

SW1(config-if)#switchport trunk encapsulation dot1q

SW1(config-if)#switchport mode trunk

SW1(config-if)#exit

SW1(config)#exit

SW1#sh

*Aug 10 08:34:09.949: %SYS-5-CONFIG_I: Configured from console by console

SW1#

SW2

Enter configuration commands, one per line. End with CNTL/Z.

SW2(config)#vlan 10

SW2(config-vlan)#name HR

SW2(config-vlan)#EXIT

SW2(config)#vlan 20

SW2(config-vlan)#name sales

SW2(config-vlan)#exit

SW2(config)#int e0/0

SW2(config-if)#switchport access vlan 10

SW2(config-if)#exit

SW2(config)#int e0/1

SW2(config-if)#switchport access vlan 20

SW2(config-if)#exit

SW2(config)#int e0/2

SW2(config-if)#switchport trunk encapsulation dot1q

SW2(config-if)#switchport mode trunk

SW2(config-if)#exit

SW2(config)#exit

SW2#

*Aug 10 08:36:57.429: %SYS-5-CONFIG_I: Configured from console by console

SW2#

*Aug 10 08:39:18.109: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)

SW2#

VLAN 20
20.0.0.10

Win-2

VLAN 10
10.0.0.20

Win-3

SW1

SW2

Physical

501.00.00

START

QEMU (Win-1)

```
C:\WINDOWS\system32\cmd.exe
Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.

C:\Documents and Settings\user>ipconfig

Windows IP Configuration

Ethernet adapter Local Area Connection:

    Connection-specific DNS Suffix  . : 
    IP Address. . . . . : 10.0.0.10
    Subnet Mask . . . . . : 255.0.0.0
    Default Gateway . . . . . : 

C:\Documents and Settings\user>ping 10.0.0.20

Pinging 10.0.0.20 with 32 bytes of data:

Reply from 10.0.0.20: bytes=32 time=1ms TTL=128
Reply from 10.0.0.20: bytes=32 time=2ms TTL=128
Reply from 10.0.0.20: bytes=32 time=1ms TTL=128
Reply from 10.0.0.20: bytes=32 time=2ms TTL=128

Ping statistics for 10.0.0.20:

    Internet Explorer
```

QEMU (Win-2)

```
C:\WINDOWS\system32\cmd.exe
Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.

C:\Documents and Settings\user>ipconfig

Windows IP Configuration

Ethernet adapter Local Area Connection:

    Connection-specific DNS Suffix  . : 
    IP Address. . . . . : 20.0.0.10
    Subnet Mask . . . . . : 255.0.0.0
    Default Gateway . . . . . : 

C:\Documents and Settings\user>ping 20.0.0.20

Pinging 20.0.0.20 with 32 bytes of data:

Reply from 20.0.0.20: bytes=32 time=5ms TTL=128
Reply from 20.0.0.20: bytes=32 time=1ms TTL=128
Reply from 20.0.0.20: bytes=32 time=2ms TTL=128
Reply from 20.0.0.20: bytes=32 time=2ms TTL=128

Ping statistics for 20.0.0.20:
```

Internet Explorer

QEMU (Win-3)

```
C:\WINDOWS\system32\cmd.exe
Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.

C:\Documents and Settings\user>ipconfig

Windows IP Configuration

Ethernet adapter Local Area Connection:

    Connection-specific DNS Suffix  . : 
    IP Address. . . . . : 10.0.0.20
    Subnet Mask . . . . . : 255.0.0.0
    Default Gateway . . . . . : 

C:\Documents and Settings\user>ping 10.0.0.10

Pinging 10.0.0.10 with 32 bytes of data:

Reply from 10.0.0.10: bytes=32 time=2ms TTL=128
Reply from 10.0.0.10: bytes=32 time=2ms TTL=128
Reply from 10.0.0.10: bytes=32 time=1ms TTL=128
Reply from 10.0.0.10: bytes=32 time=2ms TTL=128

Ping statistics for 10.0.0.10:
```

Internet Explorer

QEMU (Win-4)

```
C:\WINDOWS\system32\cmd.exe
Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.

C:\Documents and Settings\user>ipconfig

Windows IP Configuration

Ethernet adapter Local Area Connection:

    Connection-specific DNS Suffix  . : 
    IP Address. . . . . : 20.0.0.20
    Subnet Mask . . . . . : 255.0.0.0
    Default Gateway . . . . . : 

C:\Documents and Settings\user>ping 20.0.0.10

Pinging 20.0.0.10 with 32 bytes of data:

Reply from 20.0.0.10: bytes=32 time=2ms TTL=128
Reply from 20.0.0.10: bytes=32 time=2ms TTL=128
Reply from 20.0.0.10: bytes=32 time=1ms TTL=128
Reply from 20.0.0.10: bytes=32 time=2ms TTL=128

Ping statistics for 20.0.0.10:
```

Internet Explorer

Cisco ASDM-1...

SW2

e0/0

e0/1