


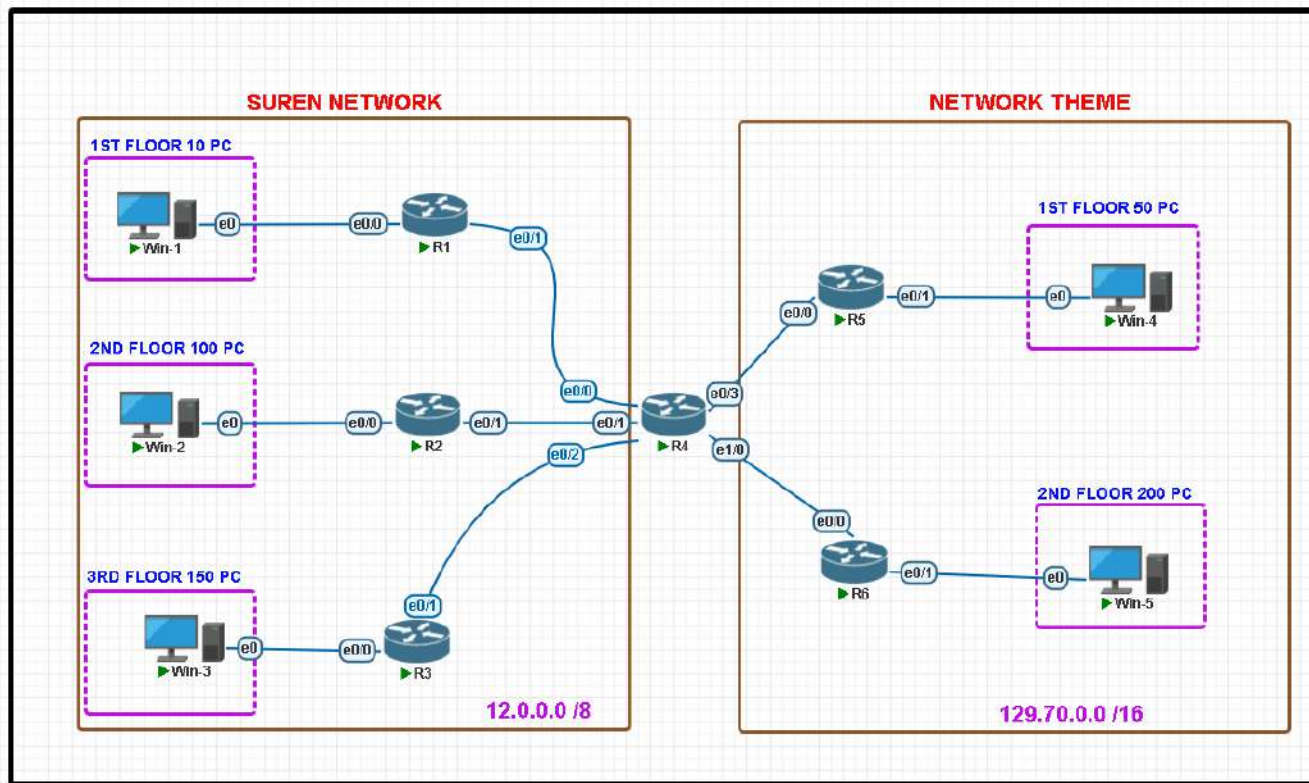

PNETLab | Topology

labs.surennetwork.com/legacy/topo

PNETLab | Labs S... Suren Network

1ST FLOOR 10 PC

Win-1

SUREN NET

R1

```
R1(config-if)#ip add 12.0.1.153 255.255.255.252
R1(config-if)#no shutdown
R1(config-if)#exit
R1(config)#exit
R1#
*Aug  4 18:29:22.301: %SYS-5-CONFIG_I: Configured from console by console
R1#sh ip int brief
Interface              IP-Address      OK? Method Status  Prot
-----
e0/0/1
Ethernet0/0            12.0.1.129      YES manual up      up
Ethernet0/1            12.0.1.153      YES manual up      up
Ethernet0/2            unassigned      YES TFTP  down    down
Ethernet0/3            unassigned      YES TFTP  down    down
R1#conf t
Enter configuration commands, one per line. End with CNTL/Z.
R1(config)#ip route 0.0.0.0 0.0.0.0 12.0.1.154
R1(config)#exit
R1#
*Aug  4 18:50:51.206: %SYS-5-CONFIG_I: Configured from console by console
R1#
```

R2

```
R2(config-if)#no shutdown
R2(config-if)#exit
R2(config)#exit
R2#sh ipi
*Aug  4 18:30:05.894: %SYS-5-CONFIG_I: Configured from console by console
R2#sh ip int brief
Interface              IP-Address      OK? Method Status  Prot
-----
e0/0/1
Ethernet0/0            12.0.1.1        YES manual up      up
Ethernet0/1            12.0.1.149      YES manual up      up
Ethernet0/2            unassigned      YES TFTP  down    down
Ethernet0/3            unassigned      YES TFTP  down    down
R2#conf t
Enter configuration commands, one per line. End with CNTL/Z.
R2(config)#ip route 0.0.0.0 0.0.0.0 12.0.1.150
R2(config)#exit
R2#
*Aug  4 18:49:59.754: %SYS-5-CONFIG_I: Configured from console by console
R2#
```

R3

```
R3(config)#int e0/1
R3(config-if)#ip add 12.0.1.145 255.255.255.252
R3(config-if)#no shutdown
R3(config-if)#exit
R3(config)#exit
R3#sh
*Aug  4 18:31:08.507: %LINK-3-UPDOWN: Interface Ethernet0/1, changed state to up
*Aug  4 18:31:08.527: %SYS-5-CONFIG_I: Configured from console by console
*Aug  4 18:31:09.507: %LINEPROTO-5-UPDOWN: Line protocol on Interface Ethernet0/1, changed state to up
R3#sh ip int brief
Interface              IP-Address      OK? Method Status  Prot
-----
e0/0/1
Ethernet0/0            12.0.0.1        YES manual up      up
Ethernet0/1            12.0.1.145      YES manual up      up
Ethernet0/2            unassigned      YES unset  administratively down down
Ethernet0/3            unassigned      YES unset  administratively down down
R3#
```

R6

129.1

ENG IN 12:38 AM 05-08-2026

PNETLab | Topology

labs.surennetwork.com/legacy/topo

PNETLab | Labs S... Suren Network

SUREN NET

1ST FLOOR 10 PC

Win-1

R4

R4(config)#exit
R4#
*Aug 4 18:41:54.550: %SYS-5-CONFIG_I: Configured from console by console
R4#sh ip i
*Aug 4 18:41:54.856: %LINK-3-UPDOWN: Interface Ethernet1/0, changed state to up
*Aug 4 18:41:55.856: %LINEPROTO-5-UPDOWN: Line protocol on Interface Ethernet1/0, changed state to up
R4#sh ip int brief
Interface IP-Address OK? Method Status Prot
ocol
Ethernet0/0 12.0.1.154 YES manual up up
Ethernet0/1 12.0.1.150 YES manual up up
Ethernet0/2 12.0.1.146 YES manual up up
Ethernet0/3 129.70.1.194 YES manual up up
Ethernet1/0 129.70.1.198 YES manual up up
Ethernet1/1 unassigned YES unset administratively down down
Ethernet1/2 unassigned YES unset administratively down down

R5

R5(config)#exit
R5#sh
*Aug 4 18:45:35.360: %SYS-5-CONFIG_I: Configured from console by console
R5#sh ip int brief
Interface IP-Address OK? Method Status Prot
ocol
Ethernet0/0 129.70.1.193 YES manual up up
Ethernet0/1 129.70.1.1 YES manual up up
Ethernet0/2 unassigned YES TFTP down down
Ethernet0/3 unassigned YES TFTP down down
R5#
*Aug 4 18:48:00.222: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)
R5#conf t
Enter configuration commands, one per line. End with CNTL/Z.
R5(config)#ip route 0.0.0.0 0.0.0.0 129.70.1.194
R5(config)#exit
R5#
*Aug 4 18:48:46.152: %SYS-5-CONFIG_I: Configured from console by console
R5#

R6

R6(config)#exit
R6#sh ip int
*Aug 4 18:47:23.167: %SYS-5-CONFIG_I: Configured from console by console
R6#sh ip int brief
Interface IP-Address OK? Method Status Prot
ocol
Ethernet0/0 129.70.1.197 YES manual up up
Ethernet0/1 129.70.0.1 YES manual up up
Ethernet0/2 unassigned YES TFTP down down
Ethernet0/3 unassigned YES TFTP down down
R6#
R6#conf t
Enter configuration commands, one per line. End with CNTL/Z.
R6(config)#ip route 0.0.0.0 0.0.0.0 129.70.1.198
R6(config)#exit
R6#
*Aug 4 18:48:11.733: %SYS-5-CONFIG_I: Configured from console by console
R6#
*Aug 4 18:48:14.345: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)

129.70.1.198

ENG IN

12:39 AM 05-08-2026

QEMU (Win-1)

```
Network Connections
C:\WINDOWS\system32\cmd.exe
Windows IP Configuration

Ethernet adapter Local Area Connection:

    Connection-specific DNS Suffix  . : 12.0.1.130
    IP Address. . . . . : 255.255.255.240
    Subnet Mask . . . . . : 12.0.1.129
    Default Gateway . . . . . :

C:\Documents and Settings\user>ping 12.0.1.129

Pinging 12.0.1.129 with 32 bytes of data:

Reply from 12.0.1.129: bytes=32 time=1ms TTL=255
Reply from 12.0.1.129: bytes=32 time=1ms TTL=255
Reply from 12.0.1.129: bytes=32 time=1ms TTL=255
Reply from 12.0.1.129: bytes=32 time=1ms TTL=255

Ping statistics for 12.0.1.129:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 1ms, Average = 1ms

C:\Documents and Settings\user>
```

QEMU (Win-3)

```
Network Connections
C:\WINDOWS\system32\cmd.exe
Windows IP Configuration

Ethernet adapter Local Area Connection:

    Connection-specific DNS Suffix  . : 12.0.0.2
    IP Address. . . . . : 255.255.255.0
    Subnet Mask . . . . . : 12.0.0.1
    Default Gateway . . . . . :

C:\Documents and Settings\user>ping 12.0.1.1

Pinging 12.0.1.1 with 32 bytes of data:

Reply from 12.0.1.1: bytes=32 time=2ms TTL=253
Reply from 12.0.1.1: bytes=32 time=1ms TTL=253
Reply from 12.0.1.1: bytes=32 time=2ms TTL=253
Reply from 12.0.1.1: bytes=32 time=1ms TTL=253

Ping statistics for 12.0.1.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 2ms, Average = 1ms

C:\Documents and Settings\user>
```

QEMU (Win-2)

```
Network Connections
C:\WINDOWS\system32\cmd.exe
Windows IP Configuration

Ethernet adapter Local Area Connection:

    Connection-specific DNS Suffix  . : 12.0.1.2
    IP Address. . . . . : 255.255.255.128
    Subnet Mask . . . . . : 12.0.1.1
    Default Gateway . . . . . :

C:\Documents and Settings\user>ping 12.0.1.130

Pinging 12.0.1.130 with 32 bytes of data:

Reply from 12.0.1.130: bytes=32 time=3ms TTL=125
Reply from 12.0.1.130: bytes=32 time=2ms TTL=125
Reply from 12.0.1.130: bytes=32 time=2ms TTL=125
Reply from 12.0.1.130: bytes=32 time=2ms TTL=125

Ping statistics for 12.0.1.130:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 2ms, Maximum = 3ms, Average = 2ms

C:\Documents and Settings\user>
```

QEMU (Win-4)

```
Network Connections
C:\WINDOWS\system32\cmd.exe
Windows IP Configuration

Ethernet adapter Local Area Connection:

    Connection-specific DNS Suffix  . : 129.70.1.2
    IP Address. . . . . : 255.255.255.192
    Subnet Mask . . . . . : 129.70.1.1
    Default Gateway . . . . . :

C:\Documents and Settings\user>ping 12.0.1.1

Pinging 12.0.1.1 with 32 bytes of data:

Reply from 12.0.1.1: bytes=32 time=2ms TTL=253
Reply from 12.0.1.1: bytes=32 time=1ms TTL=253
Reply from 12.0.1.1: bytes=32 time=2ms TTL=253
Reply from 12.0.1.1: bytes=32 time=1ms TTL=253

Ping statistics for 12.0.1.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 2ms, Average = 1ms

C:\Documents and Settings\user>
```

QEMU (Win-5)

```
Network Connections
C:\WINDOWS\system32\cmd.exe
Windows IP Configuration

Ethernet adapter Local Area Connection:

    Connection-specific DNS Suffix  . : 129.70.0.2
    IP Address. . . . . : 255.255.255.0
    Subnet Mask . . . . . : 129.70.0.1
    Default Gateway . . . . . :

C:\Documents and Settings\user>ping 12.0.1.1

Pinging 12.0.1.1 with 32 bytes of data:

Reply from 12.0.1.1: bytes=32 time=3ms TTL=253
Reply from 12.0.1.1: bytes=32 time=2ms TTL=253
Reply from 12.0.1.1: bytes=32 time=1ms TTL=253
Reply from 12.0.1.1: bytes=32 time=12ms TTL=253

Ping statistics for 12.0.1.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 12ms, Average = 4ms

C:\Documents and Settings\user>ping 12.0.1.129
```