OPERATING SYSTEM

Memory Management – Case Study

Dr Rahul Nagpal
Computer Science

OPERATING SYSTEM

Memory Management – Case Study

Dr. Rahul Nagpal
Computer Science

Operating System Examples

- H/W Support in Intel Architceture
- Windows
- Solaris

Example: The Intel IA 32 Architecture

- Supports both segmentation and segmentation with paging
  - Each segment can be 4 GB
  - Up to 16 K segments per process
  - Divided into two partitions
    - First partition of up to 8 K segments are private to process (kept in **local descriptor table** (**LDT**))
    - Second partition of up to 8K segments shared among all processes (kept in **global descriptor table** (**GDT**))

Example: The Intel IA 32 Architecture (contd.)

- CPU generates logical address
  - Selector given to segmentation unit
    - Which produces linear addresses



  - Linear address given to paging unit
    - Which generates physical address in main memory
    - Paging units form equivalent of MMU
    - Pages sizes can be 4 KB or 4 MB

Logical to Physical Address Translation in IA32

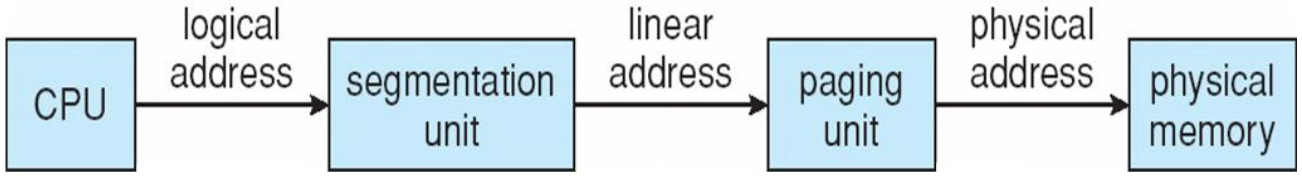

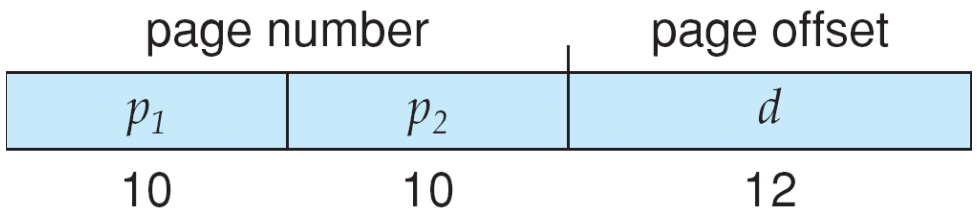

Intel IA32 Segmentation

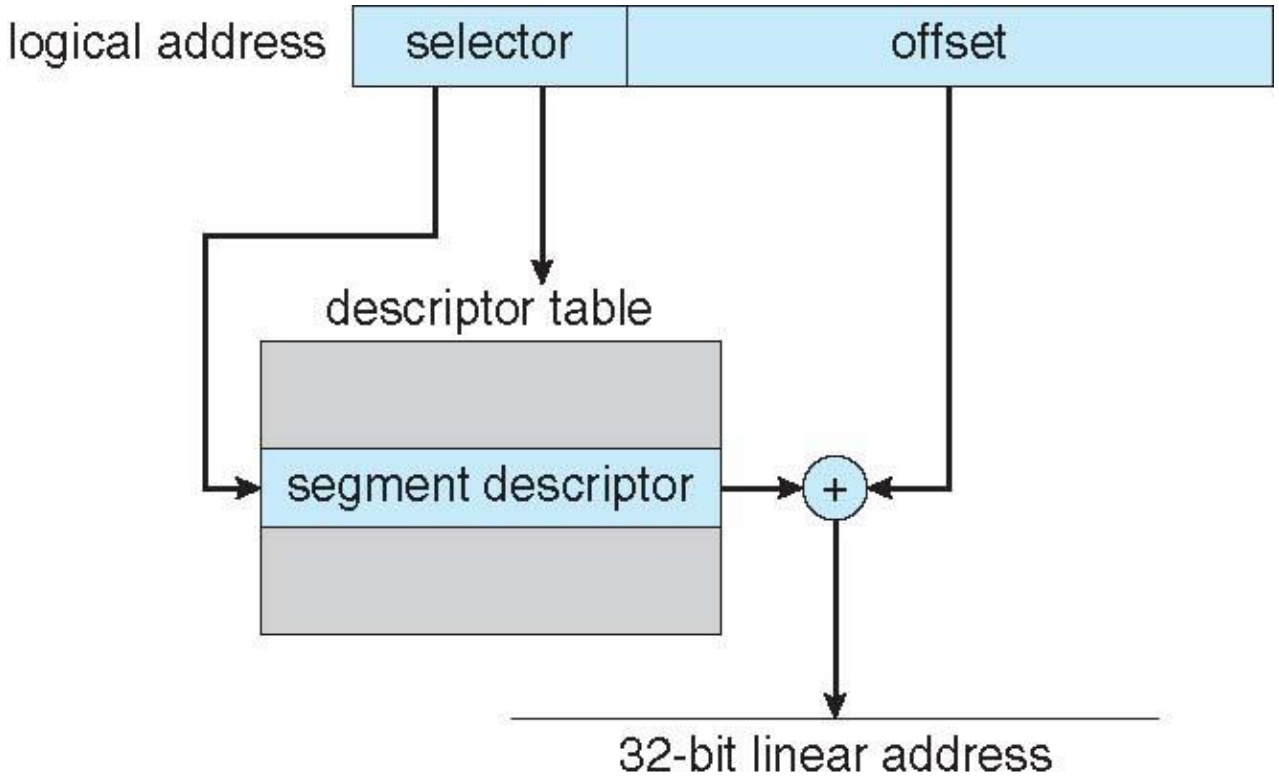

Intel IA32 Paging Architecture

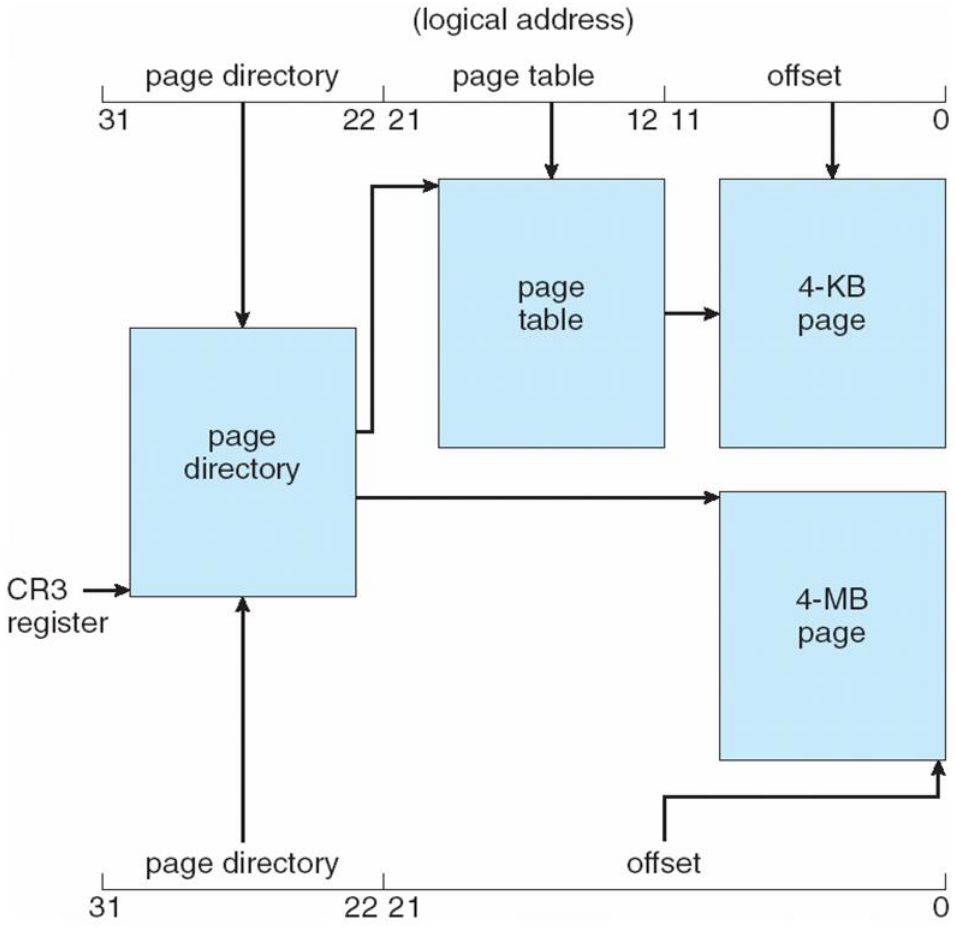

Intel IA32 Page Address Extension

- 32-bit address limits led Intel to create **page address extension** (**PAE**), allowing 32-bit apps access to more than 4GB of memory space
  - Paging went to a 3-level scheme
  - Top two bits refer to a **page directory pointer table**
  - Page-directory and page-table entries moved to 64-bits in size
  - Net effect is increasing address space to 36 bits – 64GB of physical memory

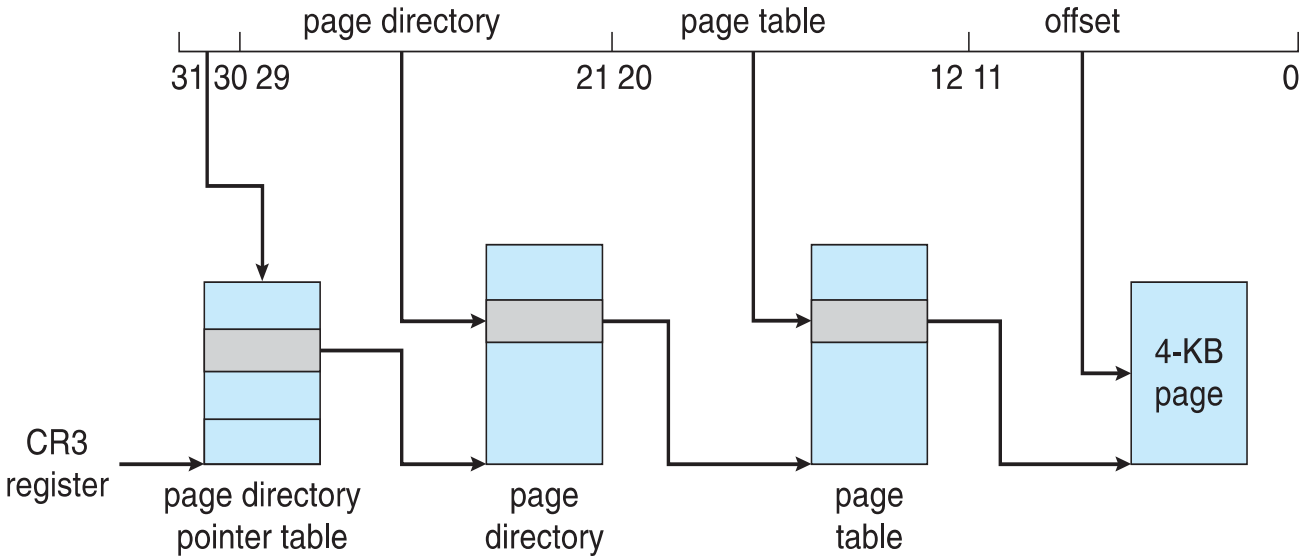

Intel X86-64

- Current generation Intel x86 architecture
- 64 bits is ginormous (> 16 exabytes)
- In practice only implement 48 bit addressing
  - Page sizes of 4 KB, 2 MB, 1 GB
  - Four levels of paging hierarchy
- Can also use PAE so virtual addresses are 48 bits and physical addresses are 52 bits

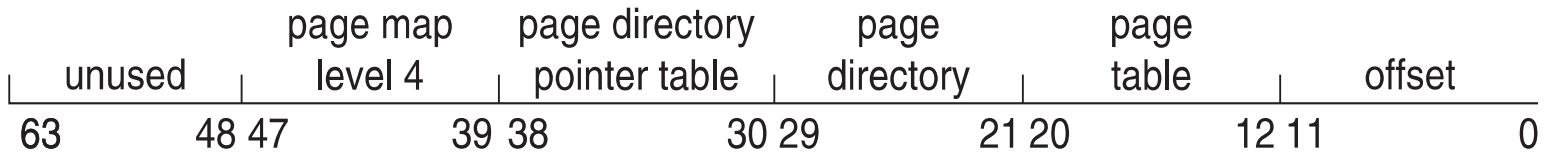

- Uses demand paging with **clustering**. Clustering brings in pages surrounding the faulting page
- Processes are assigned **working set minimum** and **working set maximum**
- Working set minimum is the minimum number of pages the process is guaranteed to have in memory
- A process may be assigned as many pages up to its working set maximum
- When the amount of free memory in the system falls below a threshold, **automatic working set trimming** is performed to restore the amount of free memory
- Working set trimming removes pages from processes that have pages in excess of their working set minimum

Solaris

- Maintains a list of free pages to assign faulting processes
- **`Lotsfree`** – threshold parameter (amount of free memory) to begin paging
- **`Desfree`** – threshold parameter to increasing paging
- **`Minfree`** – threshold parameter to being swapping
- Paging is performed by **`pageout`** process
- **`Pageout`** scans pages using modified clock algorithm
- **`Scanrate`** is the rate at which pages are scanned. This ranges from **`slowscan`** to **`fastscan`**
- **`Pageout`** is called more frequently depending upon the amount of free memory available
- **Priority paging** gives priority to process code pages

OPERATING SYSTEMS

Solaris 2 Page Scanner

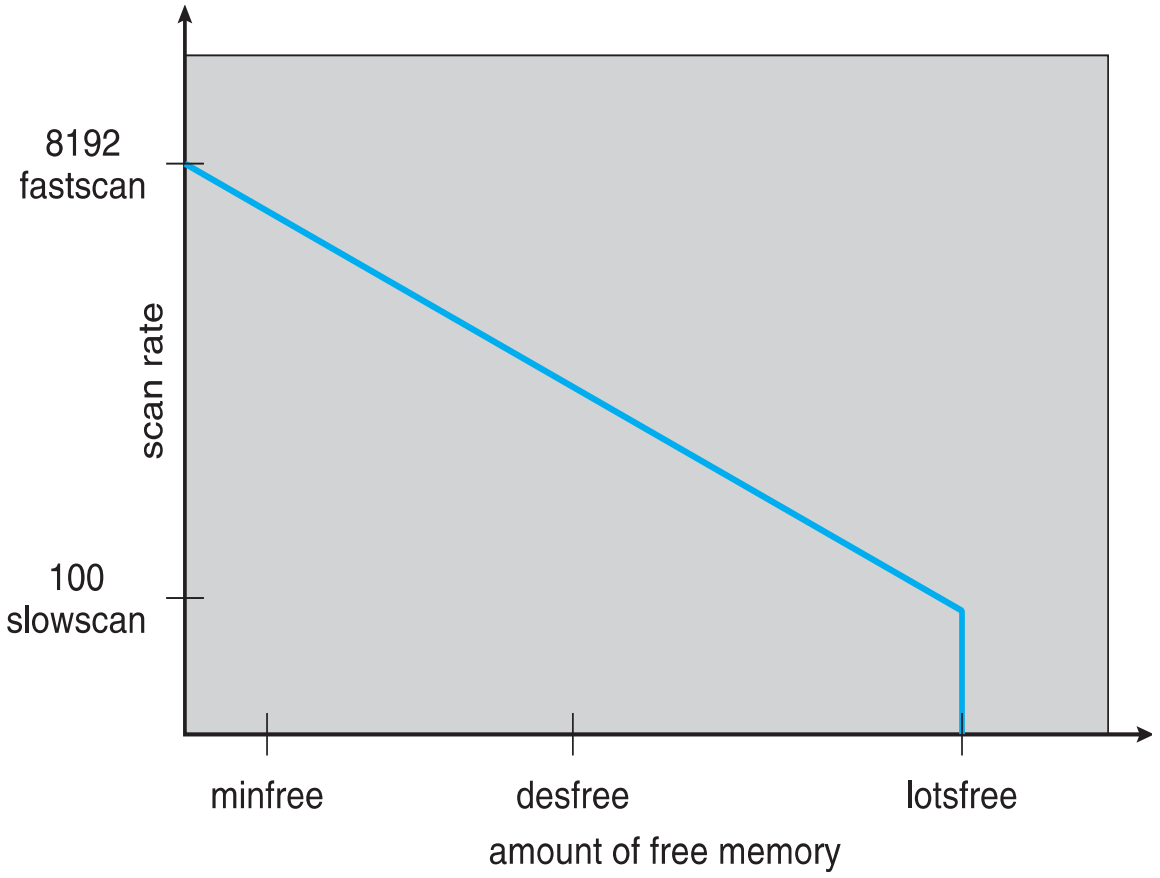

THANK YOU

Dr Rahul Nagpal

Computer Science

rahulnagpal@pes.edu