


Model: RPUTS-G

Automated UT System

Gantry Scanner Rotating Pipe UT System

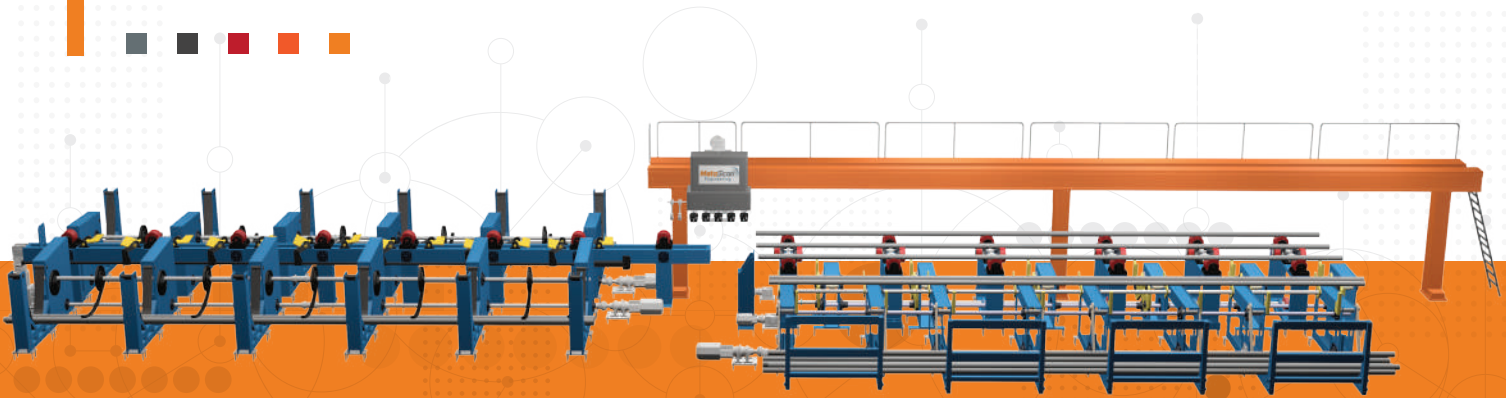

Pipe Ultrasonic Inspection, Rotating Pipe UT System (RPUTS) provides ultrasonic inspection for round tubular and bar products using Localised Water Hold Probe mechanism.



Features:

- Fully automated gantry based Ultrasonic Testing System.
- Full volumetric, conventional ultrasonic inspection of round products (seamless tubes/Pipes, billets etc.) using the synchronous rotation of the product and a linear travel of UT head on a gantry.
- Localised water hold technique for minimised testing water consumption.
- Optional surface inspection by Array Eddy Current technique.
- Wall thickness monitoring/checking.
- Typical inspection speeds up to 10m/min (with dual head configuration).
- Advanced digital data acquisition and reporting system.
- Optional pipe/tube/bar handling system (unscrambler, feeding table, reference, infeed, outfeed conveyor, accept/reject cradles, singling & Transfer mechanism with automation).

Specifications:

- Pipe dimensions : 50mm to 120mm OD.
- Thickness : 4 to 7.5mm
- Pipe length : 5 to 10mtr.
- Pipe straightness : within 1mm/m.
- UT Testing standard : EN 10246-7/ API 5L for UT Sensitivity

Localised Water Hold Probe Cluster:

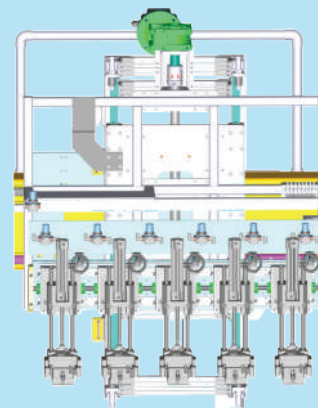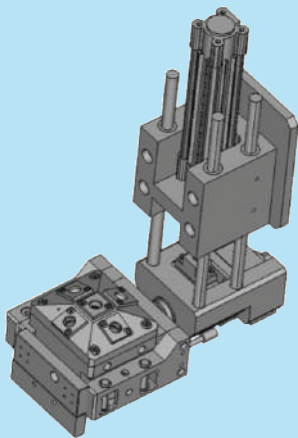

Data Acquisition Software:



Direct your enquire to:

E-mail: sales@metascan.co.in

MetaScan Engineering LLP
Kohinoor World Tower, 1001 and 1002,
10th Floor, Tower 2, Old Mumbai - Pune Hwy,
Pimpri, Pune, Maharashtra 411018