THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION AUGUST ,2005.
© COPYRIGHT 2005 By – ALL RIGHTS RESERVED.

LOC	DIST
E	B

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	F	ECO-13-005274	05JULY2013	RZ	MY

NOTES:

1. SINGLE PACK IN ACCORDANCE WITH AMP SPEC 107-3275
2. 100 TRAY PACK IN ACCORDANCE WITH AMP SPEC 107-3275
3. Au PLATING OVER Ni PLATING OVER Cu PLATING
4. Ni PLATING OVER Cu PLATING
5. TIN PLATING
6. MOUNTING POSTS ARE OPTIONAL SEE TABLE FOR PART NUMBERS
7. RECOMMENDED SELF-TAPPING SCREW 221108-4
8. RECOMMENDED MOUNT NUT 1-1634816-0
9. RECOMMENDED LOCKWASHER 1-1634817-0
10. FOR TECHNICAL DATA REFER TO YOUR LOCAL TE CONNECTIVITY SALES OFFICE
11. ALL DIMENSIONS ARE NOMINAL FOR REFERENCE ONLY UNLESS OTHERWISE STATED

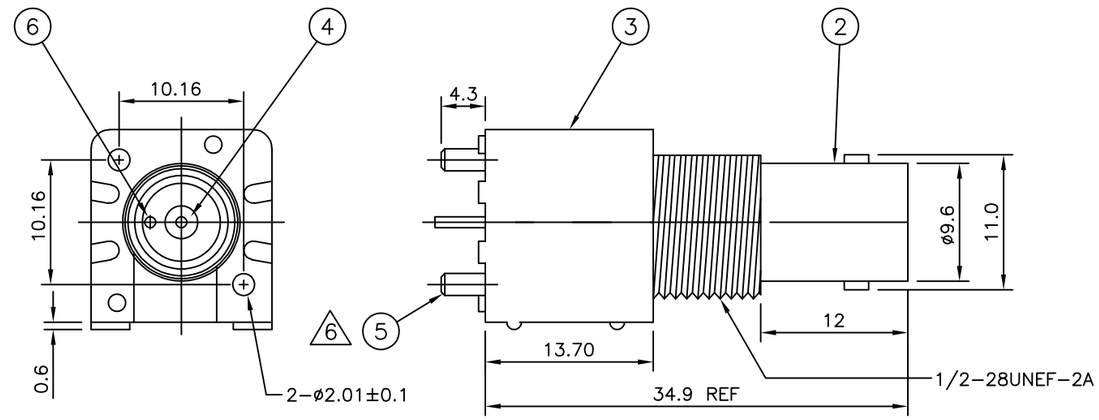

VIEW WITHOUT MOUNTING POSTS

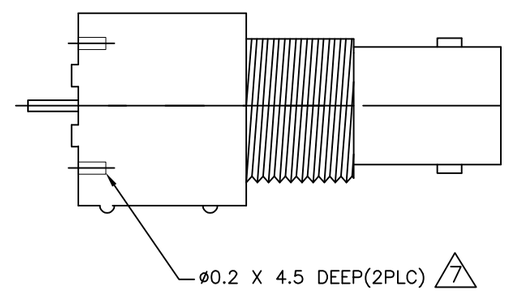

RECOMMENDED MOUNTING HOLE
MAX PANEL THICKNESS: 5.5mm



RECOMMENDED PCB LAYOUT
WITH MOUNTING POSTS OR BOARD LOCKS

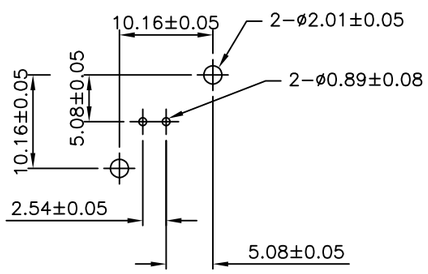

RECOMMENDED PCB LAYOUT
WITHOUT MOUNTING POSTS

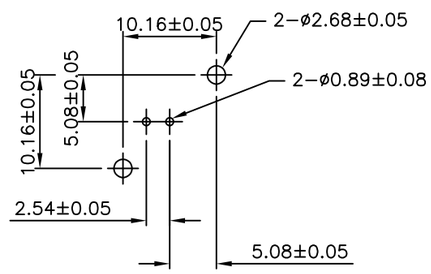

			OBSOLETE	OBSOLETE					
			1	1	1	1	BRASS 5	SOLDER TAIL	6
			–	–	1	1	BRASS 5	MOUNTING POST	5
			1	1	1	1	PE-606	INSULATOR	4
			1	1	1	1	PBT WHITE	HOUSING	3
			1	1	1	1	ZINC ALLOY 4	BODY	2
			1	1	1	1	BRASS 3	CONTACT	1
			6--1	1--1	6--0	1--0	MATERIAL	DESCRIPTION	ITEM
			2	1	2	1			
QUANTITY PER ASSY							PARTS LIST		

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± 0.5
1 PLC	± 0.3
2 PLC	± 0.2
3 PLC	± –
4 PLC	± –
ANGLES	± –

MATERIAL: SEE TABLE

FINISH: SEE TABLE

DWN	RITA ZUO	04 Mar 09
CHK	ANSON MA	04 Mar 09
APVD	BOB ZHAO	04 Mar 09

PRODUCT SPEC: 108-112000

APPLICATION SPEC: –

WEIGHT: –

TE Connectivity

NAME: BNC STRAIGHT INSULATED PCB SOCKET 50 OHM WHITE –

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-1337541	–

CUSTOMER DRAWING

SCALE	SHEET	REV
NTS	1 OF 1	F