


**TANDY...
Clearly Superior™**



**DT-100
Data Display Terminal**

Our low-cost DT-100 Data Display terminal allows you to multiply your office productivity without having to buy separate computers for each user.

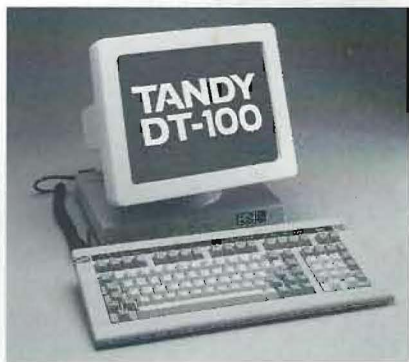

Tandy DT-100 Data Display Terminal

Increase Office Productivity for Less.

The Tandy DT-100 Data Terminal is the perfect workstation for multi-user systems built around the XENIX-based Tandy 6000 microcomputer. It's an ergonomically designed, contemporarily styled terminal for business and professional multi-user systems.

Cost Efficient

Costing just a fraction of the price of separate personal computers, DT-100 Data Terminals share the power of the Tandy 6000 affordably throughout an office or department. The DT-100 retains its current emulation mode with the power off and features a large 14" easy-to-read screen. It displays 80 or 132 columns by 26 lines, and supports normal, underline, reverse and half-intensity video display.

Communications Links

The asynchronous DT-100 terminal may be used on the Tandy 6000 and most DEC multi-user systems, as well as systems based on the UNIX Operating System. The DT-100 offers variable rates of data transfer. It includes two RS-232C communications ports. An optional serial-to-parallel converter allows output to a parallel printer while operating under XENIX.

Professional Keyboard

The DT-100's low-profile, sculptured keyboard with 16 programmable function keys, cursor control keys and numeric pad gives you greater operator efficiency.

Functions: Full range of ANSI 3.64 and compatible with DEC, VT-100 and VT-52.

Data Transfer: Selectable rates up to 38,400 baud.

Video Size Format: 24 lines (plus two status lines) of 80 or 132 characters, upper and lower case.

Video Attributes: Normal, reverse, invisible, blink, underline and half-intensity video.

Keyboard: Low-profile, sculpted 101-key keyboard with 16 programmable function keys and numerical data pad.

Input/Output Ports: Two RS-232C communications ports.

Dimensions:
12¹/₂ × 10¹/₄ × 12¹/₂"

Power Requirements: 120VAC, 60 Hz. U.L. listed.

Radio Shack[®] COMPUTER CENTERS

A DIVISION OF TANDY CORPORATION

©Tandy Corporation, Fort Worth, Texas 76102. Tandy and Radio Shack/Registered TM Tandy Corp. DEC/Registered TM Digital Equipment Corp. UNIX/TM Bell Laboratories. XENIX/TM Microsoft Corp.

FC-226