


# e-con Systems India Pvt Ltd 7<sup>th</sup> Floor, RR Tower - IV,

7<sup>th</sup> Floor, RR Tower - IV, Super A-16 & A-17, Thiru-Vi-Ka Industrial Estate, Guindy, Chennai - 600 032. www.e-consystems.com

## See3CAM\_24CUG



**Lens Datasheet** 

**Revision 1.2 08 Mar 2021** 



## Contents

Revision History	. :
, ,	
Introduction	. 4
Diaglaimar	,
Discialmer	. 4
Description	. 4
Optical Specifications	. 4
Mechanical Dimensions	. 5
pport	F
	Introduction  Disclaimer  Description  Optical Specifications  Mechanical Dimensions



# 1 Revision History

Rev	Date	Description	Author
1.0	29-Jan-2021	Initial draft	Camera Team
1.1	27-Feb-2021	Added Changes	Camera Team
1.2	08-Mar-2021	FOV updated	Camera Team



#### 2 Introduction

See3CAM\_24CUG is a 2.3 MP Global shutter color, UVC compliant camera, USB 3.1 Gen1 SuperSpeed camera from e-con Systems, a leading Embedded Product Design Services Company which specializes in the advanced camera solutions. It is the latest member of the See3CAM family of USB 3.1 Gen1 SuperSpeed camera products.

See3CAM\_24CUG is a 2.3 MP color camera with the S-mount (also known as M12 board lens) lens holder. The S-mount is one of the most commonly used small form factor lens mounts for board cameras.

This document describes the optical specification of lens used in See3CAM\_24CUG.

#### 3 Disclaimer

e-con Systems reserves the right to edit or modify this document without any prior intimation or whatsoever.

## 4 Description

The lens used in See3CAM\_24CUG is a high resolution, 1/2.3" format, and wide-angle lens. It provides a maximum Field of View (FOV) of 128.2°.

## 5 Optical Specifications

The optical specifications of lens are listed in following table.


Description	Specification
Imager Format	1/2.3" (1/2.6" for AR0234CS)
Focal Length	3.0 mm
Aperture (F/#)	2.8
FOV	128.2°(D), 104.6°(H), 61.6°(V) (with 1/2.6" AR0234CS)
Distortion	< 35 %
Chief Ray Angle	< 16.5°
Lens Barrel Thread	M12 x 0.5

**Table 1: Optical Specifications of Lens** 



## **6 Mechanical Dimensions**

The mechanical dimensions of lens used in See3CAM\_24CUG is shown below.

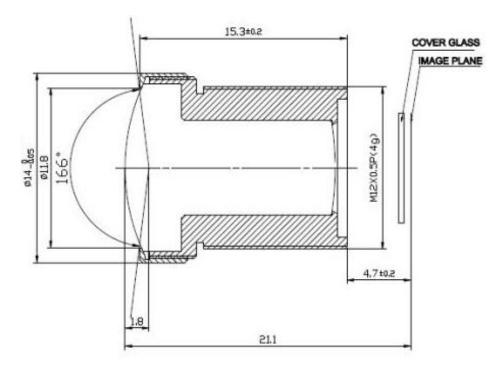

**Figure 1: Lens Mechanical Dimensions** 

Note: All dimensions are in mm.



## **Support**

#### **Contact Us**

If you need any support on See3CAM\_24CUG product, please contact us using the Live Chat option available on our website - <a href="https://www.e-consystems.com/">https://www.e-consystems.com/</a>

#### **Creating a Ticket**

If you need to create a ticket for any type of issue, please visit the ticketing page on our website - <a href="https://www.e-consystems.com/create-ticket.asp">https://www.e-consystems.com/create-ticket.asp</a>

#### **RMA**

To know about our Return Material Authorization (RMA) policy, please visit the RMA Policy page on our website - <a href="https://www.e-consystems.com/RMA-Policy.asp">https://www.e-consystems.com/RMA-Policy.asp</a>

### **General Product Warranty Terms**

To know about our General Product Warranty Terms, please visit the General Warranty Terms page on our website - https://www.e-consystems.com/warranty.asp

