

from: **sharmin** <sharmin.sales.sfc@gmail.com>
to: gapkindo.pusat@gmail.com
date: Feb 10, 2026, 8:28 AM
subject: Re: Qingdao Shun Cheong - High-Quality Machinery for the Rubber Industry.

Dear Sir/Mam,
Greetings from **Qingdao Shun Cheong Rubber Machinery Manufacturing Co., Ltd.**

With over 20 years of manufacturing expertise, we specialize in producing robust and efficient rubber machinery, including

1. **Mixing Mills,**
2. **Kneaders,**
3. **Vulcanizing Press,**
4. **Force feeding straining Extruders,**
5. **Waste Tire Recycling Lines**
6. **Rubber calender machines** and so on.

For your evaluation, please find our product catalog attached. Should your team be considering equipment upgrades or have any specific technical requirements, I would be pleased to provide further details or arrange a discussion.

Kind regards,
Sharmin Khatun
Sales Representative
WhatsApp: +86 183 4470 0139

On Fri, 24 Oct 2025 at 10:57, sharmin <sharmin.sales.sfc@gmail.com> wrote:
Dear sir/mam,

I know you're busy, so just a quick follow-up on my last email.

Could you please share your Purchasing Manager's contact details?

Our machinery has become very popular globally, and I'd hate for them to miss out. We welcome the opportunity to partner with you and discuss your needs.

Thanks,
Best regards,

Sharmin Khatun
Sales Representative
Qingdao Shun Cheong Rubber Machinery Manufacturing. Co., Ltd.
Website: <http://www.cn-rubbermachine.com>
WhatsApp: +86 183 4470 0139.

On Tue, 7 Oct 2025, 8:22 am sharmin, <sharmin.sales.sfc@gmail.com> wrote:

Dear Production/Purchase Manager Team,

I am Sharmin Khatun from Qingdao Shun Cheong Rubber Machinery. We are a leading manufacturer of robust and efficient rubber machinery.

Our core products are designed to improve production efficiency and include: Mixing Mills, Kneaders, Calenders, Vulcanizing Presses, Recycling machine and so on.

We are a trusted choice for manufacturers seeking durable and cost-effective equipment.

Are you considering any new machinery acquisitions or production line upgrades in the near future?

The attached catalog provides an overview of our solutions. I am available to discuss how we can meet your specific needs.

Best regards,

Sharmin Khatun

Sales Representative

Qingdao Shun Cheong Rubber Machinery Mfg. Co., Ltd.

Website: <http://www.cn-rubbermachine.com>



专业橡胶机械制造商
RUBBER MACHINERY MANUFACTURER

青岛顺富昌橡胶机械制造有限公司
Qingdao Shun Cheong Rubber Machinery Manufacturing Co., Ltd

青岛顺富昌橡胶机械制造有限公司

Qingdao Shun Cheong Rubber Machinery Manufacturing Co., Ltd

地址：中国·青岛·西海岸新区 Add: West Coast New District, Qingdao, China

手机：139 6397 5727 Mob: +86-13963975727

电话：0532-85185697 Tel: +86-(0)532-85185697

邮箱：info@sfcjx.com E-mail: info@sfcjx.com

网址：www.sfcjx.com Website: www.cn-rubbermachine.com

中国·青岛
QINGDAO, CHINA
2025版

公司简介

COMPANY PROFILE

青岛顺富昌橡胶机械制造有限公司位于青岛西海岸海洋高新区，是国内一家专业生产橡胶机械的国家级高新技术企业。公司荣获青岛市“专精特新”企业、国家级“高新技术企业”等荣誉称号，注册“顺富昌”商标，并已通过ISO9001:2015质量体系认证、瑞士SGS认证及欧盟CE出口认证。公司产品使用三维软件设计，不仅畅销全国各地，还远销美国、英国、俄罗斯、荷兰、泰国、马来西亚、印尼、智利、墨西哥、乌克兰、乌兹别克斯坦、法国等多个国家和地区。

我公司主要产品包含：新型下落式密炼机、炼胶机、平板硫化机、压延机、胶片冷却机、捏炼机、强制喂料过滤挤出机、新型废轮胎处理设备、再生胶设备等，并可根据客户要求设计制造各种专用橡胶机械。

自2019年以来，我公司新开发的EPDM塑胶跑道颗粒生产线、橡皮筋生产线、汽车丁基胶片生产线、隔音防震垫子生产线以及橡胶疏浚管生产线，从生产设备到产品制作工艺等交钥匙工程项目，在国内外不同客户现场使用，受到良好评价。

青岛顺富昌橡胶机械制造有限公司全体员工愿以一流的技术、质量和高效服务为国内外客户提供高效益的橡胶加工设备。

热诚欢迎国内外客户来我公司洽谈指导！

Qingdao Shun Cheong Rubber Machinery Manufacturing Co., Ltd is located in Qingdao west coast new economic district, which is a high-tech enterprise specializing in the production of rubber machinery in China. Honorary titles of Qingdao "Specialized and New" Enterprise, National "High-tech" Enterprise, etc. has been achieved, trademark "顺富昌" registered, and has passed ISO9001:2015 quality system certification, Swiss SGS certification and CE export certification. All the machines are designed with 3D software and are not only sold all over the country, but also exported to the United States, Britain, Russia, the Netherlands, Thailand, Malaysia, Indonesia, Chile, Mexico, Ukraine, Uzbekistan, France and many other countries and regions.

The main products of our company including new banbury mixer, rubber mixing mill, vulcanizing press, rubber calender, batch of cooler, rubber kneader, forced feeding straining extruder, new waste tire recycling line, reclaimed rubber equipment etc. , and can design and manufacture various special rubber machinery according to customer requirements.

Since 2019, our company's newly developed EPDM runway granules production line, rubber band production line, automotive butyl sheet production line, sound insulation and shock cushion production line and rubber dredging pipe production line, turnkey projects ranging from production equipment to product manufacturing technology have been used on-site by different customers at home and abroad, and have received good reviews.

All employees of Qingdao Shun Cheong Rubber Machinery Manufacturing Co., Ltd are willing to provide high-efficiency rubber processing equipment for all customers with first-class technology, quality and efficient service.

Sincerely welcome you to visit our company for further more discussions.

SFC



国家专利 NATIONAL PATENT



荣誉证书 CERTIFICATE OF HONOR



开放式炼胶机 RUBBER MIXING MILL



- ▲ 全自动稀油润滑；迷宫式密封系统，杜绝漏油。
- ▲ 机器操作柜设在工人就近操作区域内。
- ▲ 出厂前整机内电线安装完毕。
- ▲ 整体底座无需打基础。
- ▲ Automatic thin oil lubrication; labyrinth seal system to eliminate oil spills.
- ▲ Operation panel is located in the nearby operation area of workers.
- ▲ All wires are well connected before leaving factory.
- ▲ Designed with whole base, no need to lay the foundation.


型号 Model	辊筒直径×长度 Roller (D × L) (mm)	前辊线速度 Front Roller Linear Speed (m/min)	辊筒速比 Speed Ratio	电动机功率 Motor Power (KW)
XK-160	φ 160 × 320	8.95	1:1.37	5.5
XK-230	φ 230 × 600	10.21	1:1.19	15
XK-250	φ 250 × 620	14.1	1:1.17	18.5
XK-300	φ 300 × 750	15.1	1:1.25	22
XK-360	φ 360 × 900	16.25	1:1.25	30
XK-400	φ 400 × 1000	18.65	1:1.27	37
XK-450	φ 450 × 1200	24.26	1:1.27	55
XK-560	φ 560 × φ 510 × 1530	27.72	1:1.2	90
XK-5500	φ 550 × 1500	27.94	1:1.22	110
XK-610	φ 610 × 2000	28.42	1:1.17	160
XK-660	φ 660 × 2130	28.6	1:1.24	240
XK-710	φ 710 × 2200	30	1:1.08	280

捏炼机

RUBBER KNEADER







- ▲ 捏炼室采用夹套结构，内壁面镀硬铬。
- ▲ 转子采用二棱剪切式，棱边及端面经耐磨合金，经打磨、磨硬后抛光处理，耐磨且防腐。
- ▲ 电控系统采用PLC控制，具有完善的控制系统和可靠的检测报警功能。
- ▲ Mixing chamber adopts Jacket structure. It is plated with hard chrome on its internal walls.
- ▲ The rotors are designed of two edge shearing style. The top edges and the side faces of blades are welded with hard alloy and grounded, then plated with hard chrome and polished anti-wear and anti-corrosion.
- ▲ Electrical control system adopts PLC which has perfect control system with reliable inspection and alarming functions.

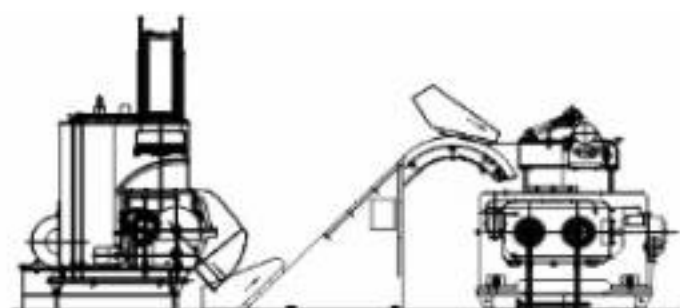



项目 Item		KJ2N-3	KJ2N-20	KJ2N-35	KJ2N-55	KJ2N-75	KJ2N-110	KJ2N-150	KJ2N-200
空腔容积 Cavity Volume	L	3	20	35	55	75	110	150	200
驱动电机功率 Driving Motor Power	KW	5.5	37	55	75	110	185	220	280
倾斜角度 Tilting Angle	°	140	140	140	140	140	140	135	135
转子转速(转/分) Rotor Rotating Speed (RPM)	min	3204.5	3207	3024.5	3024.5	3024.5	3024.5	3024.5	3024.5
压缩空气工作压力 Compressed Air Pressure	MPa	0.5-0.8	0.5-0.8	0.5-0.8	0.5-0.8	0.5-0.8	0.5-0.8	0.5-0.8	0.5-0.8
压缩空气流量 Compressed Air Flow Rate	m ³ /min	≥0.3	≥0.7	≥0.9	≥1.0	≥1.0	≥1.5	≥2.0	≥4.0
冷却水压力 Cooling Water Pressure	MPa	0.2-0.4	0.3-0.4	0.3-0.4	0.3-0.4	0.3-0.4	0.3-0.4	0.3-0.4	0.3-0.4
加热蒸汽压力 Steam Heating Pressure	MPa	0.5-0.8	0.5-0.8	0.5-0.8	0.5-0.8	0.5-0.8	0.5-0.8	0.5-0.8	0.5-0.8
外形尺寸 Dimensions	L	mm	2000	2530	3200	3230	3325	4075	4250
	W	mm	900	1520	1900	1827	2615	2712	3400
	H	mm	2200	2550	2950	2858	3105	3580	4200

Auxiliary system on the mixer

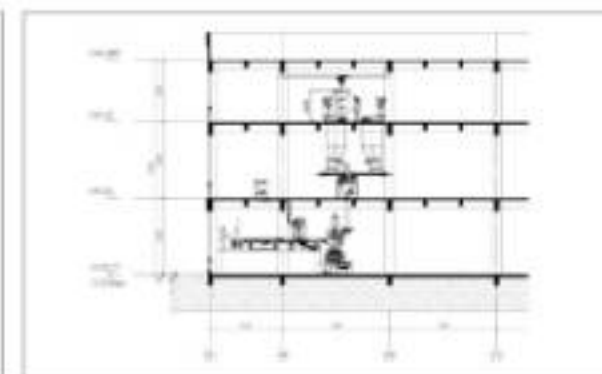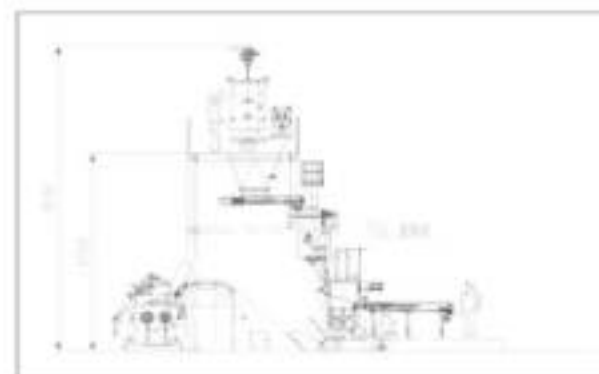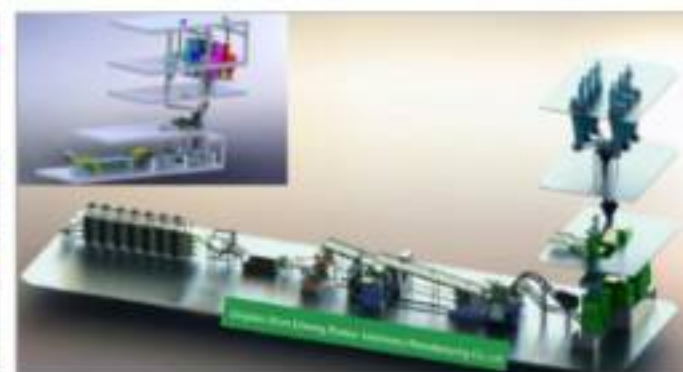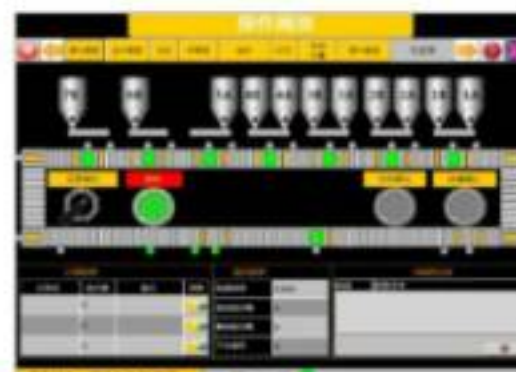

胶片冷却机

BATCH OFF COOLER

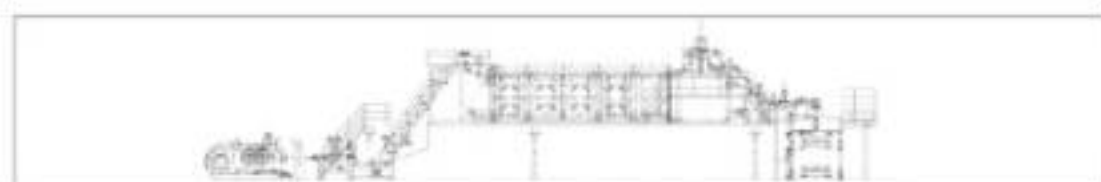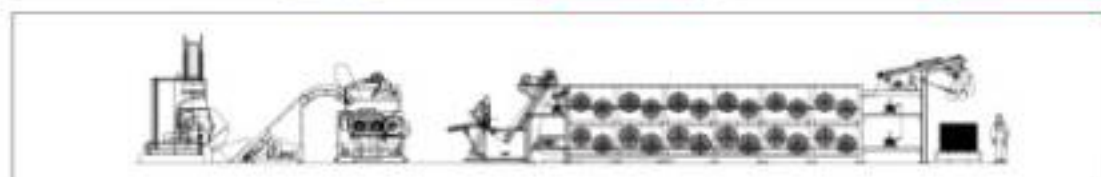

普通/2RT/3RT平板硫化机

ORDINARY/2RT/3RT PLATE VULCANIZING MACHINE



▲ 可根据用户要求设计各种非标平板硫化机

▲ We can design various kinds of non-standard vulcanizing presses according to your requirements.

型号 Model	公称总压力 Total Pressure (MN)	熟化厚度 Daylight (mm)	工作层数 Working Layer	活塞行程 Piston Stroke (mm)	外形尺寸(L×W×H) Overall Dimension (L×W×H) (mm)
XLB-350×350×2	0.25	125	2	250	1200×880×1200
XLB-400×400×2	0.50	125	2	250	1400×900×1400
XLB-600×600×2	1.00	125	2	250	1800×920×1680
XLB-750×850×4	1.60	125	4	500	1730×930×2480
XLB-900×900×2	2.50	300	2	400	2345×960×1385
XLB-1200×1200×1	3.15	300	1	500	2800×1300×2300
XLB-1300×2000×1	5.50	400	1	400	3000×1880×2500
XLB-1500×1500×1	8.00	800	1	800	2200×2200×4300
XLB-1500×2500×1	15.00	400	1	400	3000×2600×3300
XLB-2000×2000×1	20.00	400	1	400	3800×3000×3300

橡胶地砖硫化机 RUBBER TILES VULCANIZING PRESS



- ▲ Each layer equipped with 2 sets of moulds.
- ▲ Push-pull device is fixed on the press post and do not affect the using of the vulcanizing press.

型号 Model	XLB-D550x550	XLB-D1100x1100
公称合模力 Total Pressure(Ton)	50	120
加热板尺寸 Heating Plate Size(mm)	550x550x45	1100x1100x50
层数 Layer No.	4	1 or 2
电机功率 Motor Power(KW)	3.0	4



实心胎硫化机 SOLID TIRE VULCANIZATION MACHINE



胶粉轮硫化机 RUBBER POWDER WHEEL VULCANIZATION MACHINE



空气弹簧硫化机

AIR SPRING VULCANIZING MACHINE



雨刷条硫化机

WIPER BLADE VULCANIZING MACHINE



挡边带硫化机

SIDEWALL BELT VULCANIZING PRESS

- ▲ 该生产线是由裙边硫化机、隔板硫化机、液压拉伸辊和辅助从动辊等组成
- ▲ This production line is composed of skirt side vulcanizing press, cleat vulcanizing press, hydraulic stretching roll and auxiliary driven rolls.



EPDM复合垫片生产线

EPDM COMPOSITE WASHER PRODUCTION LINE



胎面硫化机

TIRE TREAD VULCANIZING PRESS



- ▲ 该机为翻新轮胎面专用硫化设备，单位面积压力大，自动化程度高。
- ▲ The press is dedicated in vulcanizing tire treads, with large unit pressure and high level of automation.

型号/技术参数 Model	XLE-3000x1000x5	XLE-3600x450x5	XLE-Q4100x450x5	XLE-S1100x220x5	XLE-Y6000x600x3
公称合模力 MN Nominal Clamping Force (MN)	12.00	6.50	8.50	3.15	10.08
热板规格 Hot Plate Size(mm)	3000x1000	3600x450	4100x450	5100x220	6000x600
热板工作层数 No. of Working Layers	5	5	5	5	3

- ▲ 备注：该机具有自动快速上升、慢速合模、自动排气、自动补压、硫化计时、自动恒温、到时报警、自动快速开模、自动推拉模具等功能。
- ▲ Note: This machine is equipped with automatic rapid rise, slow mold closing, automatic exhaust, automatic pressure filling, vulcanization timing, automatic constant temperature, alarm upon arrival, automatic rapid mold opening, and automatic push-pull mold and other functions.

双联硫化机

DUPLEX CURING PRESS



- ▲ 两台硫化机主机可以同时运行也可以单独运行
- ▲ Two host machines can run simultaneously or separately

型号 Model	XLB-600x600	XLB-650x650
公称合模力 Total Pressure(Ton)	250	300
热板尺寸 Plate Size(mm)	600x600x60	650x650x60
热板间距 Daylight(mm)	300	350-500
柱塞行程 Piston Stroke(mm)	300	350

EVA发泡硫化机

EVA FOAMING PRESS



- ▲ 出厂前通过24小时试压、保压，以检测油缸柱塞承受能力，保证不漏油、不渗油。
- ▲ Before leaving the factory, this press has passed 24 hour pressure test and pressure maintaining to detect the cylinder piston bearing capacity to ensure no oil leakage.

型号 Model	XLB-1200x1200x4	XLB-1400x1000x5	XLB-1500x1000x5
总压力 Total Pressure (MN)	5.00	8.00	10.00
热板尺寸 Plate Size(mm)	1200x1200	1400x1000	1500x1000
热板间距 Daylight (mm)	100	150	100
柱塞行程 Piston Stroke(mm)	800	900	800

下压式硫化机 DOWNWARD PRESSURE VULCANIZING MACHINE



发热板成型机 HEATING SHEET FORMING MACHINE



鄂式硫化机 C TYPE VULCANIZING PRESS



- ▲ 双鄂式硫化机和单鄂式硫化机，可根据客户要求设计制作。
- ▲ Our company can design Double-C and C type vulcanizing press according to the requirements.

双向移动模具式硫化机

TWO-WAY SLIDING MOLD CURING PRESS



▲ 前后推拉模具装置是采用液压推拉或机械推拉两种方式

▲ Front and rear push-pull device using hydraulic type or mechanical type two options.



输送带生产线

CONVEYOR BELT PRODUCTION LINE



输送带带坯成型机

GREEN RUBBER CONVEYOR BELT BUILDING MACHINE



废轮胎处理生产线 WASTE TIRE RECYCLING LINE



切圈机 Ring Cutter
将废轮胎从底部下。 Cut down the tire beads.



切条机 Strip Cutter
将废轮胎切成宽度为40mm的橡胶条。
Cut the waste tires (getting rid of beads) into rubber strips of 40mm width.



切块机 Block Cutter
将宽度为40mm的橡胶条切成40mmx40mm的橡胶块。
Cut 40mm width rubber strips into 40mm x 40mm rubber blocks.



压团机 Press Lump Machine
将橡胶条和钢丝压成团。
Press the rubber and steel wires into lumps.



废轮胎粉碎机 Waste Tire Shredding Machine



切条切块一体机 Strip and Block Combined Cutter



拔丝机 Hook Debeader
将废轮胎上的钢丝直接拔出。
Pull out the wires directly from the tire beads.



轮胎切割机 Whole Tire Cutter
将废轮胎切成几个小块。
Cut the whole waste tires into small parts.



整胎破碎机 Whole Tire Shredder
将废轮胎或橡胶块破碎成50x50mm的橡胶块。
Shredding the waste tires or rubber blocks into 50x50mm.



破胶机

RUBBER CRACKER MILL

- ▲ 辊筒有合金冷硬铸铁和铸钢材质两种选择。
- ▲ Rolls have chilled alloy cast iron and cast steel two kinds optional.



- ▲ 该机器适合破碎各种废旧轮胎、橡胶输送带等废旧橡胶制品。
- ▲ 主要型号有: XKP-400 \ XKP-450 \ XKP-560 \ XKP-610 \ XKP-710
- ▲ It is used to crush various waste tires, rubber conveyor belts and other waste rubber products.
- ▲ Main models: XKP-400 \ XKP-450 \ XKP-560 \ XKP-610 \ XKP-710

产品型号 Model	XKP-400	XKP-450	XKP-560	XKP-610	XKP-710
前辊工作直径 Working Dia. of Front Roller (mm)	400	450	510	560	610
后辊工作直径 Working Dia. of Rear Roller (mm)	400	450	560	610	710
辊筒工作长度 Roller Working Length (mm)	600	650	800	800/1000	1100
电机功率 Motor Power (KW)	45	55	132	185	250

辅机

RUBBER CRACKER MILL AUXILIARY EQUIPMENT



- ▲ 破胶机辅机主要有大振动筛、小振动筛、大输送机、小输送机、磁选装置、环保除尘(适用)。
- ▲ It includes: Big Belt Conveyor, Big Vibrating Screen, Small Belt Conveyor, Small Vibrating Screen, Big Magnetic Separator, Small Magnetic Separator, Environmental Protection Dust Removing Equipment (optional).

纤维分离器

FIBER SEPARATOR

- ▲ 将胶粉中混杂的细绒毛纤维分离出来。
- ▲ Separate the fine fibers from the rubber powder.



精细胶粉机

FINE RUBBER POWDER PULVERIZER



技术参数 Technical Parameters	XFJ-280	XFJ-320
刀盘直径 Knife Disc Diameter (mm)	280	320
主机功率 Main Motor Power (KW)	22	37

再生胶生产线

RECLAIMED RUBBER PRODUCTION LINE



	型号 Model	规格尺寸 (mm) Roller Size (mm)	配置 Configuration
再生胶搅拌机 Reclaimed Rubber Kneader	KKJ-480	480x510x800	ZSY系列硬齿面减速机 Roller bearing lubrication
	KKJ-480I	480x510x1200	
再生胶碾磨机 Rubber Refining Mill	KKJ-480II	480x510x1000	ZSY series hard tooth gear reducer Roller bearing lubrication
	KKJ-480III	480x510x915	

切胶机

RUBBER BALE CUTTER



- ▲ 前后设有安全防护罩，操作面有送料通道辅助操作。
- ▲ Front and rear both have safety protective cover, operation side has feeding raceway to assist operation.

产品型号 Model	XQL-50	XQL-60	XQL-125	XQL-300	XQL-1000
切割宽度 Cutting Width (mm)	550	650	750	1000	1250
额定切割力 Rated Cutting Force (KN)	50	60	125	300	1000
刀片行程 Cutting Stroke (mm)	600	680	780	1100	1100
切割行程时间 Cutting Time (S)	7-11	14-16	14-18	16-18	14-18

提升机

BUCKET ELEVATOR

- ▲ 用在捏炼机和炼胶机之间，运送胶料，减轻工人劳动强度。
- ▲ It is installed between the rubber kneader and rubber mixing mill and used for conveying the rubber materials which greatly reduce labor intensity.



销钉式冷喂料橡胶挤出机 PIN BARREL COLD FEED RUBBER EXTRUDER



项目 Item	XJD-90	XJD-120	XJD-150	XJD-200	XJD-250
螺杆直径 Screw Diameter(mm)	90	120	150	200	250
螺杆长径比 L/D Ratio	12	12-14	14-16	12-14-16	12-14-16
螺杆最大转速 Max. Screw Rotational Speed(r/min)	60	50	43	35	26-30
喂料口 Feeding Port(mm)	120x90	164x130	220x130	260x190	310x220
销钉行数 Row QTY.	8	8-10	10	10-12	10-12
每行销钉数 Each Row Pin QTY.	6	6	8	10	12
功率 Motor Power(KW)	75-90	90-110	200-220	315-355	400-500
热水循环区段 Zone of Hot Water Circulation	4	4	4	4	4
热水循环加热功率 kW Total Heating Power of Hot Water Circulation	48	48	48	48-64	48-64
生产能力 Capacity(KG/h) (温控系统) (Temperature Control System)	250-360	600-800	1000-1500	1600-2600	3000-3500
外形尺寸 (mm) Overall Dimensions	2800 1400 1500	3450 1320 1500	4000 1810 1820	5500 2100 1850	6800 2400 1850
重量 Gross Weight(T)	~4.5	~6	~7.25	~12	~17

二辊压延机 TWO ROLLER CALENDER



结构形式有 I、II 型两种供选择 Structure I, II type for your choice

型号 Model	XY-21 320	XY-21 630	XY-21 1120	XY-21 1500	XY-21 1830	XY-21 1730
辊筒直径 Roller Diameter (mm)	160	230	360	450	550	610
工作长度 Roller Working Length (mm)	320	630	1120	1500	1830	1730
辊筒速比 Speed Ratio	1:1	1:1	1:1	1:1	1:1.08	1:1
辊筒线速度 Roller Linear Speed (r/min)	7.70	14.8	3-20.2	2.5-24.8	2-18.7	4-36
制品最小厚度 Min. Thickness of Products (mm)	0.2	0.2	0.2	0.2	0.2	0.2
制品宽度 Products Width (mm)	250	580	920	1250	1600	1500
电机功率 Main Motor Power (KW)	5.5	15	37	45	75	90

三辊压延机 THREE ROLLER CALENDER




结构形式有 L、I 型两种供选择

Structure: L, I type for your choice

型号 Model	XY-830	XY-900	XY-1120	XY-1400	XY-1500	XY-1730	XY-2130	XY-2430
辊筒直径 x 长度 Roller Diameter x Length (mm)	230 x 830	360 x 900	360 x 1120	400 x 1400	450 x 1500	610 x 1730	710 x 2130	810 x 2430
速度比 Speed Ratio	1:1:1 1:1.42:1	1:1:1 0.733:1:1 0.733:1:0.733	1:1:1	1:1:1 1:1.383:1.383 1:1.383:1	1:1:1 1:1.3:1	1:1:1 1:1.4:1	1:1:1	1:1:1 1:1.5:1
中间辊速度 Middle Roller Linear Speed (RPM)	0.8-8	3-21.08	1.5-15	3-26.38	2.62-28.2	8.4-84	8-80	2-20
制品最小厚度 Min Thickness of Products (mm)	0.2	0.2	0.2	0.2	0.2	0.15	0.15	0.15
制品宽度 Product Width (mm)	100-500	700	820	1200	1300	1530	1900	2150
电机功率 Motor Power (KW)	7.5	45	45	55	75	132	180	220



四辊压延机 FOUR ROLLER CALENDER

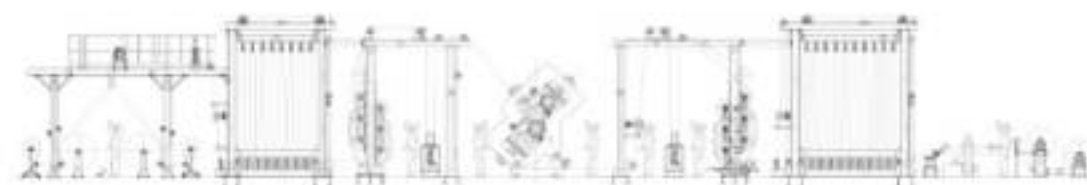

1. 开卷装置 2. 剥头机 3. 前导引轮 4. 前导引轮 5. 中间导引轮 6. 立式中间导引轮 7. 前导引轮 8. 强力压延中心装置 9. 后导引轮 10. 后导引轮 11. 后导引轮 12. 立式中间导引轮 13. 后导引轮 14. 后导引轮 15. 后导引轮 16. 后导引轮


型号 Model	XY-4 (830)	XY-4 (1120)	XY-4 (1400)	XY-4 (1500)	XY-4 (1730)	XY-4 (2130)	XY-4 (2430)
辊筒尺寸 Roller Size (mm)	230x830	360x1120	400x1400	450x1500	610x1730	710x2130	810x2430
速度比 Speed Ratio	1:1:1:1	0.73:1:1:0.73	1:1.383:1.383:1	1:1.5:1:1.5:1	1:1.4:1.4:1 1:1.4:1.4:1.4	1:1.48:1.48:1 1:1.48:1.48:1.4	1:1.5:1.5:1
中间辊速度 Middle Roller Speed (RPM)	2.1-21	3-30.1	3-26.3	2.5-25	8-50	8-50	2-20
制品最小厚度 Min Thickness of Product (mm)	0.2	0.2	0.2	0.2	0.15	0.15	0.15
制品宽度 Products Width (mm)	100-500	500-920	1200	1250	1500	1900	2150
电机功率 Main Motor Power (KW)	22	55	75	110	160	185	280

橡胶制品挤出生产线
RUBBER PROFILES EXTRUSION LINE

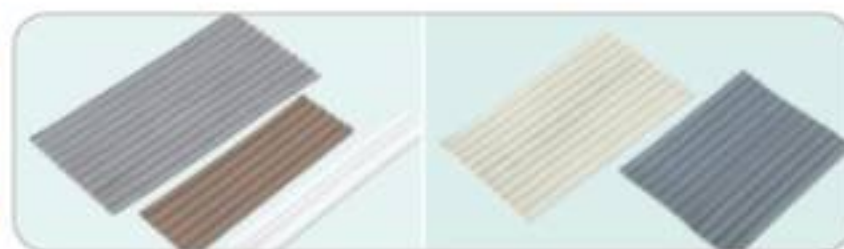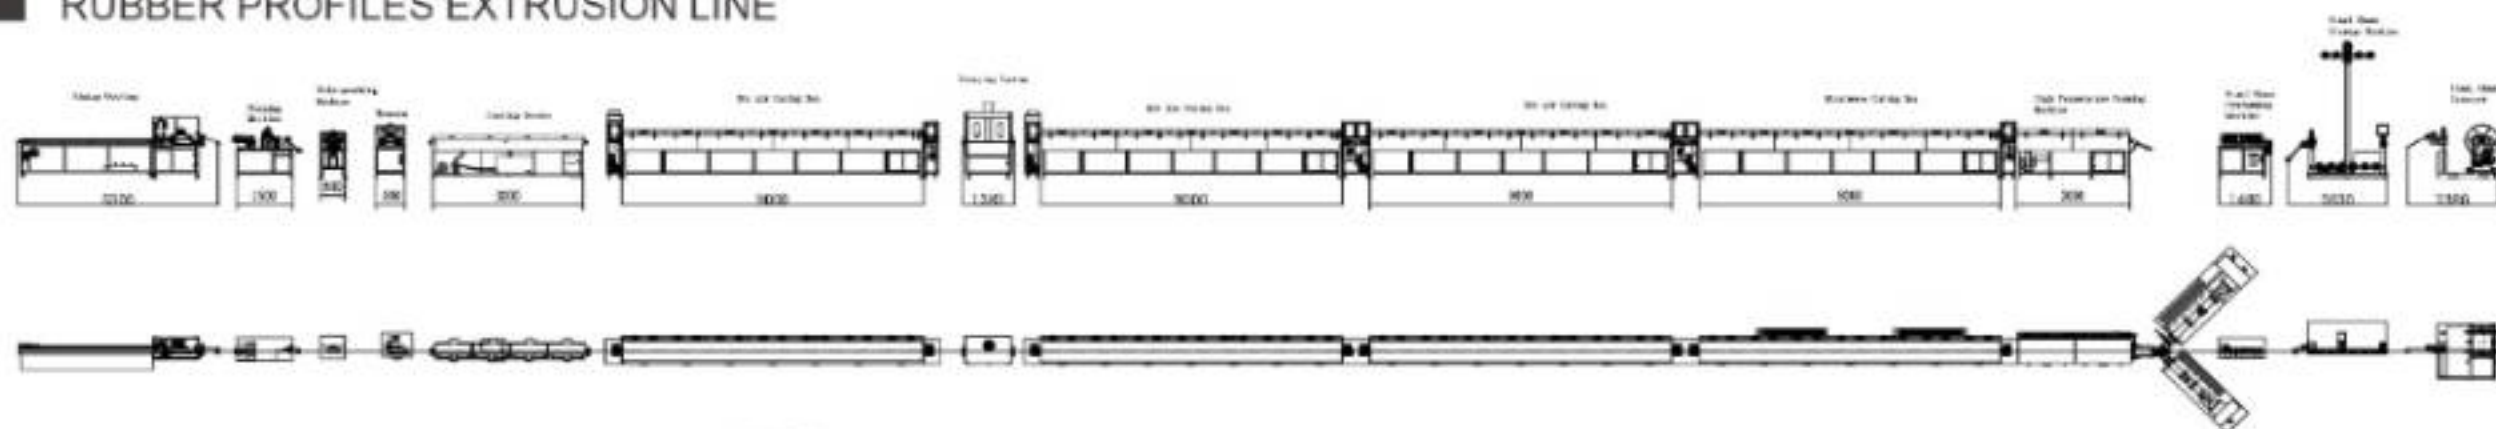

强制喂料滤胶挤出机

FORCED FEED RUBBER STRAINER EXTRUDER

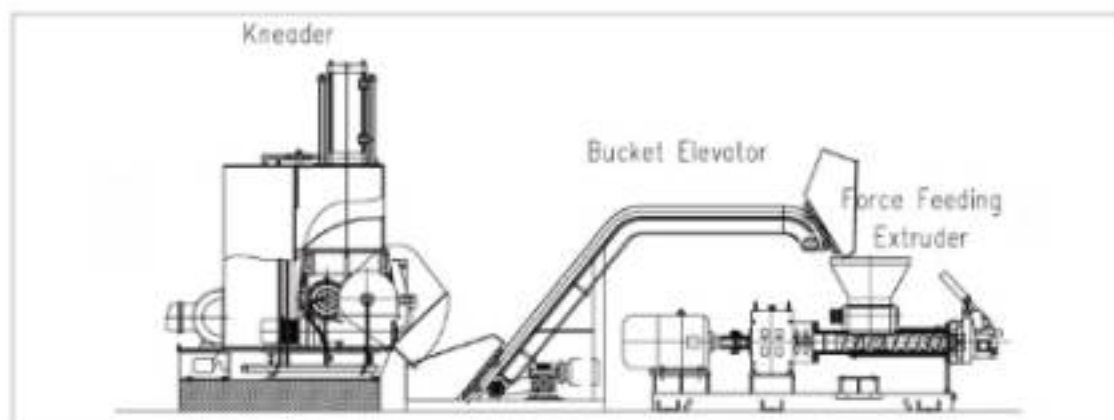

混合喂料机省掉拌胶工序

This strainer saves the mixing mill mixing process

型号 Model	XJL-150	XJL-200	XJL-250
螺杆直径 Diameter of Screw(mm)	150	200	250
长径比 L/D	5.14:1	45:1	4:1
螺杆转速 Screw Rotational Speed (RPM)	53	45	40
电动机功率 Motor Power(KW)	37/45	55/75	110

EPDM颗粒生产线

EPDM GRANULES PRODUCTION LINE



■ 橡皮筋生产线 NATURAL RUBBER BAND EXTRUSION LINE



■ 丁基胶塞生产线 BUTYL RUBBER STOPPER PRODUCTION LINE



■ BUTYL RUBBER SHEET PRODUCTION LINE



■ 碾米机胶辊生产设备 RICE MILL RUBBER ROLLER PRODUCTION MACHINES





垫布整理机
Cloth finishing machine



接头硫化机
Conveyor Belt Splicing Press



分条机
Slitting Machine



拆边机
Edge Trimming Machine



橡胶片冷却裁断装置
Rubber Sheet Cooling & Cutting Device



橡胶打包机
Rubber Packer Press

◆ 产品质量思想:

放松了质量就是放弃了市场
放松了质量就是放弃了竞争
放松了质量就是放弃了生存

◆ Product Quality Ideology:

Relaxed quality is to give up market.
Relaxed quality is to give up competition.
Relaxed quality is to give up existence.

◆ 服务质量标准:

200%服务

◆ Service Quality Criteria

200% Service

◆ 市场经济原则:

市场是企业的最高领导
市场是检验企业一切工作的标准
市场是检验企业的最好天平

◆ Market Economy Principle:

Market is the top leadership of the company.
Market is the criterion to test all the work of the company.
Market is the best balance to inspect the company.