RAVYO AUTO TECH PVT. LTD. WHEELS . GEARBOX . BELTS. TEL. 7020848508, 7020969006

Wheel And Hub




EMAIL: ravyo_at@outlook.com contact us: 7020969006,7020848508 TEL. 7020848508, 7020969006

Wheel And Hub

EMAIL: ravyo_at@outlook.com

contact us: 7020969006,7020848508

WHEELS

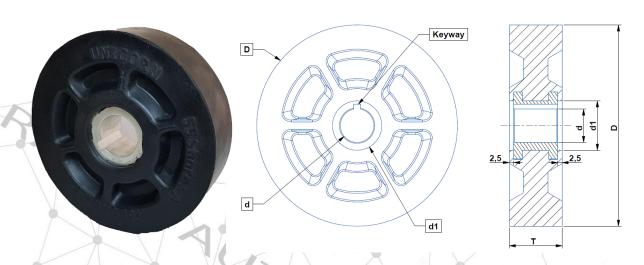

Wheels:

Wheel body manufactured with high quality rubber and aluminum core to sustain heavy impact.


Firmly molded, elastic, quite, abrasion resistant, optimum rolling resistance, Heavy loading capacity, very suitable for electrically powered forklift trucks, Heavy duty robots etc.

Sr. No.	Product	D	Ť	d	d1	Keyway	Weight	Hardness	
	No.	mm	mm	mm	mm	mm	Grams	Shore A	
= - B		(+0,-1)	(± 0.5)	(+0,- 0.5)		/	7	± 5	
		7		\bigvee					
1	UW01	76	25	19.1	28	4x2	122	65	
2	UW02	90	25	19.1	28	4x2	172	65	
3	UW03	102	30	19.1	28	4x2	241	65	
4	UW04	114	30	19.1	28	4x2	310	65	
5	UW05	127	30	30.1	42	6x3	369	65	
6	UW06	140	30	30.1	42	6x3	453	65	
7	UW07	127	50	30.1	42	6x3	641	65	
8	UW08	152	50	30.1	42	6x3	849	65	
9	UW09	178	50	30.1	42	6x3	1099	65	
10	UW10	204	50	30.1	42	6x3	1468	65	

• Custom wheel design available on bulk requirement.

Wheel And Hub

HUB

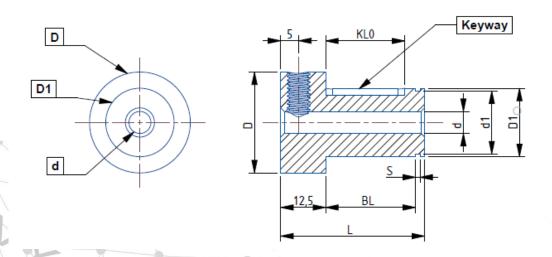

HUB:

Hubs body is made with premium quality Aluminum 6061 T6.

Precisely manufactured according to customers needs and standard motor shaft.

Variable shaft diameter hub can be manufactured on customers demand with prior notice.

Sr. No.	Product No.	D	L	D1	d	d1	BL	S	Keyway KL	
		mm	mm /	mm	mm	mm	mm	mm	C/s	Length
		(+0,-1)	(± /	(+0,-	(+0,-	(+0,-0.1)	(+0,-	(+0.1,-		(± 0.1)
			0.1)	0.05)	0.1)		0.1)	0)		
			-	9						
1	HB01	28	35	19	6.1	17.5	20	1.2	4x2	18
2	HB02	28	40	19	6.1	17.5	25	1.2	4x2	22
3	HB03	42	40	30	6.1	27.9	25	1.5	4x2	22
4	HB04	42	60	30	6.1	27.9	45	1.5	4x2	42

Kindly Note:

- 1. **d1** Will be modify as per requirement.
- 2. Standard material Used for above Bush is Aluminium
- 3. Different material of Hub will be provided on minimum order over 10pcs

EMAIL: ravyo_at@outlook.com contact us: 7020969006,7020848508