

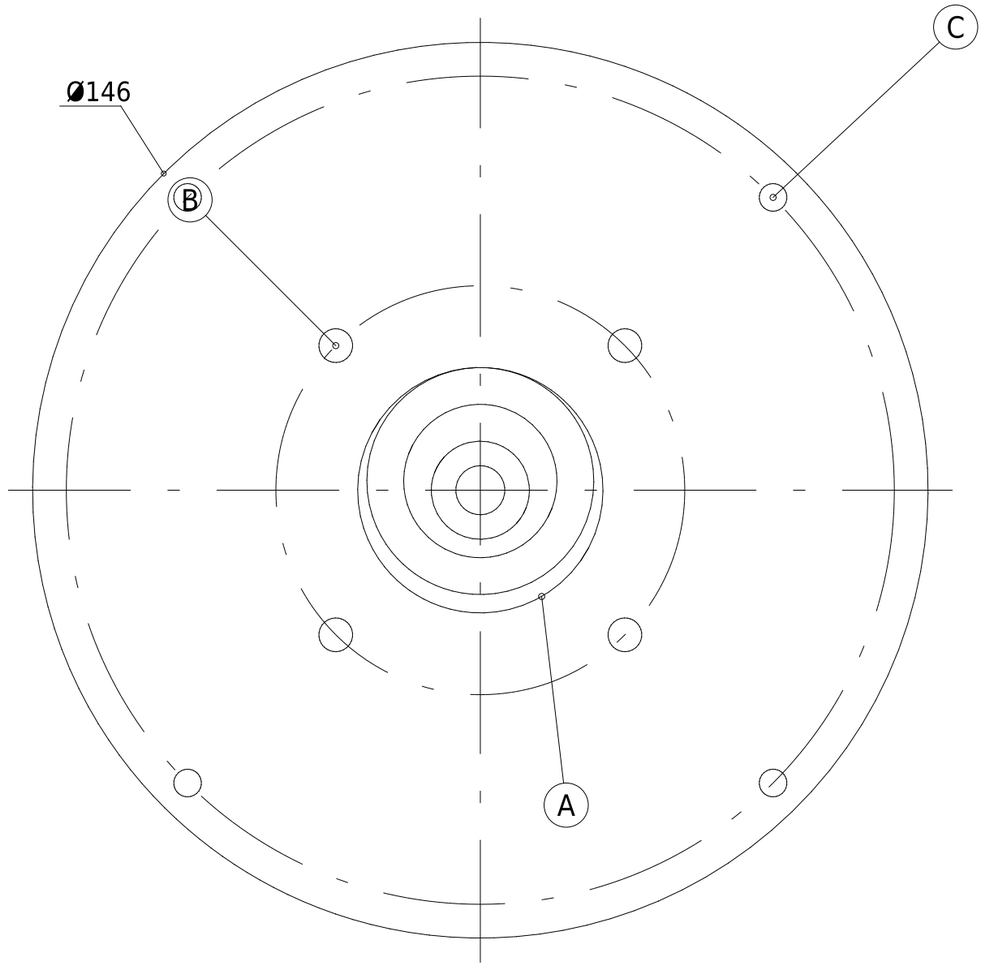


VIEW C (1:1)
(MOTOR SIDE, ROTATED 90°)

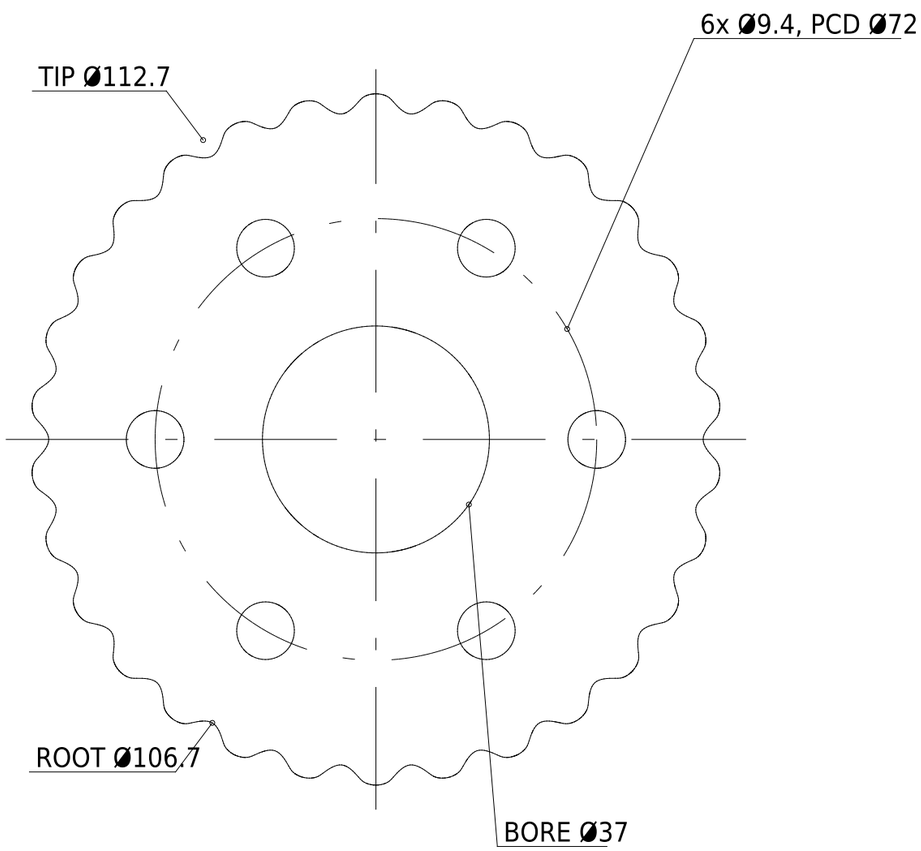



SIDE (SIMPLIFIED)

DISC (ITEM 5) (1:1)

DISC DATA	VALUE
Lobes (N-1)	30
Ring pins x Ø / circle	31 x Ø6 / Ø116
Eccentricity e	1.5
Thickness	10
Disc B	A rotated 6° about the axis, offset -e
Reduction	30:1

Tip, root, bore and hole sizes measured on the model; pin ring and e from the build.

HOLE SCHEDULE

TAG	QTY	FEATURE	SIZE / PATTERN	USE
A	1	Bore	Ø40	motor pilot / shaft
B	4	Hole Ø5.5 THRU	NEMA 23: 47.14 SQ	motor mounting
C	4	Hole Ø4.5 THRU	PCD Ø135	mounting to arm plate

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:	FINISH:		DEBURR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING	REVISION
						REV A
	NAME	SIGNATURE	DATE		TITLE:	
DRAWN	Claude		01/11/26		MODULE M DETAILS	
CHK'D						
APPV'D						
MFG						
Q.A				MATERIAL:	DWG NO.	A3
					ARM6-M	
				WEIGHT:	SCALE:1:1	SHEET 2 OF 2