

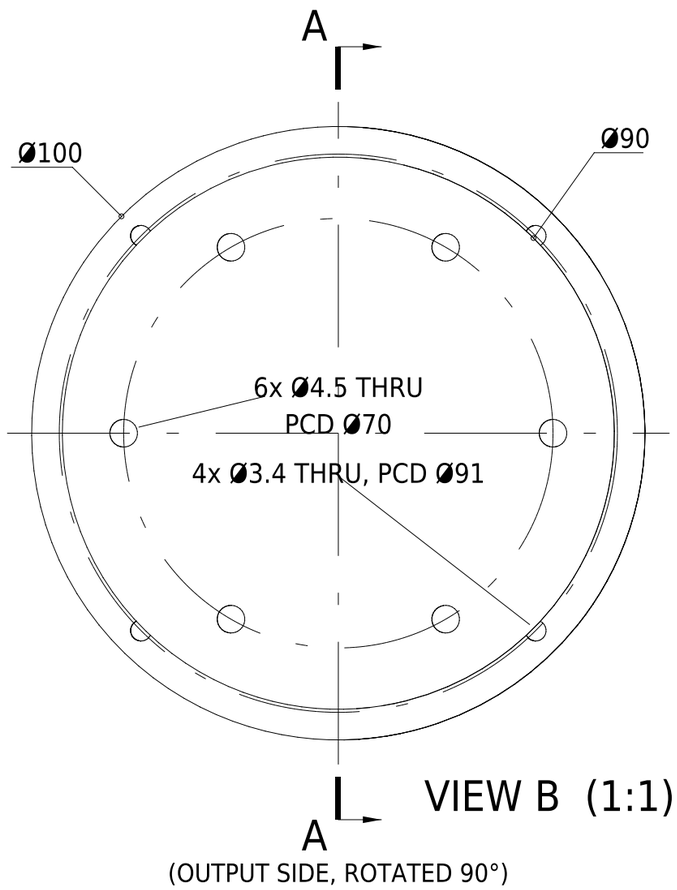


VIEW B (1:1)

(OUTPUT SIDE, ROTATED 90°)

SECTION A-A (1:1)

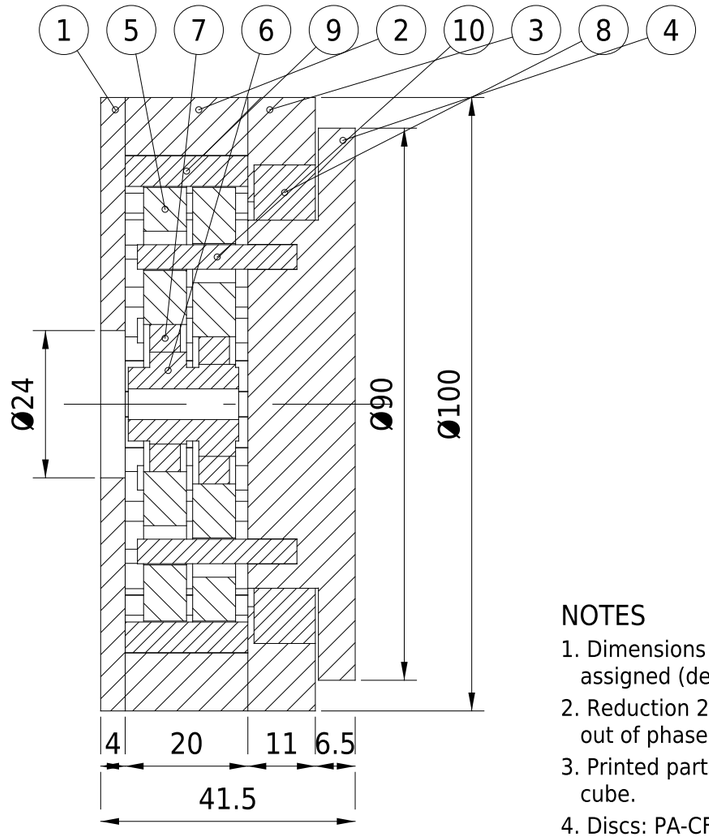

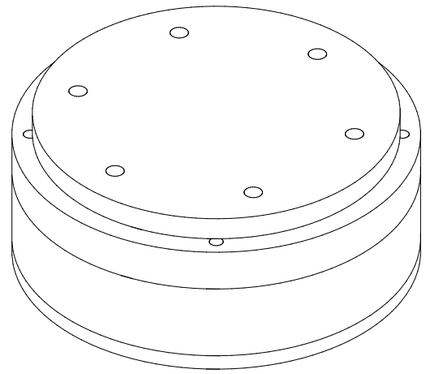

ISOMETRIC (1:1.5)

NOTES

1. Dimensions in mm, nominal as modelled. No tolerances assigned (design study).
2. Reduction 25:1 (26 ring pins, 25 disc lobes). Discs 180° out of phase.
3. Printed parts: largest part Ø100 x 20 mm, inside the 150 mm cube.
4. Discs: PA-CF or aluminium.
5. Hatch angle and density differ by part group.
6. Retaining rings, shaft keys and fits are not modelled.

ITEM	QTY	DESCRIPTION	SIZE / REF	MATERIAL
1	1	Motor plate	S_PlacaMotor	printed
2	1	Pin ring (housing)	S_AnelPinos	printed
3	1	Cover	S_Tampa	printed
4	1	Output flange	S_FlangeSaida	printed
5	2	Cycloidal disc	S_DiscoA, DiscoA (2)	PA-CF or aluminium
6	1	Eccentric shaft	S_Excentrico	steel (assumed)
7	2	Ball bearing 61802	15 x 24 x 5	catalogue
8	1	Ball bearing 61812	60 x 78 x 10	catalogue
9	26	Ring pin, dowel	5 x 20	steel (assumed)
10	6	Output pin, dowel	4 x 26	steel (assumed)

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:		FINISH:		DEBURR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING	REVISION
							REV A
	NAME	SIGNATURE	DATE			TITLE:	
DRAWN	Claude		01/11/26			MODULE S ASSEMBLY	
CHK'D							
APPV'D							
MFG							
Q.A				MATERIAL:		DWG NO.	A3
						ARM6-S	
				WEIGHT:		SCALE:1:1	SHEET 1 OF 2