

Vauxhall Ampera

Owner's Manual



Contents

Introduction	2
In brief	6
Keys, doors and windows	20
Seats, restraints	34
Storage	52
Instruments and controls	59
Lighting	88
Climate control	94
Driving and operating	103
Vehicle care	137
Service and maintenance	174
Technical data	177
Customer information	185
Index	188

Introduction

Fuel	Designation			
Engine oil	Grade			
	Viscosity			
Tyre pressure	Tyre size		Front	Rear
	Summer tyres			
	Winter tyres			
Weights	Gross vehicle weight rating			
	- Kerb weight, basic model			
	= Loading			

Vehicle specific data

Please enter your vehicle's data on the previous page to keep it easily accessible. This information is available in the sections "Service and maintenance" and "Technical data" as well as on the identification plate.

Introduction

Your vehicle is a designed combination of advanced technology, safety, environmental friendliness and economy.

The vehicle has two operation modes: Electric and extended range. In both modes, the vehicle is propelled by its electric drive unit. Thus, carbon dioxide emissions are reduced considerably without losing mobility and dynamics.

This Owner's Manual provides you with all the necessary information to enable you to drive your vehicle safely and efficiently.

Just well trained technicians who are aware of the manufacturer's instructions, are allowed to repair and/or to work with high voltage components.

Make sure your passengers are aware of the possible risk of accident and injury which may result from improper use of the vehicle.

You must always comply with the specific laws and regulations of the country that you are in. These laws may differ from the information in this Owner's Manual.

When this Owner's Manual refers to a workshop visit, we recommend your Vauxhall Authorised Repairer.

All Vauxhall Authorised Repairers provide first-class service at reasonable prices. Experienced mechanics trained by Vauxhall work according to specific Vauxhall instructions.

The customer literature pack should always be kept ready to hand in the vehicle.

Using this manual

- This manual describes all options and features available for this model. **Certain descriptions, including those for display and menu functions, may not apply to your vehicle due to model variant, country specifications, special equipment or accessories.**
- The "In brief" section will give you an initial overview.
- The table of contents at the beginning of this manual and within each section shows where the information is located.
- The index will enable you to search for specific information.
- This Owner's Manual depicts left-hand drive vehicles. Operation is similar for right-hand drive vehicles.
- The Owner's Manual uses the factory engine designations. The corresponding sales designations can be found in the section "Technical data".

- Directional data, e.g. left or right, or front or back, always relate to the direction of travel.
- The vehicle display screens may not support your specific language.
- Display messages and interior labelling are written in **bold** letters.

Danger, Warnings and Cautions

Danger

Text marked  **Danger** provides information on risk of fatal injury. Disregarding this information may endanger life.

Warning

Text marked  **Warning** provides information on risk of accident or injury. Disregarding this information may lead to injury.

Caution

Text marked **Caution** provides information on possible damage to the vehicle. Disregarding this information may lead to vehicle damage.

Symbols

Page references are indicated with ⇨.
⇨ means "see page".

Thank you for choosing a Vauxhall.

We wish you many hours of pleasurable driving.

Your Vauxhall Team

In brief

Initial drive information

Vehicle unlocking


Radio remote control



Press button  to unlock the doors and load compartment. Open the doors by pulling the handles. To open the tailgate, press the button under the tailgate moulding.

Radio remote control ⇨ 21, Central locking system ⇨ 24, Load compartment ⇨ 26.

Open&Start

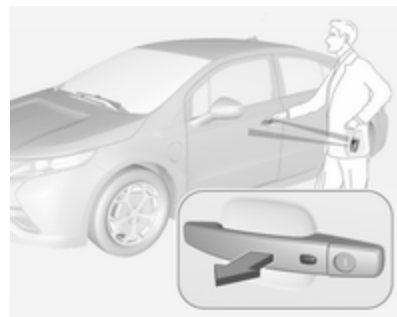

With the radio remote control within the opening range, simply press the lock/unlock button on the door handle.


To unlock all doors, press the lock/unlock button on the driver's door handle again within five seconds.

To open the tailgate, press the button under the moulding.

Open&Start system ⇨ 23.

Seat adjustment

Seat positioning

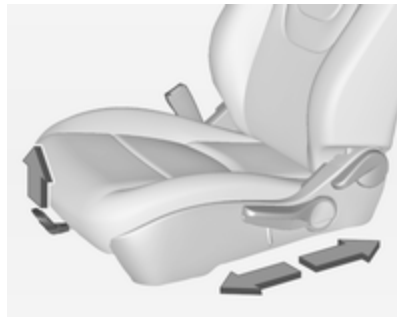

Pull handle, slide seat, release handle.

Seat position ⇨ 35, Seat adjustment ⇨ 36.

⚠ Danger

Do not sit nearer than 25 cm from the steering wheel, to permit safe airbag deployment.


Seat backrests



Pull lever, adjust inclination and release lever. Allow the seat to engage audibly.

Seat position ⇨ 35, Seat adjustment ⇨ 36.

Seat height

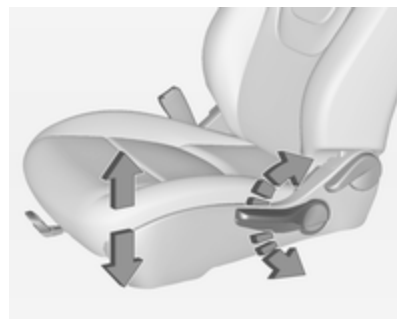


Lever pumping motion:

up = seat higher
down = seat lower

Seat position ⇨ 35, Seat adjustment ⇨ 36.

Head restraint adjustment

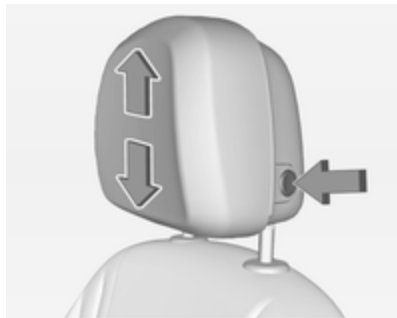

Press the button, adjust height and engage.

Head restraints ⇨ 34.

Seat belt




Pull out the seat belt and engage in belt buckle. The seat belt must not be twisted and must fit close against the body. The backrest must not be tilted back too far (maximum approx. 25 °).

To release belt, press red button on belt buckle.

Seat position ⇨ 35, Seat belts ⇨ 39, Airbag system ⇨ 42.

Mirror adjustment

Interior mirror

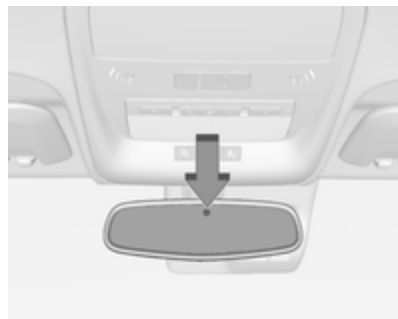

Dazzle from following vehicles at night is automatically reduced.

Automatic anti-dazzle interior mirror ⇨ 31.

Exterior mirrors



Select the relevant exterior mirror and adjust.

Convex exterior mirrors ⇨ 30,
Electric adjustment ⇨ 30, Folding
exterior mirrors ⇨ 30, Heated
exterior mirrors ⇨ 30.

Steering wheel adjustment




Unlock lever, adjust steering wheel,
then engage lever and ensure it is
fully locked.

Do not adjust steering wheel unless
vehicle is stationary and steering
wheel lock has been released.


Airbag system ⇨ 42.

Instrument panel overview

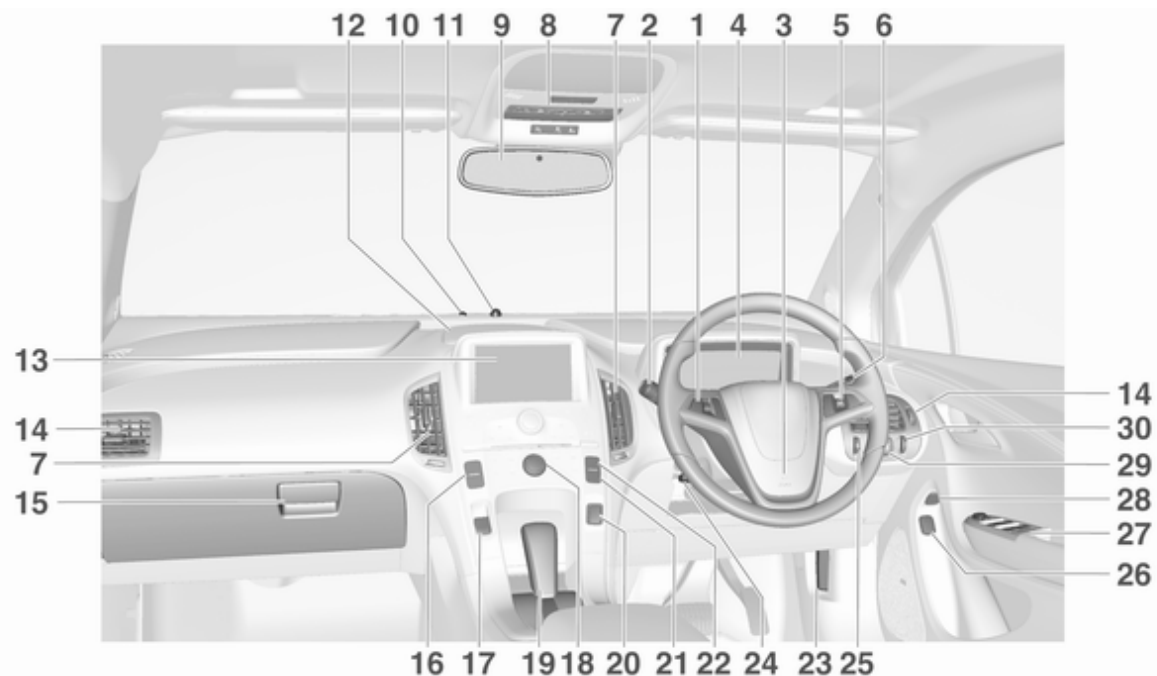


1	Cruise control	119	10	Charging status indicator	128	29	DIC controls	72
2	Light switch	88	11	Light sensor	88	30	Headlight range adjustment ..	89
	Turn and lane-change signals	90		Climate sensor	94			
	Pedestrian safety alert	60	12	Instrument panel storage	52			
3	Horn	60	13	Colour-Info-Display	74			
4	Instrument cluster	65	14	Side air vents	101			
	Driver Information Centre (DIC)	72	15	Glovebox	52			
5	Steering wheel controls	59	16	Central locking buttons	24			
7	Centre air vents	101	17	Electrical parking brake	114			
8	Dome lights	91	18	Infotainment system (see infotainment system manual)				
	Reading lights	91	19	Shift lever	112			
	Ultrasonic park assist	121	20	Power button	104			
	Anti-theft alarm system	28	21	Drive mode button	109			
	Electronic Stability Control ..	118	22	Leaf button	74			
	Traction Control System	117	23	Bonnet release lever	139			
	Seat belt reminder control	67	24	Steering wheel adjustment ...	59			
	Airbag deactivation control indicator	68	25	Instrument panel illumination control	91			
9	Interior mirror	31	26	Charge port door release button	125			
			27	Power windows	31			
			28	Fuel door release button	134			

Exterior lighting

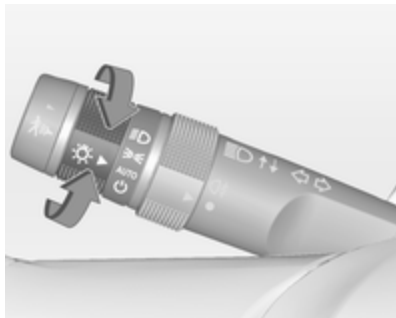

Turn adjuster wheel:


- AUTO** = automatic light control:
Exterior lighting is
switched on and off
automatically
- ☰ = activation or deactivation
of the automatic light
control
- ☞☜ = sidelights
- ☞☜☞ = low beam

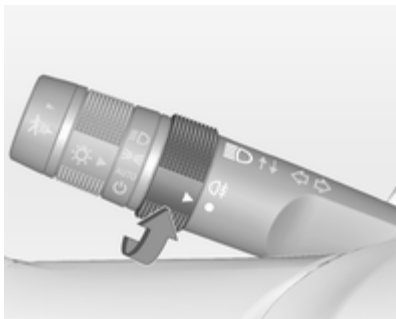

☞☜☞ = rear fog light

Lighting ⇨ 88.


Headlight flash, high beam and low beam

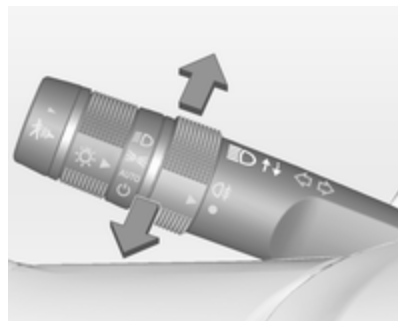

- headlight flash = pull lever
- high beam = push lever
- low beam = push or pull lever

Automatic light control ⇨ 88, High
beam ⇨ 89, Headlight flash ⇨ 89.

Turn and lane-change signals

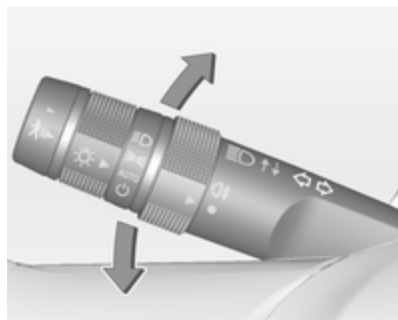

lever up = right turn signal
lever down = left turn signal

Turn and lane-change signals
↻ 90, Parking lights ↻ 90.

Hazard warning flashers




Operated with the  button.
Hazard warning flashers ↻ 89.

Horn



Press .
Horn ↻ 60.

Pedestrian safety alert

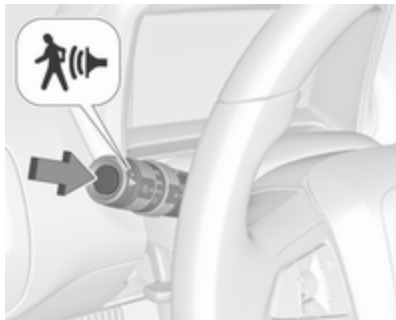


Push  to alert people who may not hear the vehicle approaching.

A soft-note alert will momentarily sound.

Pedestrian safety alert ⇨ 60.

Washer and wiper systems

Windscreen wiper

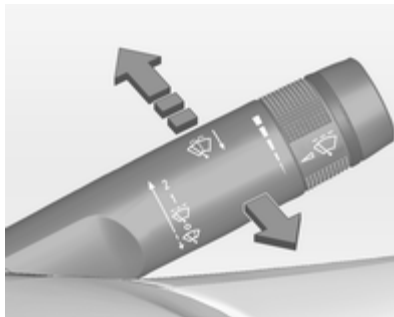

2 = fast

1 = slow


 = interval wiping

O = off

For a single wipe, press the lever down to .

Windscreen wiper ⇨ 60, Wiper blade replacement ⇨ 145.

Adjustable wiper interval

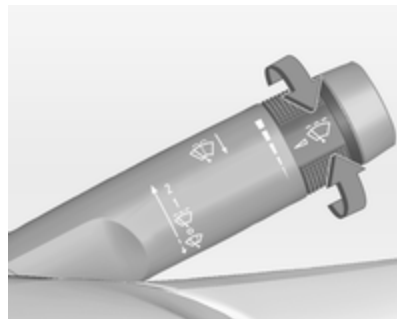

Wiper lever in position .

Turn the adjuster wheel to adjust the desired wipe interval:

short interval	= turn adjuster wheel upwards
long interval	= turn adjuster wheel downwards

Windscreen washer



Pull lever. Washer fluid is sprayed onto the windscreen and the wiper wipes a few times.

Windscreen washer system ⇨ 60,
Washer fluid ⇨ 142.

Climate control

Passenger compartment preconditioning

Activates the heating or air conditioning systems and the rear window defogger from outside the vehicle.

1. Press ; the doors will lock.



2. Within five seconds, press and hold until the turn signal lights flash. Pressing again during passenger compartment preconditioning, will deactivate the function.

Radio remote control ⇨ 21.

Heated rear window, heated exterior mirrors




Heating is operated by pressing the  button.

Heated rear window ⇨ 33.

Heated rearview mirror ⇨ 30.

Demisting and defrosting the windows

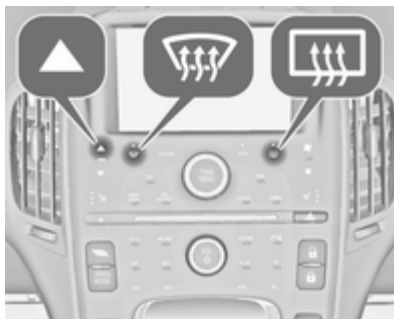

Press  button.

Set temperature to warmest level.

Heated rear window  on.

Automatic climate control system
⇨ 94.


Auto defog

The system monitors high humidity inside the vehicle. When detected, the system may adjust to outside air supply and turn on the air conditioning or the heater. The fan speed may slightly increase to help prevent

fogging. When high humidity is no longer detected, the system will return to its prior operation.

Automatic climate control system
⇨ 94.

Electric drive unit

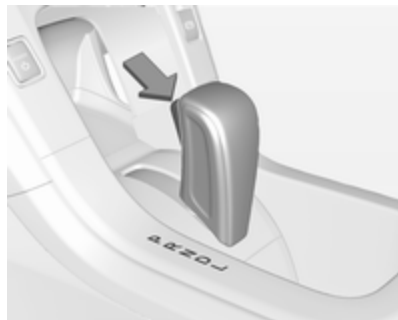

P = Park
R = Reverse
N = Neutral
D = Drive
L = Low

The shift lever can only be moved out of **P** when the ignition is on, the brake pedal is applied first and then the shift lever button is pressed.

Electric drive unit ⇨ 108.

Starting off

Check before starting off

- Tyre pressure and condition ⇨ 157, ⇨ 184.
- Engine oil level and fluid levels ⇨ 139.
- All windows, mirrors, exterior lighting and number plates are free from dirt, snow and ice and are operational.
- Proper position of mirrors, seats, and seat belts ⇨ 30, ⇨ 35, ⇨ 40.
- Brake function at low speed, particularly if the brakes are wet.

Starting the vehicle



- Move the shift lever to **P** or **N**. The propulsion system will not start in any other position.
- Move the steering wheel slightly to release the steering wheel lock.
- The radio remote control must be in the vehicle. Press the brake pedal and push ⏻.

Please regard that the operating condition of the vehicle is meant everytime the term "ignition on/off" is used.

Starting and stopping the vehicle
⇨ 106.

Power button ⇨ 104.

Electric vehicle operation modes

The vehicle has two operation modes: Electric and extended range. In both modes, the vehicle is propelled by its electric drive unit.

Several drive modes can be selected while driving in electric or extended range mode:



Press **DRIVE MODE** button as often as the desired drive mode is highlighted.



The following drive modes are selectable:

- **Normal**
- **Sport**
- **Mountain**
- **Hold**

Electric vehicle operation modes
⇨ 108.

Parking

- Do not park the vehicle on an easily ignitable surface. Things that can burn could touch hot exhaust parts under the vehicle and ignite.
- Always apply the parking brake. Pull switch (Ⓢ).
- Switch off the ignition. Turn the steering wheel until the steering wheel lock engages.
- If the vehicle is on a level surface or uphill slope, set the parking brake and then shift the selector lever to **P**, before switching off the ignition. On an uphill slope, turn the front wheels away from the kerb.
If the vehicle is on a downhill slope, set the parking brake and then shift the selector lever to **P**, before switching off the ignition. Turn the front wheels towards the kerb.
- Lock the vehicle and activate the anti-theft alarm system.
Radio remote control ⇨ 21.
Anti-theft alarm system ⇨ 28.

Keys, doors and windows

Keys, locks	20
Doors	26
Vehicle security	27
Exterior mirrors	30
Interior mirrors	31
Windows	31

Keys, locks

Keys

Replacement keys

The key number is specified in the Car Pass or on a detachable tag.

The key number must be quoted when ordering replacement keys as it is a component of the immobiliser system.

Locks ⇨ 171.

Lock cylinders

Designed to free-wheel if they are forcefully rotated without the correct key or if the correct key is not fully inserted. To reset, turn cylinder with the correct key until its slot is vertical, remove key and then re-insert it. If the cylinder still free-wheels, turn the key through 180° and repeat operation.

Key with foldaway key section



Press the button to extend the key.

Press the button and fold the key blade to retract the key.

Car Pass

The Car Pass contains security related vehicle data and should therefore be kept in a safe place.

When the vehicle is taken to a workshop, this vehicle data is needed in order to perform certain operations.

Radio remote control



Enables a keyless operation of the following functions:

- Central locking system ⇨ 24
- Open&Start system ⇨ 23
- Starting the vehicle ⇨ 106
- Anti-theft alarm system ⇨ 28
- Anti-theft locking system ⇨ 27
- Panic alarm
- Passenger compartment preconditioning

- Opening of the charge port door
- Comfort opening of the power windows ⇨ 31

The radio remote control has an approximate range of up to 200 feet. It can be restricted by external influences.

Handle with care, protect from moisture and high temperatures and avoid unnecessary operation.

Panic alarm

Press ► once to locate the vehicle. The exterior lights flash and the horn chirps three times.

Press ► and hold for three seconds to activate the panic alarm. The horn sounds and the turn signals flash for 30 seconds.

Press ► again to cancel the panic alarm.

Passenger compartment preconditioning

Activates the heating or air conditioning systems and the rear window defogger from outside the vehicle.

The auto heated seat can be programmed to come on when passenger compartment preconditioning is activated.

Vehicle personalisation ⇨ 83.

To maximise the electric range of the vehicle, use the passenger compartment preconditioning function while the vehicle is plugged in. Normal operation of the system will return after the ignition has been switched on.

Activating

1. Press ; the doors will lock.
2. Within five seconds, press and hold until the turn signal lights flash. Pressing again during passenger compartment preconditioning, will turn the feature off.

Passenger compartment preconditioning will automatically shut off after 10 minutes unless a time extension is activated.

After entering the vehicle during passenger compartment preconditioning, press the  button on the instrument panel with the brake pedal applied to operate as normal.

Extending the time

To extend the time of the first passenger compartment preconditioning, repeat the steps for activating passenger compartment preconditioning. Passenger compartment preconditioning can only be extended once between driving.

Cancelling passenger compartment preconditioning

To cancel passenger compartment preconditioning, do any of the following:

- Aim the radio remote control at the vehicle and press and hold  until the sidelights turn off.
- Turn on the hazard warning flashers.
- Press the  button on the instrument panel with the brake pedal applied, then press the  button again to switch the ignition off.

Conditions in which passenger compartment preconditioning may not work

Conditions in which passenger compartment preconditioning may not occur include:

- An open bonnet.
- Vehicle propulsion system fault conditions, including an emission control system malfunction.
- High voltage battery fault conditions.

A second passenger compartment preconditioning or extension will not occur if the fuel level is low.

Conditions in which passenger compartment preconditioning may be cancelled include:

- Vehicle propulsion system or high voltage battery fault conditions.
- Low engine oil pressure.
- Engine coolant temperature that is too high.

Charge port door

Press  to open the charge port door.

Charging ⇨ 125.

Fault in the radio remote control system

In the event that it is not possible to operate the radio remote control properly, it may be due to the following:

- Range exceeded
- Battery voltage too low
- Blocked signal

If the problem persists, seek the assistance of your workshop.

Keep in mind that other conditions, such as those stated, can impact the performance of the radio remote control.


Unlocking ⇨ 24.

Radio remote control battery replacement

Notice

When replacing the battery, do not touch any of the circuitry on the transmitter. Static from your body could damage the transmitter.

Replace the battery as soon as the range reduces.

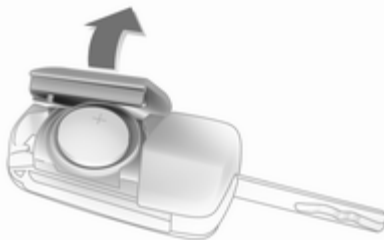

Extend the key and open the unit. Replace the battery (battery type CR 2032), paying attention to the installation position. Close the unit and check the operation of the radio remote control.



Batteries do not belong in household waste. They must be disposed of at an appropriate recycling collection point.

Open&Start system


A transponder within the radio remote control enables a passive locking and unlocking of the doors and the tailgate.

Furthermore the Open&Start system enables the starting of the vehicle.

Starting and stopping the vehicle ⇨ 106.

The radio remote control should be within three feet of the door or the tailgate being opened.

Unlocking

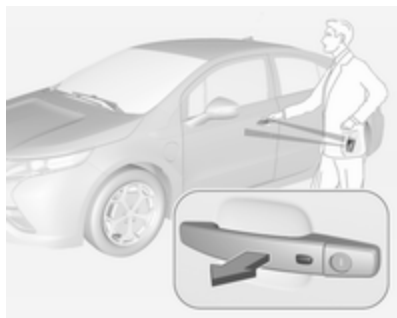

Two settings are selectable:

- To unlock all doors and the tailgate, press lock/unlock button on any of the door handles once
or
- press the lock/unlock button on the driver's door once to unlock only the driver's door. To unlock all doors and the tailgate, press lock/unlock button on the driver's door again within five seconds.

Vehicle personalisation ⇨ 83.

Locking

To lock the doors and the tailgate, press the lock/unlock button on any of the door handles if all doors are closed.

Central locking system

Unlocks and locks doors and the tailgate.

Notice

In the event of an accident in which airbags or belt pretensioners are deployed, the vehicle is automatically unlocked.

Unlocking



Press  button.

Two settings are selectable:

- To unlock all doors and the tailgate, press button  once
or
- press button  once to unlock only the driver's door. To unlock all doors and the tailgate, press button  twice within five seconds.

Power windows ⇨ 31.

Vehicle personalisation ⇨ 83.

The hazard warning flashers will flash twice each time the button is pressed and the anti-theft alarm system will be disarmed.

Anti-theft alarm system ⇨ 28.

Locking



Close doors, tailgate, fuel filler cap.
Press button .

The hazard warning flashers will flash once and the anti-theft alarm system will be armed.

Anti-theft alarm system ⇨ 28.

If the driver's door is open when  is pressed, all doors lock and then the driver's door will unlock if the **Prevent doorlock while door open** feature is enabled through the vehicle personalisation.

Vehicle personalisation ⇨ 83.

By pressing  twice within five seconds with all doors closed and the ignition switched off, all doors will be locked and the anti-theft locking system will be activated.

Anti-theft locking system ⇨ 27.

Central locking buttons



Locks or unlocks all doors.

Press the  button to lock.

Press the  button to unlock.

Lockout protection

If the  button on the instrument panel is pressed when the driver's door is open and the ignition is on, all doors will lock and the driver's door will unlock.

This feature can also be enabled when the ignition is off.

Vehicle personalisation ⇨ 83.

Fault in the central locking system

Unlocking

Manually unlock the driver's door by turning the key in the lock. The other doors can be opened by pulling the interior handle twice. The tailgate cannot be opened. To deactivate the anti-theft locking system, switch on the ignition ⇨ 28.

Locking

Push inside locking knob of all doors except driver's door. Then close the driver's door and lock it from the outside with the key. The tailgate cannot be locked.

Child locks



Warning

Use the child locks whenever children are occupying the rear seats.

Press  to activate. The LED comes on.

Press  again to deactivate. The LED goes out.


The rear doors cannot be opened from the inside.

Doors

Load compartment

Tailgate

Opening

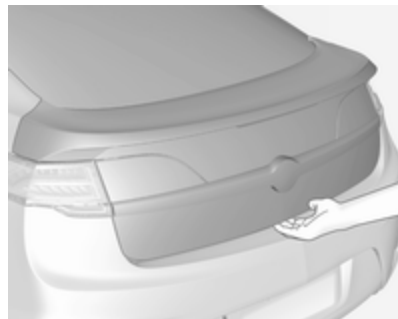

To open the tailgate with the doors unlocked, press the button on the underside of the tailgate handle and lift up.

If the doors are locked, it is necessary to open the tailgate with the radio remote control within the opening range.

Closing



Use the inside pull handle to lower and close the tailgate.

Always close the tailgate before driving. Do not press the button while closing the tailgate, it will unlatch again.

General hints for operating tailgate

⚠ Warning

Do not drive with the tailgate open or ajar, e.g. when transporting bulky objects, since toxic exhaust gases, which can not be seen or smelled, could enter the vehicle. This can cause unconsciousness and even death.

Caution

Before opening the tailgate, check overhead obstructions, such as a garage door, to avoid damage to the tailgate. Always check the moving area above and behind the tailgate.

Notice

The installation of certain heavy accessories onto the tailgate may affect its ability to remain open.

Vehicle security

Anti-theft locking system

⚠ Warning

Do not use the system if there are people in the vehicle! The doors cannot be unlocked from the inside.

The system deadlocks all the doors. All doors must be closed or the system cannot be activated.

Activation



Press  on the radio remote control twice within five seconds with all doors closed and the ignition switched off.

It is also possible to activate the anti-theft locking system by pressing the lock/unlock button on the driver door handle twice within five seconds.

Anti-theft alarm system

It monitors:

- Doors, tailgate, bonnet
- Passenger compartment including adjoining load compartment
- Vehicle inclination, e.g. if it is raised
- Removing of the charge cord

Activation

- Press the  button on the radio remote control after all of the doors and windows have been closed.
- Press the  button on the instrument panel when the **Prevent doorlock while door open** function is turned off.

Vehicle personalisation ⇨ 83.


The system arms itself 30 seconds after the vehicle has been locked.

By pressing  twice, the system will arm immediately.

Notice

Changes to the vehicle interior such as the use of seat covers or open windows, could impair the function of passenger compartment monitoring.

Activation without monitoring of passenger compartment and vehicle inclination

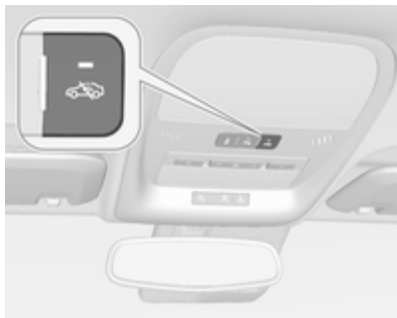

Switch off the monitoring of passenger compartment and vehicle inclination when animals are being left in the vehicle, because of high volume ultrasonic signals or movements triggering the alarm. Also switch off when the vehicle is on a ferry or train.

1. With the ignition switched off, press  in the overhead console. LED in the  button comes on.
2. Close all doors, tailgate and bonnet.
3. Activate the anti-theft alarm system.

Deactivation

Unlocking or approaching the vehicle with the radio remote control, deactivates the anti-theft alarm system.

Charge cord theft alert

To activate or deactivate the charge cord theft alert while plugged in, lock or unlock the vehicle with the radio remote control.

If there is an attempt to remove the charge cord while the vehicle is locked, the system alarm will be activated. To turn off the system alarm, press  on the radio remote control.

This function can be disabled in vehicle personalisation.

Vehicle personalisation ⇨ 83.

Alarm

When triggered, the alarm sounds via a separate battery-backed power sounder for about 30 seconds and the hazard warning lights flash simultaneously.

If the vehicle loses battery power when the anti-theft alarm system is armed, the power sounder will activate automatically.

The number and duration of alarm signals are stipulated by legislation.

To turn off the system alarm:

- Press  on the radio remote control or
- Start the vehicle by pressing the  button on the instrument panel with the brake pedal applied and the radio remote control located inside the vehicle.

Immobiliser

This vehicle has a passive theft-deterrent system. The system does not have to be manually activated or deactivated.

The immobiliser is activated automatically after the ignition is switched off.

The system is automatically disarmed when the vehicle is started with a valid radio remote control located inside the vehicle. The radio remote control uses electronic coding that matches an immobiliser control unit in the vehicle and automatically deactivates the system. Only a correct radio remote control can be used to switch the ignition on.

 comes on if there is a problem with activating or deactivating the immobiliser.

Notice

The immobiliser does not lock the doors. You should always lock the vehicle after leaving it and switch on the anti-theft alarm system ⇨ 24, ⇨ 28.

If the vehicle does not start and the control indicator stays on, there is a problem with the system. Attempt to switch the ignition off and try it again. If the problem persists, seek the assistance of a workshop.

Do not leave the radio remote control inside the vehicle.

Control indicator  ⇨ 71.

Exterior mirrors

Convex shape

The convex exterior mirror contains an aspherical area and reduces blind spots. The shape of the mirror makes objects appear smaller, which will affect the ability to estimate distances.


Electric adjustment



Select the relevant exterior mirror by moving the selector switch to left (**L**) or right (**R**). Then press the control pad to adjust the respective mirror.

In the centre position of the selector switch no mirror is selected.

Folding

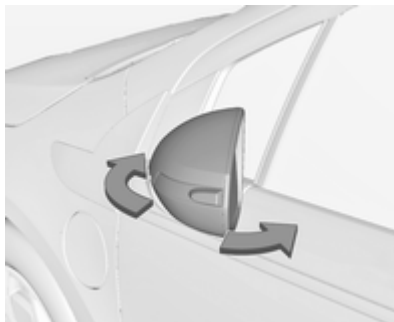

For pedestrian safety, the exterior mirrors will swing out of their normal mounting position if they are struck with sufficient force. Reposition the mirror by applying slight pressure to the mirror housing.

Heated




Operated by pressing the  button. Turns off automatically after about five minutes.

Heated rear window ⇨ 33.

Interior mirrors

Automatic anti-dazzle

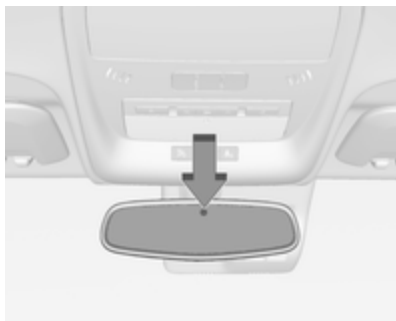

Dazzle from following vehicles at night is automatically reduced.

Windows

Power windows

Warning

Take care when operating the power windows. Risk of injury, particularly to children.

If there are children on the rear seats, switch on the child safety system for the power windows.

Keep a close watch on the windows when closing them. Ensure that nothing becomes trapped in them as they move.

Warning

Do not leave children together with the radio remote control inside the vehicle.

They could operate the windows, other controls or even move the vehicle, so that they could be seriously injured or killed.

Switch on ignition to operate the power windows.



Operate the switch for the respective window by pushing to open or pulling to close.

Pushing or pulling gently to the first detent: window moves up or down as long as the switch is operated.

Pushing or pulling firmly to the second detent and then releasing: window moves up or down automatically with safety function enabled. To stop movement, operate the switch once more in the same direction.

The driver window can be lowered or raised without holding the switch.

The passenger and rear windows can just be lowered without holding the switch.

Power windows can work until the driver's door is opened or at the latest for 10 minutes after the ignition is switched off.

Retained power off ⇨ 105.

Safety function

If the window glass encounters resistance above the middle of the window during automatic closing, it is immediately stopped and opened again.

Override safety function

In the event of closing difficulties due to frost or the like, pull and hold the switch. The window moves up without safety function. To stop movement, release the switch.

Use care when using the override safety function.

Child safety system for rear windows




Press switch  to deactivate rear door power windows, the LED illuminates.

Press  again to deactivate.

Operating windows from the outside

The windows can be opened remotely from outside the vehicle.

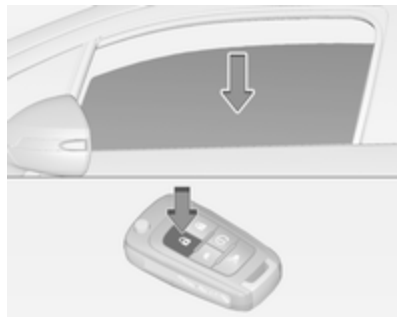

Press and hold  button to open windows.

Release button to stop window movement.

Overload

If the windows are repeatedly operated within short intervals, the window operation is disabled for some time.

Initialising the power windows

Initialise the power windows may be necessary if the 12 volt battery has been disconnected or discharged.

Activate the window electronics as follows:


1. Close all doors with the ignition on or when retained power off is active.
2. Pull switch until the window is closed and keep pulling for additional 2 seconds.
3. Repeat for each window.

Heated rear window



Operated by pressing the  button. Heating turns off automatically after about five minutes.

Sun visors

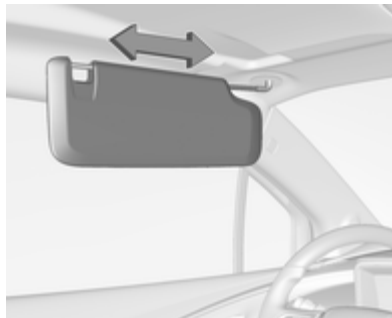

Pull the sun visor down to block glare. Detach the sun visor from the centre mount to pivot to the side window or to extend along the rod.

If the sun visors have integral mirrors, the mirror covers should be closed when driving.

Seats, restraints


Head restraints	34
Front seats	35
Seat belts	39
Airbag system	42
Child restraints	46

Head restraints

Position

Warning

Only drive with the head restraint set to the proper position.

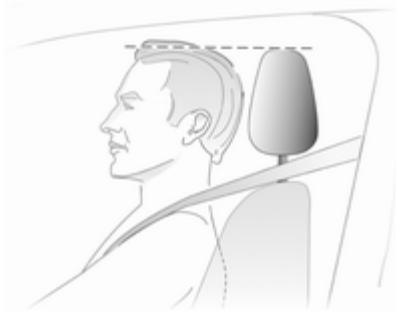


The upper edge of the head restraint should be at upper head level. If this is not possible for extremely tall people, set to highest position, and set to lowest position for small people.

Adjustment

Head restraints on front seats

Height adjustment

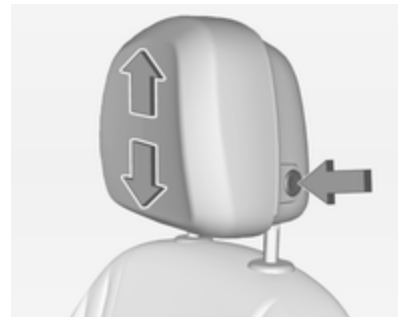

Press the button, adjust height and make sure that the head restraint is engaged.

Inclination adjustment



To adjust horizontally, pull the head restraint forwards. It engages in several positions.

To return to its rearmost position, pull fully forwards and release.

Head restraints on rear seats

Height adjustment



Pull the head restraint upwards or press the catch to release and push the head restraint downwards.

Make sure that the head restraint is engaged.

Front seats

Seat position

⚠ Warning

Only drive with the seat correctly adjusted.



- Sit with buttocks as far back against the backrest as possible. Adjust the distance between the seat and the pedals so that legs are slightly angled when pressing the pedals. Slide the front passenger seat as far back as possible.

- Sit with shoulders as far back against the backrest as possible. Set the backrest rake so that it is possible to easily reach the steering wheel with arms slightly bent. Maintain contact between shoulders and the backrest when turning the steering wheel. Do not angle the backrest too far back. We recommend a maximum rake of approx. 25°.
- Adjust the steering wheel ↻ 59.
- Set seat height high enough to have a clear field of vision on all sides and of all display instruments. There should be at least one hand of clearance between head and the roof frame. Your thighs should rest lightly on the seat without pressing into it.
- Adjust the head restraint ↻ 34.

Seat adjustment


⚠ Danger

Do not sit nearer than 25 cm from the steering wheel, to permit safe airbag deployment.

⚠ Warning

Never adjust seats while driving as they could move uncontrollably.

Seat positioning

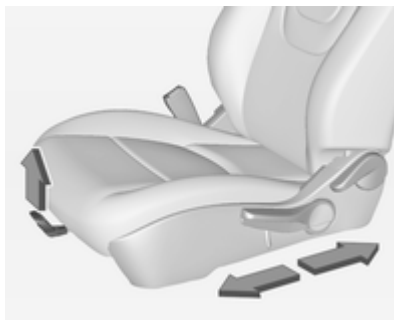

Pull handle, slide seat, release handle.


Seat backrests



Pull lever, adjust inclination and release lever. Allow the backrest to engage audibly.

To return the seatback to the upright position, pull the lever without applying pressure to the seatback and release lever.

Seat height

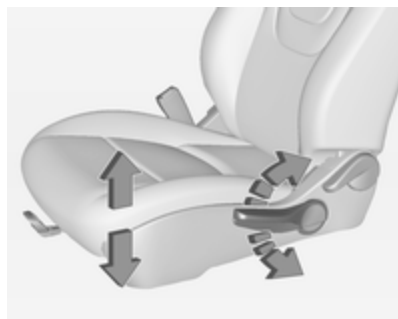

Lever pumping motion:

up = seat higher

down = seat lower

Heating

Manual heated seats



Adjust heating to the desired setting by pressing the  button for the respective seat one or more times. The LEDs next to the heating symbol indicate the setting.

Prolonged use of the highest setting for people with sensitive skin is not recommended.

Auto heated seats

Activation

To activate auto heated seats:



1. Press the **Climate** control button on the instrument panel.



2. Press **AUTO** on the touch screen of the Colour-Info-Display. The **AUTO** button illuminates green as a confirmation of the setting.

When the ignition is switched on, the auto heated seats function will automatically activate the heated seats at the level required by the vehicle's interior temperature.

The LEDs next to the seat heating symbol on the instrument panel indicate the heat setting.

Auto heated seats can be programmed to always be enabled when the ignition is on.

Vehicle personalisation ⇨ 83.

Deactivation

To deactivate auto heated seats:

- Press **AUTO** on the touch screen of the Colour-Info-Display
- or
- Press the button for the respective seat on the instrument panel.

Heated seats during passenger compartment preconditioning

When it is cold outside, the heated seats can be programmed to turn on automatically during passenger compartment preconditioning. Unless the auto heated seats function is available and enabled, the heated seats will be cancelled when the ignition is switched on. If the auto heated seats function is enabled, the seat heating level will automatically change to the level required by the vehicle's interior temperature when the ignition is switched on.

The LEDs next to the seat heating symbol do not turn on during passenger compartment preconditioning.

The temperature performance of an unoccupied seat may be reduced. This is normal.

The heated seats will not turn on during passenger compartment preconditioning unless the heated seats feature is enabled in the vehicle personalisation menu.

Vehicle personalisation ⇨ 83.

Passenger compartment preconditioning ⇨ 21.

Seat belts



The seat belts are locked during heavy acceleration or deceleration of the vehicle holding the occupants in the sitting position. Thereby the risk of injury is considerably reduced.

⚠ Warning

Fasten seat belt before each trip. In the event of an accident, people not wearing seat belts endanger their fellow occupants and themselves.

Seat belts are designed to be used by only one person at a time. They are not suitable for people smaller than 150 cm. Child restraint system ⇨ 46.

Periodically check all parts of the belt system for damage and proper functionality.

Have damaged components replaced. After an accident, have the belts and triggered belt pretensioners replaced by a workshop.

Notice

Make sure that the belts are not damaged by shoes or sharp-edged objects or are trapped. Prevent dirt from getting into the belt retractors.

Seat belt reminder 🚨 ⇨ 67.

Belt force limiters

On the front seats, stress on the body is reduced by the gradual release of the belt during a collision.

Belt pretensioners

In the event of a head-on or rear-end collision of a certain severity, the front seat belts are tightened.

⚠ Warning

Incorrect handling (e.g. removal or fitting of belts) can trigger the belt pretensioners.

Deployment of the belt pretensioners is indicated by continuous illumination of control indicator 🚨 ⇨ 67.

Triggered belt pretensioners must be replaced by a workshop. Belt pretensioners can only be triggered once.

Notice


Do not affix or install accessories or other objects that may interfere with the operation of the belt pretensioners. Do not make any modifications to belt pretensioner components as this will invalidate the vehicle type approval.

Three-point seat belt

Fastening



Withdraw the belt from the retractor, guide it untwisted across the body and insert the latch plate into the buckle. Tighten the lap belt regularly whilst driving by pulling the shoulder belt. Seat belt reminder ➤ 67.

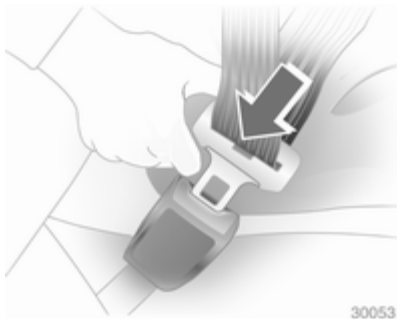

Loose or bulky clothing prevents the belt from fitting snugly. Do not place objects such as handbags or mobile phones between the belt and your body.

Warning

The belt must not rest against hard or fragile objects in the pockets of your clothing.

Removing



To release belt, press red button on belt buckle.

Seat belt comfort guides on the rear seats


The guides may provide added seat belt comfort for older children who have outgrown booster seats and for some adults. When installed and properly adjusted, the comfort guide positions the seat belt away from the neck and head.

There is one guide for each rear seat. When using a comfort guide, remove the seat belt from the seat-mounted guide before using the comfort guide.

Installation:



1. Remove the guide from its storage clip on the interior body trim next to the rear seat.

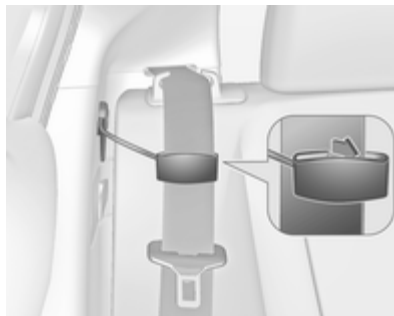

2. Place the guide over the belt, and insert the two edges of the seat belt into the slots of the guide.
3. The seat belt should not be twisted and it should lie flat. The elastic cord must be under the seat belt and the guide on top.

⚠ Warning

A seat belt that is not properly worn may not provide the protection needed in a crash. The person wearing the seat belt could be seriously injured. The shoulder belt should go over the shoulder

and across the chest. These parts of the body are best able to take belt restraining forces.



4. Buckle and position the seat belt as described previously in this section. Make sure that the shoulder belt crosses the shoulder.
5. To remove and store the comfort guide, squeeze the seat belt edges together so that the seat belt can be removed from the guide. Slide the guide back into its storage clip.

Using the seat belt while pregnant



⚠ Warning

The lap belt must be positioned as low as possible across the pelvis to prevent pressure on the abdomen.

Airbag system

The airbag system consists of a number of individual systems depending on the scope of equipment.

When triggered the airbags inflate within milliseconds. They also deflate so quickly that it is often unnoticeable during the collision.

⚠ Warning

If handled improperly the airbag systems can be triggered in an explosive manner.

Notice

The airbag systems and belt pretensioner control electronics are located in the centre console area. Do not put any magnetic objects in this area.

Do not stick anything on the airbag covers and do not cover them with other materials.

Each airbag is triggered only once. Have deployed airbags replaced by a workshop. Furthermore, it might be necessary to have the steering wheel, the instrument panel, parts of the panelling, the door seals, handles and the seats replaced.


Do not make any modifications to the airbag system as this will invalidate the vehicle type approval.

When the airbags inflate, escaping hot gases may cause burns.

Control indicator  for airbag systems  67.

Front airbag system

The front airbag system consists of one airbag in the steering wheel and one in the instrument panel on the front passenger side. These can be identified by the word **AIRBAG**.

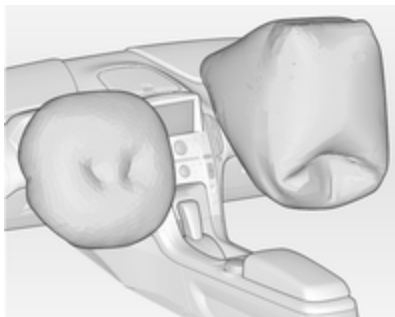

The front airbag system is triggered in the event of a front-end impact of a certain severity. The ignition needs to be switched on.

The inflated airbags cushion the impact, thereby reducing the risk of injury to the upper body and head of the front seat occupants considerably.

Warning

Optimum protection is only provided when the seat is in the proper position ↗ 35.

Keep the area in which the airbag inflates clear of obstructions.

Fit the seat belt correctly and engage securely. Only then the airbag is able to protect.

Side airbag system

The side airbag system consists of an airbag in each side of the front seat backrests. This can be identified by the word **AIRBAG**.

The side airbag system is triggered in the event of a side impact of a certain severity. The ignition needs to be switched on.



The inflated airbags cushion the impact, thereby reducing the risk of injury to the upper body and pelvis in the event of a side-on collision considerably.

Warning

Keep the area in which the airbag inflates clear of obstructions.


Notice

Only use protective seat covers that have been approved for the vehicle. Be careful not to cover the airbags.

Curtain airbag system

The curtain airbag system consists of an airbag in the roof frame on each side. This can be identified by the word **AIRBAG** on the roof pillars.

The curtain airbag system is triggered in the event of a side-on impact of a certain severity. The ignition needs to be switched on.

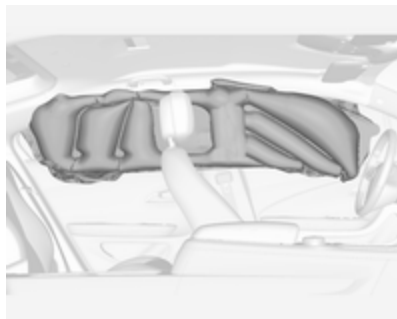

The inflated airbags cushion the impact, thereby reducing the risk of injury to the head in the event of a side-on impact considerably.


Warning

Keep the area in which the airbag inflates clear of obstructions.

The hooks on the handles in the roof frame are only suitable for hanging up light articles of clothing, without coat hangers. Do not keep any items in these clothes.

Knee airbag system

The knee airbags are located below the steering column and below the glovebox.

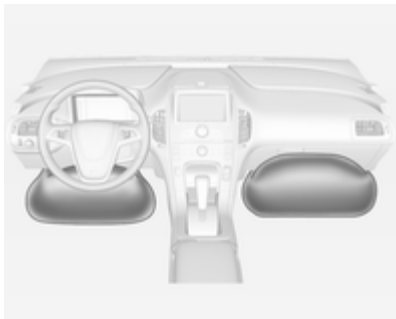

With knee airbags, the word **AIRBAG** will appear on the lower portion of the instrument panel.


The knee airbag system is triggered in the event of a front-end impact of a certain severity. The ignition needs to be switched on.

The inflated airbags cushion the impact, thereby reducing the risk of injury to the lower body of the front seat occupants considerably.

Keep the area in which the airbag inflates clear of obstructions.

Airbag deactivation

Front airbag and knee airbag systems for the front passenger seat must be deactivated if a child restraint system is to be fitted on this seat. The curtain and side airbag systems, the belt pretensioners and all driver airbag systems will remain active.

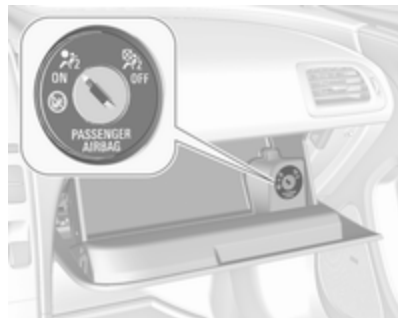

The front passenger airbag system can be deactivated via a key-operated switch located inside the glovebox.

Use the ignition key to choose the position:

: Front passenger frontal and knee airbags are deactivated and will not inflate in the event of a collision. Control indicator  illuminates continuously. A child restraint system can be installed in accordance with the chart child restraint installation locations ⇨ 48. No adult person is allowed to occupy the front passenger seat.

: Front passenger frontal and knee airbags are active. A child restraint system must not be installed.

Danger

Risk of fatal injury for a child using a child restraint system on a seat with activated front passenger frontal and knee airbag.

Risk of fatal injury for an adult person on a seat with deactivated front passenger frontal and knee airbag.



As long as the control indicator  is not illuminated, the airbag systems for the front passenger seat will inflate in the event of a collision.

If both control indicators are illuminated at the same time, there is a system failure. The status of the system is not discernible, therefore no person is allowed to occupy the front passenger seat. Contact a workshop immediately.

Consult a workshop immediately if neither of the two control indicators is illuminated.

Change status only when the vehicle is stopped with the ignition off.

Control indicator for airbag deactivation ⇨ 68.

Child restraints

Child restraint systems

We recommend the Vauxhall child restraint system which is tailored specifically to the vehicle.

When a child restraint system is being used, pay attention to the following usage and installation instructions and also those supplied with the child restraint system.

Always comply with local or national regulations. In some countries, the use of child restraint systems is forbidden on certain seats.

Danger

When using a child restraint system on the front passenger seat, the airbag systems for the front passenger seat must be deactivated; if not, the triggering of the airbags poses a risk of fatal injury to the child.

This is especially the case if rear-facing child restraint systems are used on the front passenger seat.



Selecting the right system

The rear seats are the most convenient location to fasten a child restraint system. Children should travel facing rearwards in the vehicle as long as possible. This makes sure that the child's backbone, which is still very weak, is under less strain in the event of an accident.

Children under the age of 12 years that are smaller than 150 cm are only allowed to travel in a restraint system that is suitable for the child. Suitable are restraint systems that comply with ECE 44-03 or ECE 44-04. Since a proper position of the belt is rarely possible with a child that is smaller than 150 cm, we strongly advise the use of an appropriate child restraint system, even though this may, due to the age of the child, no longer be legally binding.

Ensure that the child restraint system to be installed is compatible with the vehicle type.

Ensure that the mounting location of the child restraint system within the vehicle is correct.

Allow children to enter and exit the vehicle only on the side facing away from the traffic.

When the child restraint system is not in use, secure the seat with a seat belt or remove it from the vehicle.

Notice

Do not stick anything on the child restraint systems and do not cover them with any other materials.

A child restraint system which has been subjected to stress in an accident must be replaced.

Child restraint installation locations

Permissible options for fitting a child restraint system

Mass group	On front passenger seat		On rear outboard seats
	activated airbag	deactivated airbag	
Group 0: Up to 10 kg	X	U ¹	U
Group 0+: Up to 13 kg	X	U ¹	U
Group I: 9 to 18 kg	X	U ¹	U
Group II: 15 to 25 kg	X	X	U
Group III: 22 to 36 kg	X	X	U

¹ = Seating position must be adjusted to full up seat height travel.

U = Suitable for universal category restraints approved for use in this mass group.

X = Seat position not suitable for children in this mass group.

Permissible options for fitting an ISOFIX child restraint system

Mass group	Size class	Fixture	On front passenger seat	On rear outboard seats
Group 0: up to 10 kg	E	ISO/R1	X	IL ¹
Group 0+: up to 13 kg	E	ISO/R1	X	IL ¹
	D	ISO/R2	X	IL ¹
	C	ISO/R3	X	IL ¹
Group I: 9 to 18 kg	D	ISO/R2	X	IL ¹
	C	ISO/R3	X	IL ¹
	B	ISO/F2	X	IL, IUF
	B1	ISO/F2X	X	IL, IUF
	A	ISO/F3	X	IL

IL = Suitable for particular ISOFIX restraint systems of the 'specific-vehicle', 'restricted' or 'semi-universal' categories. The ISOFIX restraint system must be approved for the specific vehicle type.

IUF = Suitable for ISOFIX forward-facing child restraint systems of universal category approved for use in this mass group.

X = ISOFIX position not suitable for ISOFIX child restraint systems in this mass group and/or the size class.

¹ = Seat in front of ISOFIX position must be adjusted in length and inclination of backrest for a proper installation child restraint system.

ISOFIX size class and seat device

- A – ISO/F3 = Forward-facing child restraint system for children of maximum size in the weight class 9 to 18 kg.
- B – ISO/F2 = Forward-facing child restraint system for smaller children in the weight class 9 to 18 kg.
- B1 – ISO/F2X = Forward-facing child restraint system for smaller children in the weight class 9 to 18 kg.
- C – ISO/R3 = Rear-facing child restraint system for children of maximum size in the weight class up to 13 kg.
- D – ISO/R2 = Rear-facing child restraint system for smaller children in the weight class up to 13 kg.
- E – ISO/R1 = Rear-facing child restraint system for young children in the weight class up to 13 kg.

ISOFIX child restraint systems



Fasten vehicle-approved ISOFIX child restraint systems to the ISOFIX mounting brackets.

ISOFIX mounting brackets are indicated by a label  on the backrest.

Top-tether fastening eyes



The Top-tether anchors for outboard rear seating positions are on the back of the rear seatback. Be sure to use an anchor on the same side of the vehicle as the seating position where the child restraint will be placed.

Top-tether fastening eyes are marked with the symbol  for a child seat.

In addition to the ISOFIX mounting, fasten the Top-tether strap to the Top-tether fastening eyes. The strap must run between the two guide posts of the head restraint.

Storage

Storage compartments	52
Load compartment	54
Loading information	57

Storage compartments

Instrument panel storage



A storage compartment is located on top of the instrument panel.

A transmitter slot for the radio remote control transmitter is located inside the storage compartment.

Radio remote control ↗ 21.

Starting and stopping the vehicle
↗ 106.

Glovebox



Open the glove box by lifting up on the lever.

The glovebox should be closed whilst driving.

Cupholders



Cupholders are located in the front floor console.



Additional cupholders are located in the rear floor console.


Door panel storage



A storage compartment is located in the door trim.

Long objects, such as an umbrella, can be slid into the opening of either the driver or passenger door.

Armrest storage

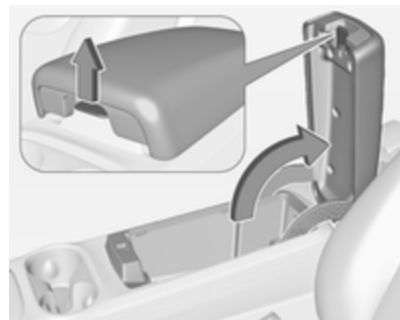


Pull grip to fold up the armrest.



An USB port and an AUX socket are located inside the front of the floor console. Cords can be routed in the pass-through.

For more information, see the infotainment manual.

Centre console storage

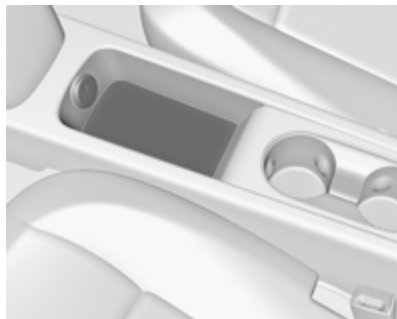

A storage compartment is located in the centre console of the rear seats.

Load compartment

Folding the seat backrests

Fold seat backrests down


Notice

Folding a rear seat with the seat belts still fastened may cause damage to the seat or the seat belts. Always unbuckle the seat belts and return them to their normal stowed position before folding a rear seat.

1. Remove the load compartment cover, if necessary.
2. Press and hold the catch, then push the head restraints down.



3. Remove the seat belt from the seat belt guide and place it in the storage clip.

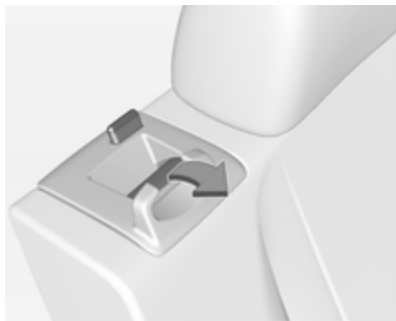

4. Pull the seatback release lever to unlock the seatback and fold the seatback forward.

Fold seat backrests up

Notice


Damage to the seat belt or seat backrest locking mechanism can occur if the seat belt is caught between the rear seat backrest and the seat backrest locking mechanism. The seat belt must be out of the way when the rear seat is raised to the upright, locked position.

If the seat belt is damaged, seek the assistance of a workshop and have it replaced.

Warning

Only drive the vehicle when the backrests are securely locked into position. Otherwise there is a risk of personal injury or damage to the load or vehicle in the event of heavy braking or a collision.

1. Pull the seat belt gently out of the storage clip and hold it in this position.

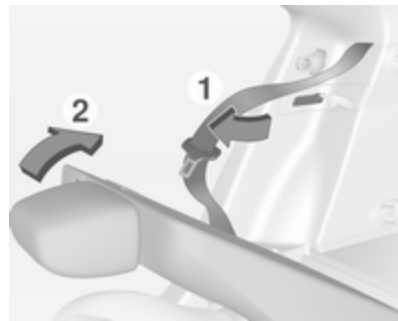

2. Raise the seat backrest and push it rearward to lock it into place.
Ensure that the seat backrest is audibly engaged.
3. Return the seat belt to the seat belt guide after raising the seat backrest.

Keep the seat in the upright, locked position when not in use.

Rear storage



A storage compartment is located in the right side of the load compartment behind a cover.

Remove the cover by pushing the latch.

Load compartment cover



Use the four loops to hook the cover to the side panels.

Do not place any objects on the cover.

Lashing eyes



The lashing eyes are designed to secure items against slippage, e.g. using lashing straps.

Warning triangle



The warning triangle is located in a compartment under the floor cover in the load compartment.

First aid kit



The first aid kit is located in a compartment under the floor cover in the load compartment.

Loading information



- Heavy objects in the load compartment should be placed against the seat backrests. Make sure that the backrests are securely engaged. If objects can be stacked, heavier objects should be placed at the bottom.
- Secure objects with lashing straps attached to lashing eyes.
- Secure loose objects in the load compartment to prevent from sliding.

- When transporting objects in the load compartment, the backrests of the rear seats must not be angled forward.
- Do not allow the load to protrude above the upper edge of the backrests.
- Do not place any objects on the load compartment cover or the instrument panel, and do not cover the sensor on top of the instrument panel.
- The load must not obstruct the operation of the pedals, shift lever, or hinder the freedom of movement of the driver. Do not place any unsecured objects in the interior.
- Do not drive with an open load compartment.

Warning

Always make sure that the load in the vehicle is securely stowed. Otherwise objects can be thrown

around inside the vehicle and cause personal injury or damage to the load or car.

- The payload is the difference between the permitted gross vehicle weight and the EC kerb weight.

To calculate the payload, enter the data for your vehicle in the weights table at the front of this manual.

The EC kerb weight includes weights for the driver (68 kg), luggage (7 kg) and all fluids (tank 90 % full).

Optional equipment and accessories increase the kerb weight.

Instruments and controls

Controls	59
Warning lights, gauges and indicators	63
Information displays	72
Vehicle messages	83
Vehicle personalisation	83

Controls

Steering wheel adjustment



Unlock lever, adjust steering wheel, then engage lever and ensure it is fully locked.

Do not adjust steering wheel unless vehicle is stationary and steering wheel lock has been released.

Steering wheel controls



The Infotainment system and the cruise control can be operated via the controls on the steering wheel.

Further information is available in the Infotainment system manual.

Cruise control ⇨ 119.


Horn



Press  to sound the horn.
Do not use the horn as pedestrian safety alert.

Pedestrian safety alert

Pedestrian safety alert enables the driver to alert people who may not hear the vehicle approaching.

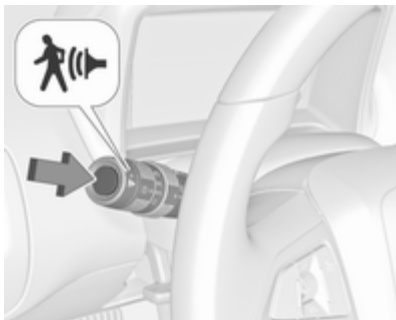


Push  and a soft-note alert will momentarily sound.

The pedestrian safety alert is only available when the vehicle is moving less than 40 mph or is stopped and shift lever is not in **P**.

Windscreen wiper/washer

Windscreen wiper

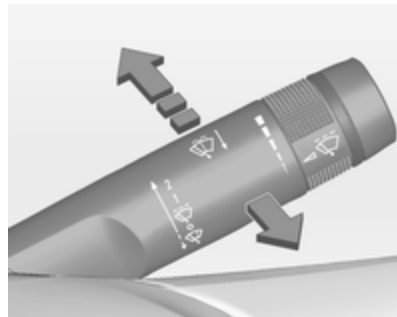


- 2** = fast
- 1** = slow
-  = interval wiping
- O** = off

For a single wipe when the windscreen wiper is off, press the lever down to .

Do not use if the windscreen is frozen.
Switch off in car washes.

Adjustable wiper interval

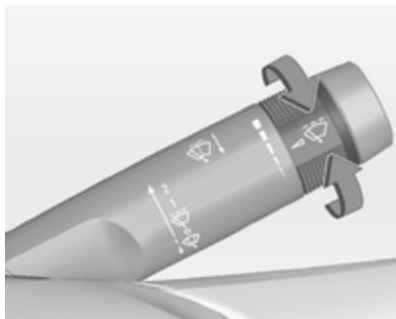

Wiper lever in position .

Turn the adjuster wheel to adjust the desired wipe interval:

- | | |
|----------------|---------------------------------|
| short interval | = turn adjuster wheel upwards |
| long interval | = turn adjuster wheel downwards |

Windscreen washer



Pull lever. Washer fluid is sprayed onto the windscreen and the wiper wipes a few times.

Clock

The clock is shown in the Colour-Info-Display.

Set clock

1. Press the **CONFIG** button and select **Time** from the list by pressing the **TUNE/MENU** button.

2. Turn the **TUNE/MENU** knob or press **▲** or **▼** on the touch screen to increase or decrease the hours and minutes displayed on the clock.
3. Press the **TUNE/MENU** knob to switch from hours to minutes and vice versa. It is also possible to switch from hours to minutes and vice versa by pressing the desired setting on the touch screen.

Selectable setting options:

- **12 hours / 24 hours format:**
Changes indication of hours between 12 hours and 24 hours.
- **Day + or Day -:** Increases or decreases the day shown in the Colour-Info-Display.

Notice

Please regard that the set time in the clock menu is the system's reference for delayed charging.

Charging  125.

Vehicle personalisation  83.

Power outlets



12 volt power outlets are located in the front armrest storage compartment and the rear centre floor console.



Additional to that, a 12 volt power outlet is located inside the instrument panel storage compartment.



Do not exceed the maximum power consumption of 180 watts.

The power outlets supply power while the ignition is on or if the vehicle is in the retained power off-mode.

Retained power off ⇨ 105.


Electrical accessories that are connected must comply with the electromagnetic compatibility requirements laid down in DIN VDE 40 839.

Do not connect any current-delivering accessories, e.g. electrical charging devices or batteries.

Do not damage the outlets by using unsuitable plugs.

Warning lights, gauges and indicators

Speedometer

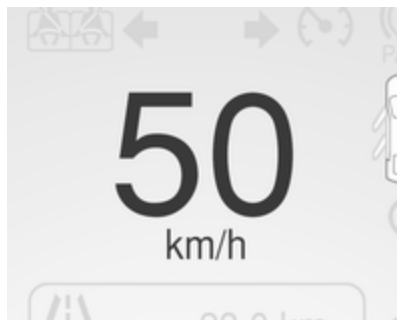


Indicates vehicle speed.

The shown unit can be changed in the Driver Information Centre (DIC).

Driver Information Centre (DIC)
⇨ 72.

Odometer

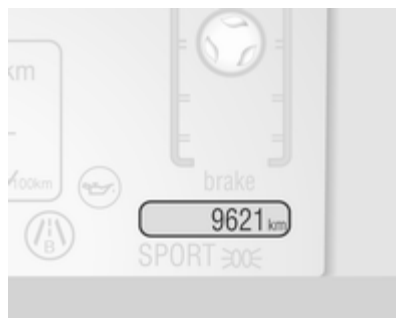


Displays the recorded distance.

The shown unit can be changed in the Driver Information Centre (DIC).

Driver Information Centre (DIC)
⇨ 72.

Trip odometer

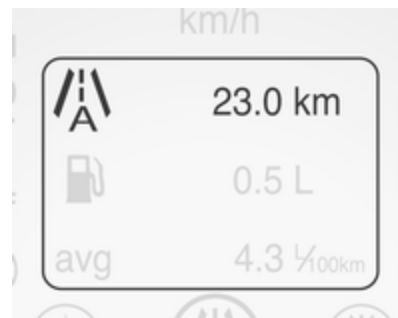


Displays the recorded distance since the last trip reset.

Reset the trip data by pressing and holding the **SELECT** button of the Driver Information Centre (DIC) controls when either trip A or trip B is displayed.

The trip odometer is within the DIC.

Driver Information Centre (DIC)
⇨ 72.

Fuel gauge

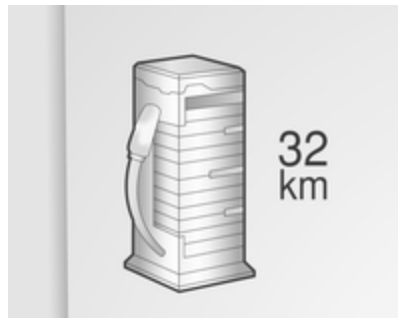


Displays the fuel level in the tank and the fuel range.

Never run the tank dry.

Because of the fuel remaining in the tank, the top-up quantity may be less than the specified tank capacity.

Extended range mode ↗ 108.

Battery gauge

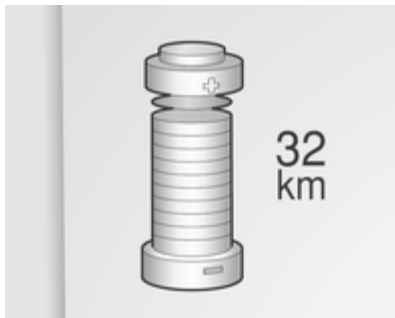

Displays the charge level and the range of the high voltage battery.

Electric mode ↗ 108.

Driving efficiency gauge



This gauge is a guide to driving in an efficient manner by keeping the ball green and in the centre of the gauge. The leaves stop spinning when the vehicle stops or when the ball travels away from the centre of the gauge.

accel: If the ball turns yellow and travels above the centre of the gauge, acceleration is too aggressive to optimise efficiency.

brake: If the ball turns yellow and travels below the centre of the gauge, braking is too aggressive to optimise efficiency.

Driving economically ⇨ 103

Depending on the setting, this gauge can be hidden and be replaced by either the fuel or the battery gauge.

Driver Information Centre (DIC)

⇨ 72.

Total vehicle range



Displays the total vehicle range combining the electric range and fuel range.

Driving economically ⇨ 103.

Service display

The engine oil life system displays the percentage of the remaining oil life.

Based on driving conditions, the interval at which an engine oil and filter change will be indicated can vary considerably.

The system must be reset every time the engine oil is changed to allow proper functionality. Seek the assistance of a workshop.

When the system has calculated that engine oil life has been diminished, **Change Engine Oil Soon** appears in the Driver Information Centre. Have engine oil and filter changed by a workshop within the next 600 miles.

Driver Information Centre ⇨ 72.

Service information ⇨ 174.

Control indicators

The control indicators described are not present in all vehicles. The description applies to all instrument versions. Depending on the equipment, the position of the control

indicators may vary. When the ignition is switched on, most control indicators will illuminate briefly as a functionality test.

The control indicator colours mean:

- | | |
|--------|-------------------------------|
| red | = danger, important reminder |
| yellow | = warning, information, fault |
| green | = confirmation of activation |
| blue | = confirmation of activation |
| white | = confirmation of activation |

Control indicators in the instrument cluster



Control indicators in the overhead console



Turn signal

↔ Illuminates or flashes green.

Flashes

The control indicator flashes if a turn signal or the hazard warning flashers are activated.

Fast flashing: failure of a turn signal light or associated fuse.

Bulb replacement ↗ 145.

Fuses ↗ 148.

Turn signals ↗ 90.

Seat belt reminder

Seat belt reminder on front seats

⚠ for driver's seat illuminates or flashes red.

⚠ for front passenger seat illuminates or flashes red, when seat is occupied.

The seat belt reminder of the front passenger seat may also turn on if an object is put on the seat.

Illuminates

After the warning lights of the respective front seat have flashed for a while, until the seat belt has been fastened.

Flashes

Up to a certain time after the ignition has been switched on.

Seat belt status on rear seats

⚠ flashes or illuminates.

Illuminates

After the ignition has been switched on, the seat belt light illuminates red.

After the passenger seat belts have been buckled, the corresponding seat belt light turns green.

Flashes

While the vehicle is moving, if a second row passenger who was previously buckled becomes unbuckled, the corresponding seat belt symbol will flash red for several seconds and a chime may sound.

Fastening the seat belt ↗ 40.

Airbag and belt tensioners

⚠ illuminates red.

When the ignition is switched on, the control indicator illuminates for several seconds. If it does not illuminate, does not go out after some seconds or illuminates whilst driving, there is a fault in the airbag system. Seek the assistance of a workshop.

The airbags and belt pretensioners may fail to trigger in the event of an accident.

A message may also display in the Driver Information Centre (DIC).

Deployment of the belt pretensioners or airbags is indicated by continuous illumination of .

Warning

Have the cause of the fault remedied immediately by a workshop.

Belt pretensioners, airbag system
↗ 39, ↗ 42.

Driver Information Centre (DIC)
↗ 72.

Airbag deactivation

 illuminates yellow.

The front passenger frontal and knee airbag are activated.

 illuminates yellow.

The front passenger frontal and knee airbag are deactivated ↗ 44.

Danger

Risk of fatal injury for a child using a child restraint system on a seat with activated front passenger frontal and knee airbag.

Risk of fatal injury for an adult person on a seat with deactivated front passenger frontal and knee airbag.

If, after several seconds, both status indicator lights remain on or if there are no lights at all, there may be a problem with the lights or the airbag deactivation switch. Seek the assistance of a workshop.

Charging system

 illuminates red.

Illuminates briefly when the ignition is switched on.

Light stays on or illuminates while driving

1. Move out of the flow of traffic as quickly as possible without impeding other vehicles.
2. Stop, switch off the ignition.
3. Seek the assistance of a workshop.

Driving while this light is on could drain the 12 volt battery.

Malfunction indicator light

 illuminates or flashes yellow.

Illuminates in service only mode

Illuminates as a check, showing if the service only mode is working. If a fault is detected, seek the assistance of your workshop.

Power button ↗ 104.

Illuminates when the ignition is on

Fault in the emission control system. The permitted emission limits may be exceeded.

The following may correct an emission system malfunction:

- Ensure that the fuel cap is installed correctly.
- Ensure that good quality fuel is used.

If none of the above have made the light turn off, seek the assistance of a workshop immediately.

Flashes when the ignition is on

Misfire condition has been detected. Ease up on the accelerator, reduce vehicle speed and/or avoid steep uphill grades until the flashing stops.

Should the light continues to flash:

1. Move out of the flow of traffic as quickly as possible without impeding other vehicles.
2. Stop, switch off the ignition.
3. Wait at least 10 seconds and switch the ignition on again.

If the light is still flashing, seek the assistance of a workshop.

Brake system

① illuminates red.

Illuminates after the ignition is switched on. The brake fluid level is too low or any other problem with the brake system exists.

Brake fluid level ⇨ 143.

⚠ Warning

Stop. Do not continue your journey. Consult a workshop.

Electrical parking brake

② illuminates or flashes red.

Illuminates

Electrical parking brake is applied ⇨ 114.

Flashes

If ② flashes after the parking brake is released or while driving, do not drive and seek the assistance of a workshop immediately.

Electrical parking brake fault

② illuminates yellow.

Illuminates

Electrical parking brake is operating with degraded performance ⇨ 114.

⚠ Warning

Have the cause of the fault remedied immediately by a workshop.

An error message may be displayed in the Driver Information Centre (DIC).

Driver Information Centre ⇨ 72.

Antilock brake system (ABS)

③ illuminates yellow.

Illuminates for a few seconds after the ignition is switched on. The system is ready for operation when the control indicator goes out.

If the control indicator does not go out after a few seconds, or if it illuminates while driving, there is a fault in the ABS. The brake system remains operational but without ABS regulation.

Try to reset the system.

To reset the system:

1. Move out of the flow of traffic as quickly as possible without impeding other vehicles.
2. Place the vehicle in **P**.
3. Switch the ignition off.
4. Restart the vehicle.

When the ABS control indicator remains on after resetting the system or comes on again while driving, seek the assistance of a workshop.

Antilock brake system ⇨ 114.

Should the warning lights of the ABS and the regular brake system come on, the vehicle may have a problem with the regular and the antilock brakes.

Have the vehicle towed for service.

Towing ⇨ 170.

Sport mode

Sport illuminates when sport mode is selected.

Sport mode ⇨ 109.

Mountain mode

Mountain illuminates when mountain mode is selected.

Mountain mode ⇨ 109.

Hold mode

Hold illuminates when hold mode is selected.

Hold mode ⇨ 109.

Electronic Stability Control off

 illuminates yellow.

The system is deactivated.

Electronic Stability Control and Traction Control system

 illuminates or flashes yellow.

Illuminates

A fault in the system is present. Continued driving is possible. Driving stability, however, may deteriorate depending on road surface conditions.

Have the cause of the fault remedied by a workshop.

Flashes

The system is active and is working to assist the driver with directional control of the vehicle in difficult driving conditions.

Electronic stability control ⇨ 118,
Traction control system ⇨ 117.

Traction Control system off

 illuminates yellow.

The system is deactivated.

Engine coolant temperature

 illuminates red.

Illuminates when the vehicle has a problem with the engine coolant system.

A warning chime sounds when the control indicator comes on.

Caution

If engine coolant temperature is too high, stop vehicle, switch off the ignition. Danger to engine. Check coolant level.

If the control indicator remains on, seek the assistance of your workshop.

Tyre pressure monitoring system

 illuminates or flashes yellow.

Illuminates

One or more of the tyres are significantly underinflated. Stop immediately and check tyre pressure.

Flashes

Fault in system. After about one minute the control indicator illuminates continuously. Seek the assistance of a workshop.

Engine oil pressure

 illuminates red.

Illuminates briefly when the vehicle is started.

Caution

Engine lubrication may be interrupted. This may result in damage to the engine and/or locking of the drive wheels.

1. Move out of the flow of traffic as quickly as possible without impeding other vehicles.
2. Set selector lever to **N**.
3. Switch off the ignition.

Check oil level before seeking assistance of a workshop ➔ 139.

Low fuel

 illuminates when the fuel level is too low.

Immobiliser

 illuminates yellow.

Fault in the immobiliser system. The engine cannot be started.

Seek the assistance of a workshop.

Vehicle ready

 **READY** illuminates whenever the vehicle is ready to be driven.

Exterior light

 illuminates green.

The exterior lights are on ⇨ 88.

High beam

☰ illuminates blue.

Illuminated when high beam is on and during headlight flash ⇨ 89.

Rear fog light

☼ illuminates yellow.

The rear fog light is on ⇨ 90.

Cruise control

☺ illuminates white or green.

Illuminates white

The system is on.

Illuminates green

A certain speed is stored.

Cruise control ⇨ 119.

Door open



If a door, the bonnet or the tailgate is opened, a light comes on.

An additional graphic is shown in the Driver Information Centre (DIC), everytime the bonnet or the tailgate are opened.

Driver Information Centre (DIC)
⇨ 72.

Information displays

Driver Information Centre



The Driver Information Centre (DIC) display is located in the instrument cluster. The DIC displays information about the vehicle. If a system problem is detected, it also displays warning messages.

Vehicle messages ⇨ 83.

DIC controls



CONFIG: Press to select either the simple or enhanced instrument cluster configuration display.

◀ **BACK:** Press to return to the previous screen, to exit a screen or return to the main menu. Press ▶ **BACK** to minimise the DIC menu display.

SELECT: Press the centre of the knob to select the highlighted item. Turn the knob to scroll through the menu items.

Selecting menus and functions

At the main DIC menu:

1. Turn the **SELECT** knob to scroll through the possible DIC menus.
2. Press **SELECT** knob when a menu item is highlighted to enter that menu.
3. Continue to turn and press the **SELECT** knob to scroll through and select the available menu items:

Trip A  and **Trip B** 
 ⇨ 63.

Remaining oil life

The percentage of remaining oil life is displayed.

Engine oil ⇨ 139.

Tyre pressure

The approximate pressures of all four tyres are displayed.

If dashes are displayed instead of values, there may be a problem with the vehicle.

Seek the assistance of a workshop.

Tyre pressure ⇨ 157.

Tyre pressure monitoring system
 ⇨ 157.

Vehicle messages

Turn the **SELECT** knob to scroll through any active warning message. Press **SELECT** to review the messages.

Vehicle messages ⇨ 83.

Unit

Turn the **SELECT** knob to change the unit display between SI and US. Press **SELECT** to confirm the setting.

Tutorial mode

Press **CONFIG** to switch between two tutorial screens that explain some of the features of the cluster.

Tutorial mode is only available when the vehicle is in park position **P**.

Navigation

Arrow guidances are displayed by selecting this item.

See the infotainment system manual for further information.

Instrument cluster display

After unlocking and opening the driver's door, an information display appears, indicating the charge cord status and the charge level of the high voltage battery.



A message may display on the lower left of the screen to indicate that a charging interruption of AC power at the vehicle's charge port has occurred.

Colour-Info-Display

Colour-Info-Display is located in the instrument panel.

Colour-Info-Display indicates:


- Climate control ⇨ 94
- Infotainment system, see description in the infotainment system manual.
- Vehicle personalisation settings
- Power flow information
- Charging settings
- Energy information
- Time ⇨ 61
- Temperature

The Colour-Info-Display controls only need a light touch to operate and work best with bare hands. The controls will work with most gloves although they may take longer to respond. Use the finger pad rather than the finger tip to minimise response time. If the controls are not responding, remove the gloves.



Press until **Power Flow**, **Charging** and **Energy Info** is displayed.

Power Flow screens

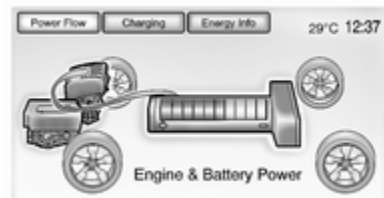


The **Power Flow** screens indicate the current system operating condition. The screens show the energy flow between the engine, electric drive unit and high voltage battery. These components will be highlighted when they are active.

Charging

Charge mode selection

There are three programmable charge modes.

From the charge mode status screen, press **Change Charge Mode**.

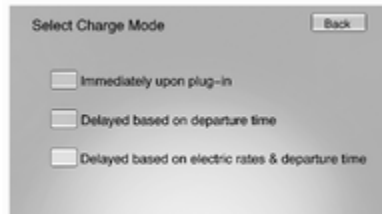

Select one option:

- **Immediately upon plug-in**
- **Delayed based on departure time**
- **Delayed based on electric rates & departure time**

Programmable charging

The current charge mode status can also be viewed in a temporary pop-up in the Colour-Info-Display by pressing the release button of the charge port door on the driver door. The **Charge Start** and **Charge Complete** time estimations are also displayed on the screen. These estimations are most accurate when the vehicle is plugged in and in moderate temperature conditions.

Charge mode status
Immediately:



The vehicle starts charging as soon as it is connected to an electrical outlet.


Charging ⇨ 125.

Delayed (Departure Time):



The vehicle estimates the charging start time considering the programmed departure time for the current day of the week. Charging begins at the start time and is complete by the departure time only if sufficient time is allowed after the charge cord is plugged in.


Delayed (Rate & Departure Time):

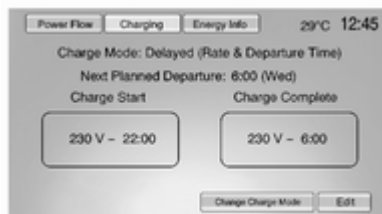

The vehicle estimates the charging start time based on the utility rate schedule, utility rate preference and the programmed departure time for the current day of the week. The vehicle will charge during the least expensive rate periods to achieve a full battery charge by the departure time. Electrical rate information from the utility company for the charging location is required for this mode.

Departure time entry


From the delayed charge mode status screen, press **Edit** to change the departure time for each day of the week.

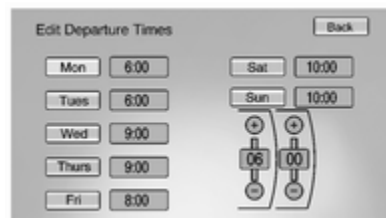

1. Press the day to change.
2. Press **+** or **-** to change the hours and minutes.
3. Press **Back** to store changes and return to the previous screen.

Charge rate selection

From the delayed rate and departure time charge mode status screen, press **Edit**.

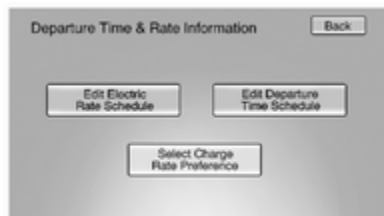


Select one of the following:

- **Edit Electric Rate Schedule**
- **Edit Departure Time Schedule**
- **Select Charge Rate Preference**

Charge rate preference selection

From the **Departure Time & Rate Information** screen, press **Select Charge Rate Preference**.

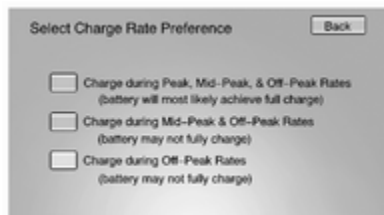

Press one of the following options to select the Charge Rate Preference:

- **Charge during Peak, Mid-Peak, & Off-Peak Rates:** The vehicle can charge during any rate period to satisfy the next planned departure time. However, it will select when to charge to minimise the total cost of the charge.
- **Charge during Mid-Peak & Off-Peak Rates:** The vehicle will charge during off-peak and/or mid-peak rate periods only and will select when to charge to minimise the total cost of the charge.
- **Charge during Off-Peak Rates:** The vehicle will only charge during off-peak rate periods.

Electric rate plan selection

Electric rates can vary depending on time, weekday and season.

Contact the utility company to obtain the rate schedule for your area. The summer and winter start dates must be established to use a summer / winter schedule.

From the **Departure Time & Rate Information** screen, press **Edit Electric Rate Schedule**.



Two electric rate plans are selectable: **Summer/Winter Schedule** or **Yearly Schedule**. To edit:

1. Press **Summer/Winter Schedule** or **Yearly Schedule**.
2. Press **Edit**.

Summer/Winter schedule start date entering

From the **Select Electric Rate Plan** screen, press **Summer/Winter Schedule** then press **Edit**.



1. Press **Summer Start**.
2. Press **+** or **-** to set the month and day for the start of summer.
3. Press **Winter Start**.
4. Press **+** or **-** to set the month and day for the start of winter.
5. Press **Edit Summer Schedule** or **Edit Winter Schedule** to edit the daily electric rate schedule.

Electric rate schedule editing

From the **Enter Summer/Winter Start Dates** screen, press **Edit Summer Schedule** or **Edit Winter Schedule**.

From the **Select Electric Rate Plan** screen, press **Yearly Schedule** and then press **Edit**.




1. Press **Weekday** or **Weekend**.
2. Press **Edit** next to the row to be changed.
 - ♦ Weekdays are Monday to Friday and use the same rate schedule.
 - ♦ Weekends are Saturday and Sunday and use the same rate schedule.

Both weekday and weekend schedules must be set. The rate schedule only applies for a 24 hour period, starting at 0:00 and ending at 0:00. There can be five rate changes for each day; not all must be used.

The finish times must be consecutive. If a finish time does not follow a start time, an error message displays. Follow the instructions given by the message.

Electric rate finish time editing

From the respective electric rate schedule screen, press **Edit** next to the row to change.

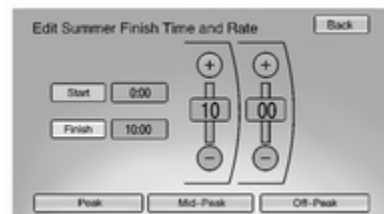


1. Press **+** or **-** to adjust the time.
2. Press **Peak**, **Mid-Peak** or **Off-Peak** to select the electric rate.
3. Press **Back** to store changes.

Only the finish time can be edited. The start time is automatically populated in the rate table.

Electric rate schedule viewing

From the **Select Electric Rate Plan** screen, press either **View Summer Schedule**, **View Winter Schedule** or **View Yearly Schedule**.

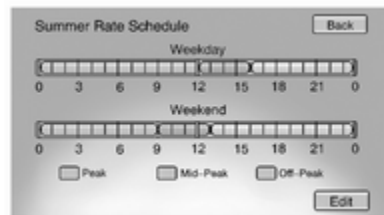

Temporary charge mode override and cancel

Programmed delayed charge modes can be temporarily overridden to an Immediate charge mode for one charge cycle. Also, the next planned departure time can be temporarily overridden for one charge cycle. In addition to the in-vehicle overrides via the Colour-Info-Display, there are also other ways to temporarily override a delayed charge mode.


Charging ⇨ 125.

To temporarily override a delayed charge mode to immediate charge mode from inside the vehicle:

1. Press the release button of the charge port door on the driver door to view the charge mode status pop-up in the Colour-Info-Display.



2. Press **Temporary Override**.

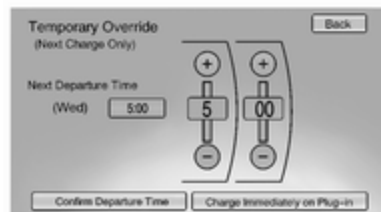

3. Press **Charge Immediately on Plug-in** to temporarily override an immediate charge mode.

The revised charge complete time will be automatically displayed.






To cancel the temporary override to immediate, press **Cancel Temporary Charge Mode**.

To temporarily override the next planned departure time from inside the vehicle:

1. Press the release button of the charge port door on the driver door to view the charge mode status pop-up in the Colour-Info-Display.

2. Press **Temporary Override**.

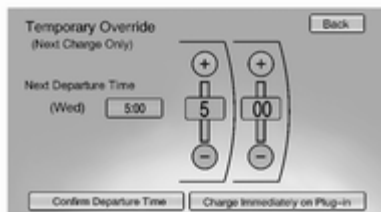

3. Press the **+** or **-** button to change the next departure time.
4. Press **Confirm Departure Time** to temporarily override the next planned departure time.

The revised charge complete time will be automatically displayed in the temporary charge mode screen.

Temporary departure time can only be updated for the same day as the original next planned departure time. Also, the vehicle will not accept a temporary departure time that is before the present time of day.



To cancel the temporary override of the next planned departure time, press **Cancel Temporary Departure Time** on the bottom of the touch screen of the of the touch screen of the temporary charge mode screen or pop-up, respectively.


Charging override / interruption pop-up



A pop-up will appear if the following occur:

- There was an unintended loss of AC power during the plug-in charge event. For example, there was a power outage or the charge cord was unplugged from the wall.

Programmable charging disabled

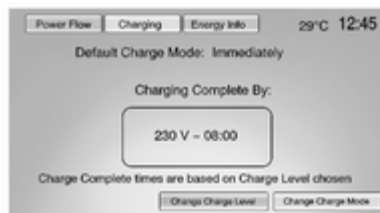


When the programmable charging system is disabled, the screen and the pop-up of the default charge mode status will display -:-:- for the charge complete time. The programmable charging system will be disabled if the charge complete time cannot be confidently estimated.

If the programmable charging system is consistently disabled, seek the assistance of a workshop.

Energy information


To view the **Energy Usage**, **Energy Efficiency** and **Efficiency Tips**, press  on the instrument panel and then press **Energy Info**.

Energy Usage

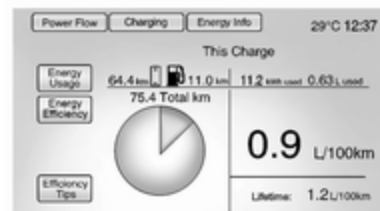

This screen displays information for the total of all the drive cycles since the last time the high voltage battery was fully charged. This includes distance travelled in electric mode, distance travelled in extended range mode, total distance travelled, electric energy used from the battery, total fuel used and average fuel economy.

There are maximum limits to some of the values that can be displayed. When these values are replaced with dashes, the value limits have been reached. To reset these values, the high voltage battery will need to be fully recharged. The circle graph also represents the percentage of distance travelled using electric mode versus extended range mode. The lifetime fuel economy is a total over the life of the vehicle and can only be reset by a workshop.

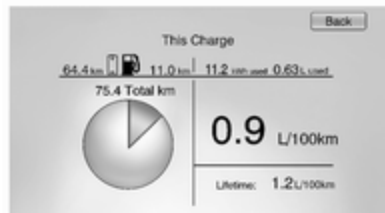

Energy usage information will also appear automatically on power off when the retained power off is active. This automatic pop-up can be disabled through the vehicle personalisation.

Vehicle personalisation ⇨ 83.

Energy efficiency



This screen is accessed by pressing **Energy Efficiency** on the **Energy Info** screen. This screen displays the energy efficiency over the drive cycle based on driving style and climate settings. Driving in a more efficient manner will result in a higher percentage displayed for driving style. Minimising the use of the climate control system will result in a higher percentage displayed for climate setting.

Efficiency Tips



This screen is accessed by pressing **Efficiency Tips** from the **Energy Info** screen. This screen provides a guide on how to improve energy usage to increase fuel economy and range.

Vehicle messages

Messages displayed in the Driver Information Centre (DIC) indicate the status of the vehicle or some action that may be needed to correct a condition. Multiple messages may display one after the other.

Messages that do not require immediate action can be acknowledged and cleared by pressing the **SELECT** knob. The messages requiring immediate action cannot be cleared until that action is performed. All messages should be taken seriously.

Follow the instructions given in the messages.

The system displays messages regarding the following topics:

- Fluid levels
- Starting
- Maintenance
- Anti-theft alarm system
- Brakes
- Ride control systems

- Cruise control
- Object detection systems
- Lighting, bulb replacement
- Wiper/washer system
- Doors, windows
- Radio remote control
- Airbag systems
- Engine and electric drive unit
- Tyres
- Battery and charging
- Vehicle operation modes
- Speed limit

Vehicle personalisation

Vehicle Personalisation can be accessed by using either the infotainment controls or the touch screen in the Colour-Info-Display. See the separate infotainment manual for more information.

Using the infotainment controls

Use the **TUNE/MENU** knob, the **CONFIG** and the **←BACK** buttons on the instrument panel to select personalisation features.

- **CONFIG:** Press to scroll through the available menus across the top of the touch screen display.
- **TUNE/MENU:**
 - ◆ Press to enter, select or activate a highlighted menu option.
 - ◆ Turn to highlight a menu option.
 - ◆ Press to turn a system setting on or off.
- **←BACK:**
 - ◆ Press to exit a menu.
 - ◆ Press to return to a previous screen.

Submenus

An arrow on the right-hand edge of the menu indicates that it has a submenu with other options.

Selecting a menu option

1. Turn the **TUNE/MENU** knob to highlight the function.
2. Press the **TUNE/MENU** knob to select the highlighted option. A checkmark next to the option indicates the selected option.

Turning a function on or off

1. Turn the **TUNE/MENU** knob to highlight the function.
2. Press the **TUNE/MENU** knob to turn the function on or off. A checkmark next to the function indicates that the function is on.

Using the touch screen

Use the touch screen icons and menus on the Colour-Info-Display to select personalisation features.

△ = Touch to scroll up.

▽ = Touch to scroll down.

Back: Touch **Back** in the upper right corner of the display to return to the previous menu.

Submenus

An arrow on the right-hand edge of the menu indicates that it has a submenu with other options.

Selecting a menu option


Touch any of the available menu options on the touch screen to select the option. A checkmark next to the option indicates the selected option.

Turning a function on or off

Touch the screen where the available function is listed to turn it on or off. A checkmark next to the function indicates that the function is on.

Entering the personalisation menu

Press vehicle menu on the touch screen.

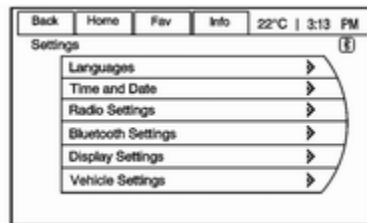

The vehicle menu features may include:

- **Climate and air quality**
- **Comfort & Convenience**
- **Languages**
- **Exterior ambient lighting**
- **Power door locks**
- **Remote Lock / Unlock / Start**
- **Restore factory settings**

Climate and air quality

Select the **Climate and air quality** menu to display:

- **Auto fan speed**
- **Auto heated seats**
- **Auto demist**

Auto fan speed

Auto fan speed sets the automatic fan speed to maintain the desired interior temperature. Choose a blower setting:

High: Increased speed.

Medium: Moderate speed.

Low: Reduced speed.

Auto heated seats

When enabled, the auto heated seat button on the touch screen will be highlighted. This feature will automatically activate heated seats at the level required by the interior temperature. **Auto heated seats** can be turned off by using the heated seat buttons on the instrument panel.

Auto demist

When on and high humidity is detected, the climate control system will adjust the outside air, air conditioning or heat to decrease fogging. The fan speed may increase. When high humidity is no longer detected, the system will return to previous operation.

Comfort & Convenience

Select the **Comfort & Convenience** menu and the following will be displayed:

- **Chime volume**
- **Button Chime**
- **Energy Summary Exit Pop-up**
- **Personalization by driver**

- **Charging Cord Theft Alert**
- **Charging Power Loss Alert**

Chime volume

This setting allows the selection of the chime volume level to be either normal or high.

Button Chime

This setting allows a tone to be heard when a selection is made using the infotainment system.

Energy Summary Exit Pop-up

This setting allows the **Energy Summary Exit Pop-up** to be turned on or off.

Personalization by driver

This setting allows the radio to store favourites by driver.

Charging Cord Theft Alert

This setting allows the **Charging Cord Theft Alert** to be turned on or off.

Charging Power Loss Alert

This setting allows the **Charging Power Loss Alert** to be turned on or off.

Languages

This setting allows the selection of the desired language.

Exterior ambient lighting

Select the lighting menu and the following will be displayed:

- Duration upon exit of vehicle
- Exterior lighting by unlocking

Duration upon exit of vehicle

This setting allows the selection of how long the exterior low beam stays on when leaving the vehicle and it is dark outside.

The available options are:

- Off
- 30 seconds
- 1 minute
- 2 minutes

Exterior lighting by unlocking

This setting allows the vehicle locator lights to be turned on or off. When on, the low beam, sidelights, tail lights,

number plate lights and reversing lights will illuminate when  is pressed on the radio remote control.

Power door locks

Select **Power door locks** and the following will be displayed:

- Auto door unlock
- Auto door lock
- Prevent doorlock while door open

Auto door unlock

This setting allows selection of which doors will automatically unlock when the shift lever is set into **P**.

The available options are:

- All doors
- Driver door
- Off

Auto door lock

This setting allows selection if doors will automatically lock when the shift lever is set into **D**.

Prevent doorlock while door open

When on, this setting will keep the driver's door from locking until the door is closed. If this feature is turned on, the **Delayed door lock** menu will not be available.

Remote locking, unlocking, starting

Select **Remote Lock / Unlock / Start** and the following will be displayed:

- Exterior lighting by unlocking
- Door Unlock
- Passive door unlock
- Passive door lock
- Remote left in vehicle reminder

Exterior lighting by unlocking

When on, the exterior lights will flash when unlocking the vehicle with the radio remote control.

Door Unlock

This setting allows the selection of which doors will unlock when pressing  on the radio remote control.

The available options are:

- **All doors**
- **Driver door**

If **All doors** is selected, all doors will be unlocked.

If **Driver door** is selected, only the driver's door will be unlocked on the first press of . All doors will be unlocked on the second press of  within five seconds of the prior press.

Passive door unlock

This setting allows the selection of which doors are unlocked by pressing the button on the outside door handle.

The available options are:

- **All doors**
- **Driver door**

Passive door lock

This setting allows passive locking to be turned on or off and select what type of feedback.

The available options are:

- **Off**
- **On**
- **ON with Active Chirp**

Remote left in vehicle reminder

When on, the horn will chirp rapidly three times if a radio remote control is left in the vehicle.

Restore factory settings


This setting returns all of the vehicle personalisation settings to the factory settings.

Lighting

Exterior lighting	88
Interior lighting	91
Lighting features	92

Exterior lighting

Light switch

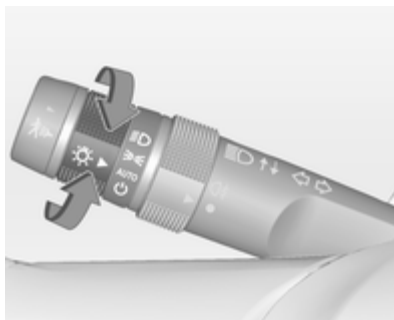

Turn adjuster wheel:

- AUTO** = automatic light control: exterior lighting is switched on and off automatically depending on external lighting conditions.
-  = activation or deactivation of the automatic light control. Switch turns back to **AUTO**.
-  = sidelights
-  = low beam

Tail lights

Tail lights are illuminated together with the low beam and the sidelights.

Automatic light control

Automatic light control function

When the automatic light control function is switched on and the ignition is switched on, the system switches between daytime running light and low beam depending on the lighting conditions.

Daytime running light

Daytime running light increases visibility of the vehicle during daylight.

While the daytime running light is active, the tail lights and the sidelights are switched off.

If the ignition is switched on and the vehicle is stopped, the daytime running light can be turned off by moving the shift lever to **P**. The daytime running light will stay off until the shift lever is moved out of **P**. Please regard that the low beam should be turned on when needed.

Notice


Do not cover the light sensor otherwise the AUTO mode will not operate properly.

Automatic low beam activation

During poor lighting conditions, the low beam is switched on.

Tunnel detection

When a tunnel is entered, the low beam is switched on.

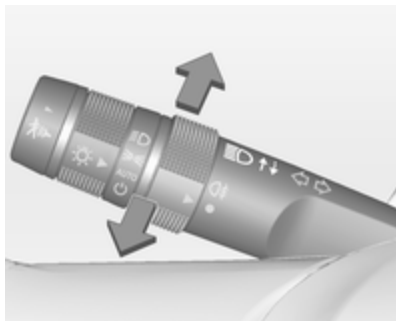High beam

To switch from low to high beam, push the turn signal lever.

To switch to low beam, push lever again or pull.

Headlight flash

To activate the headlight flash, pull the turn signal lever.

Headlight range adjustment

To adapt headlight range to the vehicle load to prevent dazzling: turn thumb wheel  to required position.

- 0 = front seats occupied
- 1 = all seats occupied


- 2 = all seats occupied and load compartment laden
- 3 = driver's seat occupied and load compartment laden

Hazard warning flashers

Operated with the  button.

In the event of an accident with airbag deployment, the hazard warning flashers are activated automatically.

Turn and lane-change signals

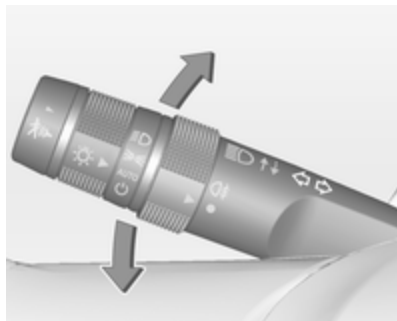

lever up = right turn signal
lever down = left turn signal


If the lever is moved past the resistance point, the turn signal is switched on constantly. When the steering wheel moves back, the turn signal is automatically deactivated.

For three flashes, e.g. when changing lanes, press the lever until resistance is felt and then release.

Switch the turn signal off manually by moving the lever to its original position.

Turn signal control indicator ↗ 67.

Rear fog lights

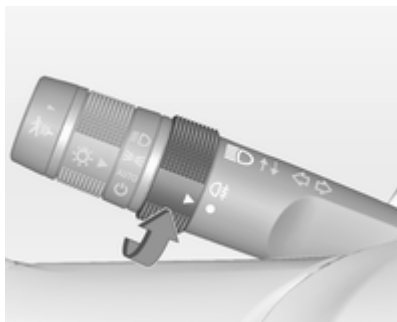

Turn the rear fog light band on the lever to  and release it, to turn the rear fog light on or off. The band will return to its original position.

The rear fog light is automatically set to off each time the car is started.

Head- and sidelights must be on for the rear fog lamp to work.

Parking lights

When the ignition is switched off, the parking lights on one side can be activated:

1. Switch off the vehicle.
2. Move turn signal lever all the way up (right parking lights) or down (left parking lights).

Confirmed by a signal and the corresponding turn signal control indicator.

The parking lights will remain illuminated until the ignition is switched on or the turn signal lever is returned to the neutral position.

Reversing lights

The reversing lights come on when the ignition is switched on and reverse gear is selected.

Electric drive unit ↗ 112.

Misted light covers

The inside of the light housing may mist up briefly in poor, wet and cold weather conditions, in heavy rain or after washing. The mist disappears quickly by itself; to help switch on the low beam.

Interior lighting

Instrument panel illumination control



Brightness of the following lights can be adjusted when the exterior lights are on:

- Instrument panel cluster display
- Infotainment display
- Illuminated switches and operation elements

Turn thumb wheel  up or down to brighten or dim the lights.

Dome lights



To operate, press the following buttons:

-  = automatic switching on and off
-  = on
-  = off

Reading lights

There are front and rear reading lights.

The reading lights are operated with  and  for the respective light.

Front reading lights



The front reading lights are located in the overhead console.

Rear reading lights



The rear reading lights are located in the headliner.

Lighting features

Entry lighting

Low beam, reversing lights and the interior lights turn on briefly by pressing  on the radio remote control.

The lights turn off immediately when the  button is pressed or automatically after a brief period.

Exit lighting

The low beam and the reversing lights come on by doing the following:

1. Switch off ignition.
2. Open the driver's door.
3. Pull the turn signal lever briefly and release.

Some interior lights come on when the ignition is switched off. The exterior and the interior lights remain on after the door is closed for a brief period and then turn off.

Activation, deactivation and duration of this function can be changed in the Colour-Info-Display.

Vehicle personalisation ➞ 83.

Battery discharge protection

The battery saver feature is designed to protect the vehicle's 12 volt battery.

If any interior light is left on and the ignition is switched off, the battery rundown protection system automatically turns the lights off after about 10 minutes.

If the exterior lights are left on, they turn off when the ignition is switched off. If the sidelights are switched on when the ignition is switched off, the sidelights remain on until they are manually turned off.

Climate control

Climate control systems	94
Air vents	101
Maintenance	102

Climate control systems

Automatic climate control system

Notice

Do not cover the sensor located on top of the instrument panel, otherwise the automatic climate control system may not work properly.

Climate control touch screen



The climate mode, fan, air delivery, recirculation and auto heated seats are controlled by pressing the

CLIMATE button on the instrument panel and viewing information in the Colour-Info-Display.

Climate mode operation



Three different climate mode settings can be selected. These settings adjust the impact the climate control system has on the vehicle's electric range or fuel economy.

To select a climate mode:

1. Press **CLIMATE** on the instrument panel.
2. Press the respective climate mode button the touch screen.
The climate mode will be lit.

Climate modes

MIN mode

The air conditioning and electric heat are turned off. As long as  is not selected, the climate control settings may not have a noticeable effect on the vehicle electric range and fuel economy.

When in **MIN**  mode, the **AUTO** indicator light will be off. When **AUTO** is selected in **Min**  mode, the mode will change to either **ECO**  or **MAX** .

When in **MIN**  mode, the air conditioning system may turn on automatically if the high voltage battery is being cooled. The climate control system could blow cold air. This is normal. To prevent cold air from blowing into the interior, turn off

the fan control and select the vent mode and manual recirculation mode, and close the air vents.

When in **MIN**  mode, if automatic defog is enabled, the air conditioning and electric heat may turn on when high humidity conditions exist.

Vehicle personalisation ⇨ 83.

The air conditioning may also run if  is selected.

ECO mode

The air conditioning and electric heat are controlled to balance comfort with fuel economy.

As long as  is not selected, the vehicle electric range or fuel economy will decrease less than in **MAX**  mode, but will result in moderate comfort.

MAX mode

The air conditioning and electric heat are controlled to reach the best comfort level based on the temperature setting selected. In this mode, vehicle electric range or fuel

economy will decrease depending on the amount of energy required to reach the best comfort levels.

Climate power gauge



When the climate mode is changed, the climate power gauge displays the impact that the changes have on energy use. The higher the reading, the more energy is being used.

Air conditioning / Heat status indicators



The air conditioning or heat status indicator displays when the air conditioning or electric heat is being used.

Air conditioning / Electric heating

Air conditioning and electric heating could be on at the same time when dehumidifying is required in **ECO**  or **MAX**  modes.

In **MIN**  mode, occasionally air conditioning and/or heating status will be on if the auto defog function is enabled and high humidity is detected.

Vehicle personalisation ⇄ 83.

Air conditioning may also run if  is selected, regardless of the climate mode.

Automatic operation

The system automatically controls the fan speed, air delivery mode and recirculation to heat or cool the vehicle to the selected temperature.

It is also possible to preset three fan speeds in the vehicle personalisation.

Vehicle personalisation ⇄ 83.

When the **AUTO** indicator light is on, the system is in full automatic operation. If the air delivery mode, fan speed or recirculation setting is adjusted, the **AUTO** indicator turns off and the selected settings display.

For automatic operation:



1. Press **AUTO**.



2. Set the temperature to the desired value. An initial setting of 23° C is recommended.

Temperature control



Press ▲ or ▼ to increase or decrease the temperature.

Auto defog

The system monitors high humidity inside the vehicle. When detected, the system may adjust to outside air supply and turn on the air conditioning or the heater. The fan speed may slightly increase to help prevent fogging. When high humidity is no longer detected, the system will return to its prior operation.

Vehicle personalisation ⇨ 83.

Manual operation

Fan control



Press the fan control buttons  on the instrument panel or the touch screen fan control, to increase or decrease the fan speed.



The fan speed setting is displayed. Press **AUTO** to return to automatic operation. To turn the fan or climate control system off, press the fan down button repeatedly.

If the fan is manually turned off while in **ECO**  or **MAX**  mode, the display will automatically change to **MIN**  mode. When the fan is turned back on either by manually increasing fan speed or pressing the **AUTO** button, the climate mode will revert back to **ECO**  or **MAX**  mode.

Air delivery mode control

Press **CLIMATE** on the instrument panel to select the climate touch screen.



Press the air delivery mode button on the touch screen to change the direction of the airflow. The selected air delivery mode button is lit. Pressing any of the air delivery buttons cancels automatic air delivery control and the direction of the airflow can be controlled manually. Press **AUTO** to return to automatic operation.

To change the current mode, select one of the following:

: to head via adjustable air vents

: to head and to foot well

: to floor well

: to windscreen and front door windows

: Air is directed to the windscreen. The windscreen is cleared of fog or frost more quickly.



Selecting will disable automatic control and the **AUTO** button indicator will not be lit.

Select again to return to the previous climate settings.

If is selected in **MIN** or **ECO** mode, air conditioning or electric heating may turn on and have a noticeable effect on vehicle electric range and fuel economy.

Auto recirculation

Warning

The exchange of fresh air is reduced in air recirculation mode. In operation without cooling the air humidity increases, so the windows may mist up from inside. The quality of the passenger compartment air deteriorates, which may cause the vehicle occupants to feel drowsy.



Press **AUTO**  to allow the system to automatically choose the air supply mode for best comfort, efficiency and defogging. Air is recirculated or outside air is pulled into the vehicle. The touch screen button is lit.

Manual recirculation



Press  to recirculate air inside the vehicle, press it again to select outside air. When selected, the touch screen button lights up to indicate that air is being recirculated. This helps to quickly cool the air inside the vehicle or prevent outside air and odours from entering.

Pressing  cancels automatic recirculation. Press **AUTO** or **AUTO**  to return to automatic operation; recirculation runs automatically as needed.

Manual recirculation mode is not available when defrosting or defogging is selected.

Auto heated seats



Press  **AUTO** on the touch screen. The button colour will change to green to confirm the setting. By switching on the ignition, **AUTO** heated seats will automatically activate the heated seats at the level required by the vehicle's interior temperature. The LEDs next to the seat heating symbol on the instrument panel indicates the heat setting. Use the touch screen buttons

or the manual heated seat buttons on the instrument panel to turn auto heated seats off.

Heated seats ⇨ 37.

Manual heated seats



Press  for the respective seat with the ignition on to operate the seat heating.

The controls are located on the instrument panel.

Heated seats ⇨ 37.

Heated rear window



Operated by pressing the  button.

Heated rear window ⇨ 33.

Heated rearview mirror ⇨ 30.

Passenger compartment preconditioning



Operated by pressing  on the radio remote control.

The climate control system will default to an appropriate heating or cooling mode and the rear window heating turns on in the event of cold outside temperatures.

Passenger compartment preconditioning ⇨ 21.

Compressor

The vehicle has an electric powered air conditioning compressor. This allows for continuous air conditioning and/or high voltage battery cooling operation, without running the engine.

Air vents



To open the vent, turn the adjuster wheel to ☰. Adjust the air amount at the vent outlet by turning the adjuster wheel.



Direct the flow of air by tilting and swivelling the slats.


To close the vent, turn the adjuster wheel to ☒.

Warning

Do not attach any objects to the slats of the air vents. Risk of damage and injury in case of an accident.

Maintenance

Air intake

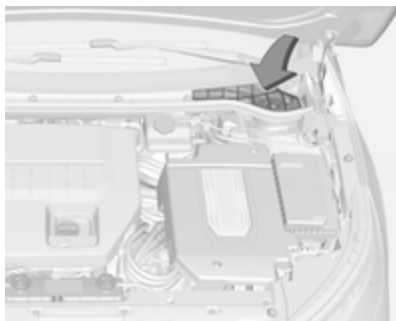

The air intake in front of the windscreen in the engine compartment must be kept clear to allow air intake. Remove any leaves, dirt or snow.

Pollen filter

The pollen filter cleans dust, soot, pollen and spores from the air entering the vehicle through the air intake.

Service

For optimal cooling performance, it is recommended to annually check the climate control system, starting three years after initial vehicle registration, including:

- Functionality and pressure test
- Heating functionality
- Leakage check
- Cleaning of condenser and evaporator drainage
- Performance check

Driving and operating

Driving hints	103
Starting and operating	104
Electric vehicle operation modes	108
Engine exhaust	112
Electric drive unit	112
Brakes	114
Ride control systems	117
Driver assistance systems	119
Charging	125
Fuel	133
Towing	136

Driving hints

Driving economically

Use the following tips to help maximise energy efficiency and range.

Driving style

Avoid unnecessary rapid accelerations and decelerations.

Electric range is maximised at 50 mph and below. Higher speeds use more energy and can significantly reduce electric range.

Use cruise control when appropriate.

Do not shift to **N** to coast. The vehicle recovers energy while coasting and braking in **D** or **L**.

Efficiency gauge in the instrument cluster

The ball indicator should be kept green and in the centre of the gauge.

Inefficient acceleration is indicated when the ball turns yellow and travels above the centre of the gauge.

Aggressive braking is indicated when the ball turns yellow and travels below the centre of the gauge.

Drive mode and gear mode selection

Use normal mode when possible.

Sport mode provides more responsive acceleration than normal mode but can reduce efficiency.

Use mountain mode prior to climbing long, steep grades in mountainous areas. Be sure to engage mountain mode before starting to climb.

Mountain mode reduces electric range and power but may be needed to maintain speeds above 60 mph when climbing grades of 5 % or greater.

Use **L** in heavy stop-and-go traffic or when travelling downhill. **L** requires less brake pedal application and provides a controlled, efficient way to slow the vehicle down.

Vehicle charging / maintenance

Charging

Keep the vehicle plugged in, even when fully charged, to keep the battery temperature ready for the next drive. This is important when outside temperatures are extremely hot or cold.

Maintenance

Always keep the tyres properly inflated and the vehicle properly aligned.

The weight of excess cargo in the vehicle affects efficiency and range. Avoid carrying more than is needed.

If fuel is not regularly used, consider keeping the fuel tank only one-third full. Excess fuel weight impacts efficiency and range.

Avoid unnecessary use of electrical accessories. Power used for functions other than propelling the vehicle will reduce electric vehicle range.

Using a rooftop carrier will reduce efficiency due to additional weight and drag.

Control of the vehicle

Pedals

To ensure the pedal travel is uninhibited, there must be no mats in the area of the pedals.

Starting and operating

New vehicle running-in

The vehicle does not require a running-in period.

Power button



The vehicle has an electronic push-button start. The  button light flashes when the driver's door is open and the ignition is not on. The flashing light will eventually time out. The  button light is on steady when the

ignition is on. When the ignition is switched off, the  button light will also turn off.¹⁾

The radio remote control must be in the vehicle for the system to operate. If the vehicle will not start, place the mechanical key of the radio remote control inside the transmitter slot located in the instrument panel storage compartment.

Starting and stopping the vehicle
⇨ 106.

Switch on ignition

With the ignition off and the brake pedal applied, press  once to switch on the ignition. When the  **READY** light is on in the instrument cluster, the vehicle is ready to be driven. This could take up to 15 seconds at extremely cold temperatures. The engine will only start if needed. If the vehicle did not start, the instrument cluster will display a screen with inactive fuel and battery gauges.

Vehicle ready light ⇨ 71.

Starting and stopping the vehicle
⇨ 106.

Ignition off

To switch the ignition off, push button  with the vehicle in **P**. Retained power off will remain active until the driver's door is opened. When switching off the ignition, if the vehicle is not in **P**, the vehicle is not ready to be driven, but some of the electrical features of the vehicle can be used. A message will appear in the Driver Information Centre (DIC).

Retained power off ⇨ 105.

Electric drive unit ⇨ 112.

The vehicle has an electric steering column lock. The lock is activated when the ignition is switched off and either front door is opened. A sound may be heard as the lock actuates or releases. The steering column lock may not release with the wheels turned off centre. If this happens, the vehicle may not start. Move the steering wheel from left to right while

attempting to start the vehicle. If this does not work, seek the assistance of a workshop.

If the vehicle must be shut off in an emergency:

1. Brake using a firm and steady pressure. Do not pump the brakes repeatedly. This may deplete power assist, requiring increased brake pedal force.
2. Shift the vehicle to **N**. This can be done while the vehicle is moving. After shifting to **N**, firmly apply the brakes and steer the vehicle to a safe location.
3. Come to a complete stop, shift to **P** and switch the ignition off by pushing button .
4. Set the parking brake ⇨ 114.

Retained power off

The following electronic systems can work until the driver's door is opened or at the latest for 10 minutes after the ignition is switched off:

¹⁾ Please regard that the operating condition of the vehicle is meant when "ignition on/off" is used.

- Power windows
- Audio system
- Power outlets

Starting and stopping the vehicle

Starting

Move the shift lever to **P** or **N**. The propulsion system will not start in any other position.

Notice

Do not try to shift to **P** if the vehicle is moving as the electric drive unit could be damaged. Shift to **P** only when the vehicle is stopped.

The radio remote control must be in the vehicle. Press the brake pedal and push . If the radio remote control is not in the vehicle or something is interfering with the transmitter, a message displays in the Driver Information Centre (DIC).

Radio remote control ⇨ 21.



A welcome, ready, and goodbye audio message will be heard in the vehicle and animated on the instrument cluster when opening the driver's door upon entry, when the vehicle is ready to be driven and when the ignition is switched off. The instrument cluster displays an active fuel or battery gauge, along with an audio start-up cue, when the vehicle is ready to be driven.

Starting the vehicle with a low radio remote control battery

If the vehicle will not start due to a low radio remote control battery, a message displays in the DIC.

However, the vehicle can still be driven. Therefore proceed as follows:

1. Open the instrument panel storage and remove the rubber mat.



2. Extend the key blade and place the blade into the slot.
3. With the vehicle in **P** or **N**, apply the brake pedal and press  on the instrument panel.

Replace the radio remote control battery as soon as possible.

Battery replacement ⇨ 21.

Starting the vehicle at low temperatures

It is recommended to switch on the ignition while the vehicle is plugged in when exterior temperatures are below 0° C.

Should the exterior temperatures be lower than -32° C, the vehicle has to be plugged in when the ignition is switched on.

Restarting

If the vehicle must be restarted while it is still moving, move the shift lever to **N** and press  twice without pressing the brake pedal. The propulsion system will not restart in any other position.

Computers determine when the engine needs to run. The engine may start, if required, when the propulsion system is on.

Electric mode  108.

A chime will sound if the driver's door is opened while the ignition is switched on. Always press  to switch the ignition off before exiting.

Stopping

Power button  104.

Parking

Notice

Do not allow the vehicle to remain in extreme temperatures for long periods without being driven or being plugged in.

- Do not park the vehicle on an easily ignitable surface. Things that can burn could touch hot exhaust parts under the vehicle and ignite.
- Always apply the parking brake. Pull switch .
- Switch off the ignition. Turn the steering wheel until the steering wheel lock engages.
- If the vehicle is on a level surface or uphill slope, apply the parking brake and then shift the selector lever to **P** before switching off the ignition. On an uphill slope, turn the front wheels away from the kerb.

If the vehicle is on a downhill slope, apply the parking brake and then

shift the selector lever to **P** before switching off the ignition. Turn the front wheels towards the kerb.

- Lock the vehicle and activate the anti-theft alarm system.

Electric vehicle operation modes

Operation

This vehicle is an extended range electric vehicle. It uses an electric propulsion system to drive the vehicle at all times. Electricity is the vehicle's primary source of energy, while petrol is the secondary source.

The vehicle has two modes of operation: Electric and extended range. In both modes, the vehicle is propelled by its electric drive unit. It converts electrical energy into mechanical energy to drive the wheels. The vehicle's performance remains the same in either mode. Depending on the selected operation mode, a battery or a fuel gauge is shown mainly in the instrument cluster.

Battery gauge ⇨ 64.

Fuel gauge ⇨ 64.

Electric mode

In electric mode the vehicle does not use fuel or produce emissions. During this primary mode, the vehicle is powered by electrical energy stored in the high voltage battery. The vehicle can operate in this mode until the battery has reached a low charge.

There are some conditions when the battery charge is high enough to provide electric mode operation, but the engine still runs. They are:

- Cold ambient temperatures.
- Hot or cold high voltage battery temperatures.
- The bonnet being open or not completely closed and latched.
- Certain high voltage battery fault conditions.
- Engine maintenance mode or fuel maintenance mode being run.

Extended range mode

When the vehicle reaches the end of its electric range, it switches to extended range mode. In this

secondary mode, electricity is produced by the fuel-powered engine. This secondary source of electric power extends the vehicle range. Operation will continue in extended range mode until the vehicle can be plugged in to recharge the high voltage battery and restore electric mode.

The high voltage battery will continue to provide some power and work together with the engine to provide peak performance when it is required, such as driving up a steep incline or for high acceleration manoeuvres. The battery will not be charged nor will electric vehicle range be restored by the engine.

In either electric mode or extended range mode, if there is a high voltage battery fault, the engine may run without turning off to generate the required electricity. The malfunction indicator light will turn on.

Malfunction indicator light ⇨ 68.

Drive modes

While driving in electric or extended range mode, additional operating modes can be selected.



Press **DRIVE MODE** as often as the desired drive mode is highlighted in the Driver Information Centre (DIC).



After three seconds, the new drive mode will become active.

At next start, the vehicle will default to **Normal** mode.

During some conditions, certain drive modes may be unavailable. The unavailable mode is greyed out in the DIC menu and cannot be selected.

If in **Sport**, **Mountain** or **Hold** mode, the mode may become unavailable and the vehicle will return to **Normal** mode. The indicator light goes off and a DIC message displays.

Driver Information Centre (DIC) ⇨ 72.

Sport mode

Sport mode provides more responsive acceleration than **Normal** mode, but can reduce efficiency. Use **Normal** mode whenever possible.

Control indicator **Sport** ⇨ 70.

Mountain mode

Mountain mode should be selected at the beginning of a trip before climbing steep, uphill grades and when expecting to drive in very hilly or mountainous terrain. This mode maintains a reserve electrical charge of the high voltage battery to provide better grade climbing performance. While driving in **Mountain** mode, the vehicle will have less responsive acceleration. **Mountain** mode will not change normal vehicle braking performance for steep downhill grades.

If steep hill driving is expected, it is recommended to select **Mountain** mode at least 20 minutes before driving on steep grades. This will allow the vehicle time to build a sufficient battery charge reserve.

If **Mountain** mode is not selected for these conditions, propulsion power may be reduced and the engine speed may increase.

Control indicator **Mountain** ⇨ 70.

Hold mode

Hold mode is only available when the vehicle is in electric mode. This mode places the remaining battery charge into a reserve for the driver to use as desired. Selecting this mode transitions the vehicle to extended range mode to maintain the battery charge reserve.

Hold mode will not change normal vehicle acceleration or braking performance.


Control indicator **Hold** ⇨ 70.

Maintenance modes

Engine maintenance mode

Engine maintenance mode runs the engine to keep it in good working condition after approximately six weeks of no or very limited engine operation. Engine maintenance mode

will force the engine to run, even if there is a charge to power the vehicle. When engine maintenance mode is needed, a request screen appears on the Colour-Info-Display at vehicle start.

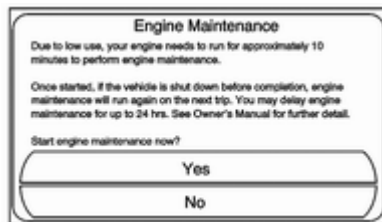


If **Yes** is selected, engine maintenance mode will begin. The engine will run for a set amount of time without turning off. During engine maintenance mode, a DIC message displays to show the engine maintenance mode percentage complete.

If **No** is selected, the engine maintenance mode request screen will appear when the vehicle is next

started. The engine maintenance mode request can be delayed for only one day.


If the engine maintenance mode request was delayed for one day, it will automatically start the engine at the next vehicle start. An engine maintenance mode notification screen will appear in the Colour-Info-Display.

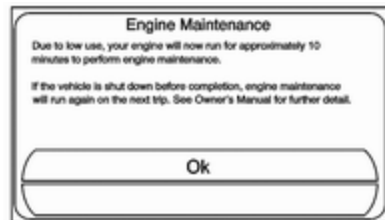

If the vehicle shuts off during engine maintenance mode, it will restart the next time the vehicle is driven. A message displays to indicate that engine maintenance mode is active.

If engine maintenance mode is required and the fuel level is low, engine maintenance mode may eventually empty the fuel tank if fuel

is not added. This will result in reduced, or no power. An adequate fuel level must be maintained in the vehicle to keep it operational.

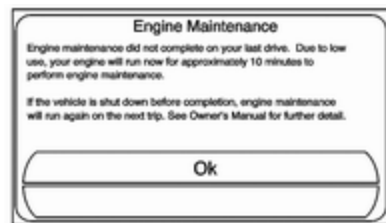


Driver Information Centre (DIC) ⇨ 72.

Fuel maintenance mode

Fuel maintenance mode tracks average fuel age. Old fuel can cause engine problems. If low engine usage causes average fuel age to exceed approximately one year, fuel maintenance mode will run the engine to use up the old fuel. The engine will run until enough fresh fuel is added to bring the average fuel age into an acceptable range. Allowing more old fuel to be used up by fuel maintenance mode and adding a

larger amount of fresh fuel will maximise the length of time before another fuel maintenance mode is needed. During fuel maintenance mode the engine may turn on and off.

When fuel maintenance mode is needed, a request screen appears on the Colour-Info-Display at vehicle start.

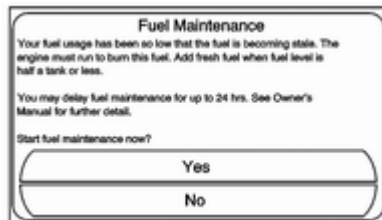


If **Yes** is selected, fuel maintenance mode will begin. Fuel maintenance mode will automatically continue at each vehicle start until fresh fuel is added.

If **No** is selected, the fuel maintenance mode request screen will appear when the vehicle is next

started. The fuel maintenance mode request can be delayed for only one day.

If the fuel maintenance mode request was delayed for one day, it will start at the next vehicle start and display the fuel maintenance mode notification screen on the Colour-Info-Display.

If fuel maintenance mode is required and the fuel level is low, fuel maintenance mode may eventually empty the fuel tank if fuel is not added. This will result in reduced, or no power. An adequate fuel level must be maintained in the vehicle to keep it operational.

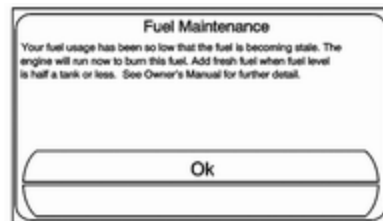

Engine exhaust

⚠ Danger

Engine exhaust gases contain poisonous carbon monoxide, which is colourless and odourless and could be fatal if inhaled.


If exhaust gases enter the interior of the vehicle, open the windows. Have the cause of the fault rectified by a workshop.

Avoid driving with an open load compartment, otherwise exhaust gases could enter the vehicle.

Electric drive unit

Operation

The vehicle uses an electric drive unit. The shift lever is located on the console between the seats.

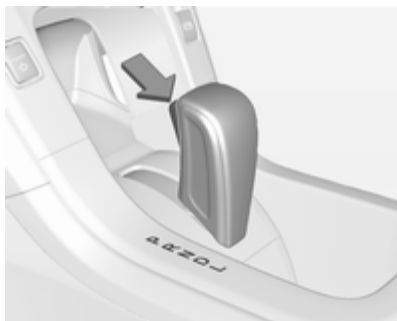

P (Park): This position locks the front wheels. It is the best position to use when starting the propulsion system because the vehicle cannot move easily.

⚠ Warning

It is dangerous to get out of the vehicle if the shift lever is not fully in **P** with the parking brake firmly applied. The vehicle can roll.

Do not leave the vehicle when the propulsion system is running, the vehicle can move suddenly. You or others could be injured. To be sure the vehicle will not move, even when you are on fairly level ground, always apply the parking brake and move the shift lever to **P**.

Make sure the shift lever is fully in **P** before starting the propulsion system. The vehicle has an electric drive unit shift lock control system. The brake pedal must be fully applied first and then the shift lever button pressed before shifting from **P** when the ignition is on. If you cannot shift out of **P**, ease the pressure on the shift lever, then push the shift lever all the way into **P** as you maintain brake

pedal application. Then press the shift lever button and move the shift lever into another gear.

Notice

If you have continuous problems to move the shift lever from **P** as mentioned, seek the assistance of a workshop.

Notice

The shift lock is always functional except in the case of an uncharged or low charged 12 volt battery.

Try charging or jump starting the 12 volt battery.

Jump start ⇨ 167.

R (Reverse): Use this gear to back up.

Notice

Shifting to **R** while the vehicle is moving forward could damage the electric drive unit. Shift to **R** only after the vehicle is stopped.

N (Neutral): In this position, the propulsion system does not connect with the wheels.

D (Drive): This position is for normal driving. It provides the best fuel economy. If more power is needed for passing, and the vehicle is:

- Going less than 35 mph, push the accelerator pedal about halfway down.
- Going about 35 mph or more, push the accelerator all the way down.

Notice

If the vehicle seems to accelerate slowly or not respond when you go faster, and you continue to drive the vehicle that way, you could damage the electric drive unit.

Seek the assistance of a workshop.

L (Low): This position reduces vehicle speed without using the brakes. You can use **L** on hills. It can help control vehicle speed going down steep mountain roads along with using the brakes off and on. You can use **L** on very steep hills, in deep snow or in mud.

Notice

Spinning the tyres or holding the vehicle in one place on a hill using only the accelerator pedal may damage the electric drive unit. If you are stuck, do not spin the tyres. When stopping on a hill, use the brakes to hold the vehicle in place.

Brakes

Antilock brake system

Antilock brake system (ABS) prevents the wheels from locking.

ABS starts to regulate brake pressure as soon as a wheel shows a tendency to lock. The vehicle remains steerable, even during hard braking.

ABS control is made apparent through a pulse in the brake pedal and the noise of the regulation process.

For optimum braking, keep the brake pedal fully depressed throughout the braking process, despite the fact that the pedal is pulsating. Do not reduce the pressure on the pedal.

After starting off, the system performs a self-test which may be audible.

Control indicator (P) ⇨ 69.

Fault

⚠ Warning

If there is a fault in the ABS, the wheels may be liable to lock due to braking that is heavier than normal. The advantages of ABS are no longer available. During hard braking, the vehicle can no longer be steered and may swerve.

Have the cause of the fault remedied by a workshop.

Parking brake

Electrical parking brake



The electrical parking brake can always be activated, even if the ignition is off. To prevent draining of the 12 volt battery, avoid repeated cycles of the electrical parking brake system when the ignition is off.

In case of insufficient electrical power, the electrical parking brake cannot be applied or released.

Before leaving the vehicle, check the control indicator (P) to ensure the parking brake is applied.

Electrical parking brake apply

The electrical parking brake can be applied anytime the vehicle is stopped. The electrical parking brake is applied by momentarily lifting up on the  switch. Once fully applied, the control indicator  will be on.

While the brake is being applied, the control indicator  will flash until full apply is reached. If the light does not come on, or remains flashing, seek the assistance of a workshop.

Do not drive the vehicle if the control indicator  is flashing.

If the electrical parking brake is applied while the vehicle is in motion, a chime will sound and a message displays in the the Driver Information Centre (DIC). The vehicle will decelerate as long as the switch is held in the up position.

Releasing the  switch during the deceleration, will release the parking brake. If the  switch is held in the up position until the vehicle comes to a stop, the electrical parking brake will remain applied.

If the control indicator  flashes continuously, the electrical parking brake is only partially applied or released or there is a problem with the electrical parking brake. If so, a message is displayed in the Driver Information Centre (DIC). If  flashes continuously, release the electrical parking brake and attempt to apply it again. If  continues to flash, do not drive the vehicle. Seek the assistance of a workshop.

If the electrical parking brake fault indicator  is on, the electrical parking brake has detected a system problem and is operating with reduced functionality. To apply the electrical parking brake when  is on, lift up on the  switch and hold it in the up position until the control indicator  remains on. If the electrical parking brake fault indicator  is on, seek the assistance of a workshop.

If the electrical parking brake fails to apply, the rear wheels should be blocked to prevent vehicle movement.

For maximum electrical parking brake force when parking on a hill, pull the electrical parking brake switch twice.

Electrical parking brake release

To release the electrical parking brake, switch the ignition on, apply and hold the brake pedal and push down momentarily on the  switch. If attempting to release the electrical parking brake without the brake pedal applied, a chime will sound and a message will be displayed in the DIC. The electrical parking brake is released when  is off.

If  is on, the electrical parking brake has detected a system problem, and is operating with reduced functionality. To release the electrical parking brake when  is on, push down on the  switch and hold it in the down position until the control indicator  is off. If the light remains on, seek the assistance of a workshop.

Notice

Driving with the parking brake on can overheat the brake system and cause premature wear or damage to brake system parts. Make sure that the parking brake is fully released and the control indicator (P) is off before driving.

Automatic release of the electrical parking brake

The electrical parking brake will automatically release if the vehicle is running, placed into gear and an attempt is made to drive away. Avoid rapid acceleration when the electrical parking brake is applied, to preserve parking brake lining life.

Electrical parking brake (P) control indicator ⇨ 69.

Electrical parking brake fault (X) control indicator ⇨ 69.

Driver Information Centre (DIC) ⇨ 72.

Regenerative braking

Regenerative braking takes some of the energy from the moving vehicle and turns it back into electrical energy.

This energy is then stored back into the high voltage battery system, contributing to increased energy efficiency.

The hydraulic disc brakes work with the regenerative braking to ensure effective braking, such as when a high braking demand is requested.

The braking system is computer controlled and blends the regenerative braking with the conventional hydraulic disc brakes to meet any requirements for deceleration. The controller interprets the braking request and uses regenerative braking, conventional hydraulic braking or a combination of both as necessary. Because the controller applies the hydraulic brakes through its high pressure accumulator, you may occasionally hear the motor-driven pump when it recharges the system.

In the event of a controller problem, the brake pedal may be harder to push and the stopping distance may be longer.

Driver Information Centre (DIC) ⇨ 72.

Ride control systems

Traction Control system

The Traction Control system (TC) is a component of the Electronic Stability Control.

TC improves driving stability when necessary, regardless of the type of road surface or tyre grip, by preventing the drive wheels from spinning.

As soon as the drive wheels starts to spin, electric drive unit output is reduced and the wheel spinning the most is braked individually. This considerably improves the driving stability of the vehicle on slippery road surfaces.

TC is operational as soon as the control indicator  extinguishes.

When TC is active  flashes.

Warning

Do not let this special safety feature tempt you into taking risks when driving.

Adapt speed to the road conditions.

Control indicator  $\rightarrow$ 70.

Deactivation



TC can be switched off when spinning of drive wheels is required: Press  button in the overhead console.

Control indicator  illuminates and a message in the Driver Information Centre (DIC) is displayed.

TC is reactivated by pressing the  button again.

TC is also reactivated the next time the ignition is switched on.

Fault

If there is a problem detected with TC, a message is displayed on the DIC. When this message is displayed and  illuminates, the vehicle is safe to drive but the system is not operational. Driving should be adjusted accordingly.

Resetting

If  comes on and stays on, reset the system as follows:

1. Stop the vehicle.
2. Switch the ignition off and wait for 15 seconds.
3. Switch the ignition on.

If  still comes on and stays on, seek the assistance of a workshop.

Caution

Do not repeatedly brake or accelerate heavily when TC is off. The vehicle's driveline could be damaged.

Electronic Stability Control

Electronic Stability Control (ESC) improves driving stability when necessary, regardless of the type of road surface or tyre grip. It also prevents the drive wheels from spinning.

As soon as the vehicle starts to swerve (understeer/oversteer), electric drive unit output is reduced and the wheels are braked individually. This considerably improves the driving stability of the vehicle on slippery road surfaces.

ESC is operational as soon as the control indicator  extinguishes.

When ESC is active,  flashes.

Warning

Do not let this special safety feature tempt you into taking risks when driving.

Adapt speed to the road conditions.

Control indicator  70.

Deactivation

For very high-performance driving, ESC can be deactivated: Press and hold  button in the overhead console

depressed until  and  illuminate and a message in the Driver Information Centre (DIC) is displayed.

ESC is reactivated by pressing the  button again.

If cruise control is being used when ESC activates, cruise control will automatically disengage. Press the cruise control button to re-engage when road conditions allow.

Cruise control  119.

Driver Information Centre (DIC)  72.

Fault

If there is a problem detected with ESC, a message is displayed on the DIC. When this message is displayed and  illuminates, the vehicle is safe to drive but the system is not operational. Driving should be adjusted accordingly.

Resetting

If  comes on and stays on, reset the system as follows:

1. Stop the vehicle.
2. Switch the ignition off and wait for 15 seconds.
3. Switch the ignition on.

If  still comes on and stays on, seek the assistance of a workshop.

Driver assistance systems

Cruise control


The cruise control lets the vehicle maintain a speed of about 20 mph or more without keeping your foot on the accelerator. Cruise control does not work at speeds below 20 mph.

Do not use the cruise control if it is not advisable to maintain a constant speed.

With the Traction Control system or Electronic Stability Control, the system may begin to limit wheel spin while you are using cruise control. If this happens, the cruise control will automatically disengage.

Traction Control system ⇨ 117.

Electronic Stability Control ⇨ 118.

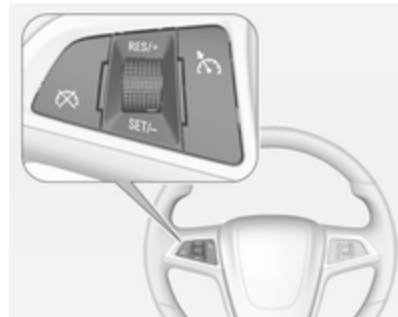

The cruise control buttons are on the steering wheel.

 : Press to turn the cruise control system on and off. An indicator light will turn on or off in the instrument cluster.

 : Press to disengage cruise control without erasing the set speed from memory.

RES/+: Move the thumbwheel up to resume to a previously set speed or to accelerate.

SET/-: Move the thumbwheel down to set a speed and activate cruise control or to make the vehicle decelerate.

Setting cruise control

To set a speed:

1. Press  to turn cruise control on.
2. Get up to the desired speed.
3. Move the thumbwheel down toward **SET/-** and release it. The desired set speed briefly appears in the instrument cluster.
4. Take foot off the accelerator pedal.

When the brakes are applied, the system deactivates the cruise control.

Resuming a set speed

If the cruise control is set at a desired speed and then the brakes are applied, the cruise control is disengaged without erasing the set speed from memory. Once the vehicle speed is about 20 mph or higher, move the thumbwheel up toward **RES/+** briefly and then release it. The vehicle returns to the previously set speed and stays there.

Increasing speed

If the cruise control system is already activated:

- Move the thumbwheel up toward **RES/+** and hold it until the vehicle accelerates to the desired speed, then release it.
- To increase the speed in small amounts, move the thumbwheel up toward **RES/+** briefly and then release it. Each time this is done, the vehicle goes about one mph faster.

Reducing speed

If the cruise control system is already activated:

- Move the thumbwheel toward **SET/-** – and hold until the desired lower speed is reached, then release it.
- To slow down in very small amounts, move the thumbwheel toward **SET/-** briefly. Each time this is done, the vehicle goes about one mph slower.

Passing another vehicle

Use the accelerator pedal to increase vehicle speed. When taking the foot off the pedal, the vehicle will slow down to the previously set cruise control speed.

Using cruise control on hills

How well the cruise control works on hills depends upon the vehicle speed, load and the steepness of the hills. When going up steep hills, you might have to step on the accelerator pedal to maintain the vehicle speed. When going downhill, you might have to brake or shift to **L** to maintain the vehicle speed. When the brakes are applied the cruise control is disengaged.

Deactivate cruise control

Press button , control indicator  in instrument cluster illuminates white. Cruise control is deactivated. Last used set speed is stored in memory for later speed resume.


Automatic deactivation:

- vehicle speed below approx. 20 mph,
- the brake pedal is depressed,
- selector lever in **N**,
- the Traction Control system or Electronic Stability Control is operating.


Deleting speed memory

The cruise control set speed is deleted from memory by pressing  or if the ignition is switched off.

Ultrasonic parking assist

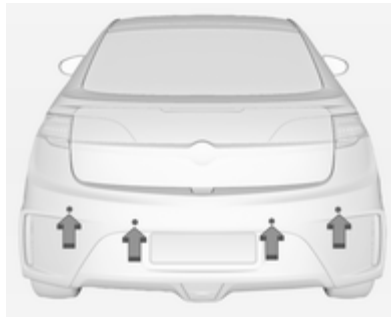

The ultrasonic parking assist makes parking easier by measuring the distance between the vehicle and obstacles, and giving acoustic signals. It is the driver, however, who bears full responsibility for the parking manoeuvre.

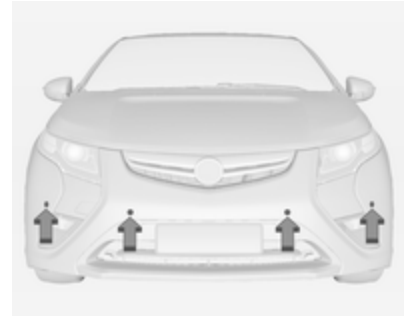

Ultrasonic parking assist operates at speeds less than 5 mph. The sensors on the front and rear bumper detect objects up to 4 ft. in front of the vehicle, 5 ft. behind the vehicle and at least 10 inch off the ground.

System operation

When the vehicle is shifted into **R** the front and rear sensors are automatically turned on. After the vehicle is shifted out of **R**, the rear sensors are turned off and the front sensors stay on until the vehicle is above a speed of 5 mph. For the front park assist system to be active again

without shifting into **R**, the park assist button in the overhead console must be pressed.

High-toned beeps from the front speakers are for objects detected near the front bumper. Low-toned beeps from the rear speakers are for objects detected near the rear bumper.

The interval between the beeps becomes shorter as the vehicle gets closer to the obstacle. When the distance is less than 12 inch the beeping is a continuous tone for five seconds.

Object detection on front and rear

In general, if objects are detected at the same time near both the front and rear bumpers while backing up, the beeps only sound to indicate that objects are close to the rear bumper.

However, if an object comes within 1 ft. of the front bumper while the vehicle is backing up and at the same time there is another object further than 1 ft. from the rear bumper, then

the beeps only sound to indicate the object that is closer to the front bumper.

Activation and deactivation



Press **P**  on the overhead console to activate the system. The LED lights up.

Press **P**  again to deactivate the system. The LED turns off.

After the system has been deactivated, a message in the Driver Information Centre (DIC) is displayed for a short time.

Ultrasonic parking assist defaults to the on setting each time the vehicle is started.

Fault

When the system does not work properly, an error message is displayed in the DIC.

The following conditions could affect the system's performance:

- The driver has disabled the system.
- The ultrasonic sensors are not clean. Keep the vehicle's bumpers free of mud, dirt, snow, ice and slush.
- The park assist sensors are covered by frost or ice.
- An object was hanging out of the tailgate during the last drive cycle. Once the object is removed, ultrasonic parking assist will return to normal operation.
- An object or cover is attached to the front of the vehicle.

- The bumper is damaged. Take the vehicle to a workshop to repair the system.
- Other conditions, such as vibrations from a jackhammer are affecting system performance.

Should the system still do not work properly, seek the assistance of a workshop.

Driver Information Centre (DIC) ⇨ 72.

Important hints for using the ultrasonic parking assist systems

Warning

Under certain circumstances, various reflective surfaces on objects or clothing as well as external noise sources may cause the system to fail to detect obstacles.

Special attention has to be paid to low obstacles which can damage the lower part of the bumper. If such obstacles leave the detection

area of the sensors during approach of the vehicle, a continuous warning tone will sound.

Caution

Performance of the ultrasonic parking assist systems can be reduced due to heavy loading.

Special conditions apply if there are taller vehicles involved (e.g. off-road vehicles, mini vans, vans). Object identification in the upper part of these vehicles cannot be guaranteed.

Objects with a very small reflection cross section, like objects of narrow size or soft materials, may not be detected by the system.

Ultrasonic parking assist will not avoid a collision with objects which are out of the detection range of the sensors.

Rear view camera

Warning

The rear view camera system does not display pedestrians, bicyclists, animals or any other object located outside the camera's field of view, below the bumper or under the vehicle.

Do not back the vehicle using only the rear view camera screen or by using the screen during longer, higher speed backing manoeuvres or where there could be cross-traffic. Perceived distances may be different from actual distances.

Failure to use proper care before backing may result in injury, death or vehicle damage. Always check before backing by checking behind and around the vehicle.

The rear view camera system can assist the driver when backing up by displaying a view of the area behind the vehicle.

System operation

When shifting into **R**, the image of the area behind the vehicle appears in the Colour-Info-Display with the message **Check surroundings for safety**. The previous screen displays approx. 10 seconds after shifting out of **R**.

To cancel the delay, do one of the following:

- Press a button on the infotainment system.
- Shift into **P**.
- Reach a vehicle speed of 5 mph.

Activation and deactivation

To turn the rear view camera system on or off:

1. Shift into **P**.
2. Press the **CONFIG** button on the instrument panel.
3. Select display.
4. Select camera. When a checkmark appears next to camera, then the rear view camera system is on.

Symbols

The navigation system may have a feature that lets the driver view symbols on the navigation screen while using the rear view camera. The ultrasonic parking assist system must not be disabled to use the caution symbols. An error message may be displayed if ultrasonic parking assist has been disabled and the symbols have been turned on.

The symbols appear and may cover an object when viewing the navigation screen when an object is detected by the ultrasonic parking assist system.

To turn the symbols on or off:

1. Shift into **P**.
2. Press the **CONFIG** button on the instrument panel.
3. Select **Display**.
4. Select **Symbols**. When a checkmark appears next to **Symbols**, symbols will appear.

Guiding lines

The rear view camera system has a guideline overlay that can help the driver align the vehicle when backing into a parking spot.

To turn the guidelines on or off:

1. Shift into **P**.
2. Press the **CONFIG** button on the instrument panel.
3. Select **Display**.
4. Select **Guiding lines**. When a checkmark appears next to **Guiding lines**, guidelines will appear.

Rear view camera location



The rear view camera is located above the number plate.

The area displayed by the camera is limited.

It does not display objects that are close to either corner or under the bumper and can vary depending on vehicle orientation or road conditions.

The distance of the image that appears on the screen is different from the actual distance.

Working improperly

The rear view camera system may not work properly or display a clear image if:

- It is dark.
- The sun or the beam of headlights is shining directly into the camera lens.
- Ice, snow, mud or anything else has built up on the camera lens. Clean the lens, rinse it with water and wipe it with a soft cloth.

If any other problem occurs or if a problem persists, seek the assistance of a workshop.

Charging

This section explains the process for charging the vehicle's high voltage battery. Do not allow the vehicle to remain in temperature extremes for long periods without being driven or plugged in.

The vehicle has to be plugged in when the temperatures are below -25°C to operate properly and to maximise high voltage battery life.

However, we recommend that the vehicle be also plugged in when temperatures are below 0°C or above 32°C .


The charging system may run fans and pumps that result in sounds from the vehicle while it is turned off. Additional clicking sounds may be caused by the electrical devices used while charging.

While the charge cord is plugged into the vehicle, the vehicle cannot be driven.

Start charge




1. With the vehicle in **P**, press  for one second to open the charge port door.

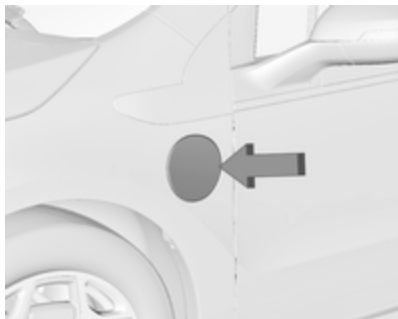

The charge port door can also be opened using the radio remote control.

Radio remote control ⇨ 21.

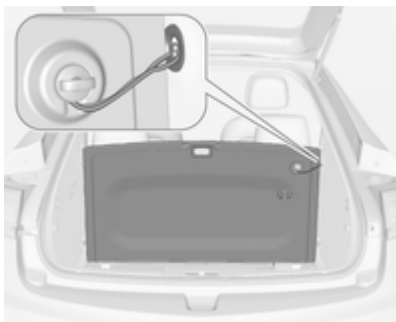

2. Open the tailgate, lift the floor cover and use the loop to hook the floor cover to the side panel.
Remove the charge cord.



Pull up on the charge cord handle to release it from the handle clip. Lift the charge cord up and rearward to remove it from the vehicle. The vehicle plug is stored as shown.

3. Plug the charge cord into the electrical outlet. Verify that the charge cord status indicators are both green. Select the appropriate charge level. The charge level can be set by using the charge level button on the charge cord.


⚠ Warning

If the capacity of the electrical circuit or AC socket is not known, only use charge level 1 until the circuit capacity has been inspected by a qualified electrician. Using a charge level that exceeds either the electrical circuit or the AC outlet capacity may start a fire or damage the electrical circuit.

Electrical requirements ⇨ 132.

Colour-Info-Display ⇨ 74.

Charge cord ⇨ 129.

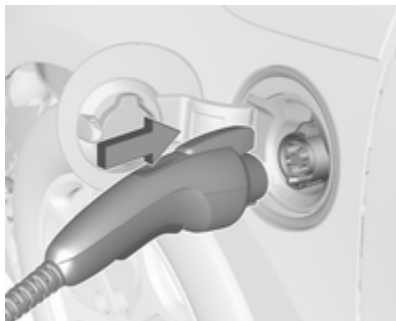

4. Plug in the vehicle plug of the charge cord into the charge port on the vehicle. Verify that the charging status indicator illuminates on top of the instrument panel and a horn chirp occurs.

Charging status ⇨ 128.

5. Press  on the radio remote control to arm the charge cord theft alert.

Radio remote control ⇨ 21.

Vehicle personalisation ⇨ 83.


End charge

1. Press  on the radio remote control to disarm the charge cord theft alert.

Radio remote control ⇨ 21.



2. Unplug the vehicle plug of the charge cord from the vehicle by squeezing the vehicle plug lever and pull to remove.
3. Close the charge port door.
4. Unplug the charge cord from the electrical outlet.

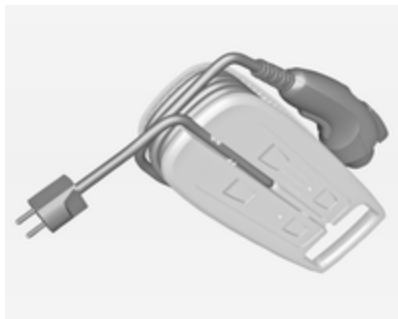

5. Before storing the charge cord, have the charge cord face up and wrap the charge cable neatly counterclockwise around the body of the charge cord.
6. Place the charge cord, face down, into the storage compartment with the front edge of the charge cord body under the clips located in the front of the storage compartment. The vehicle plug should be on the right side of the charge cord.



7. Push the charge cord handle down until it locks into the handle clip at the rear of the storage compartment.

Programmed charging override

To temporarily override a delayed charge event, unplug the charge cord from the charge port and then plug it back in within five seconds. A single horn chirp will sound and charging will begin immediately.

To cancel a temporary override, unplug the charge cord, wait for 10 seconds, and then plug the charge cord back in. A double horn chirp will sound and charging will be delayed.

Programmable charging in the Colour-Info-Display ➞ 74.

Charging status



The vehicle has a charging status indicator at the centre of the instrument panel near the windscreen. When the vehicle is

plugged in and the vehicle power is off, the charging status indicator indicates the following:

- Solid green – One horn chirp: Vehicle is plugged in. Battery is not fully charged. Battery is charging.
- Solid green or long flashing green – Four horn chirps: Insufficient time to fully charge by departure time.
- Long flashing green – Two horn chirps: Vehicle is plugged in. Battery is not fully charged. Battery charging is delayed.
- Short flashing green – No horn chirp: Vehicle is plugged in. Battery is fully charged.
- Solid yellow – No horn chirp: Vehicle is plugged in. It is normal for the charging status indicator to turn yellow for a few seconds after plugging in a compatible charge cord. Otherwise, the charging system has detected a fault and will not charge the battery. Malfunction indicator light ⇨ 68.

- No light signal (upon plug-in) – No horn chirps – Charge cord connection should be checked.
- No light signal (after green or yellow charging status indicator indication observed) – No horn chirps – Charge cord connection should be checked.

Malfunction indicator light ⇨ 68.

If there is no light signal but the horn chirps repeatedly, the electricity was interrupted before charging was complete.

To terminate this alert, do one of the following:

- Unplug the charge cord.
- Press  on the radio remote control.
- Press and hold  on the radio remote control, then press again to stop the panic alarm.
- Press the horn.

Vehicle personalisation ⇨ 83.

The system may be thermally conditioning the battery during any of the states above, requiring electrical energy to be transferred to the vehicle.

If the vehicle is plugged in and vehicle power is on, the charging status indicator will be on solid green. The same is true during passenger compartment preconditioning if the vehicle is plugged in.

If the vehicle is plugged in and the charging status indicator is off, a charging fault has been detected.

Charge cord

Danger

There is a risk of electric shock that may cause personal injury or death.

Do not use the charge cord if any part of the charge cord is damaged.

Do not open or remove the charge cord cover.

Service by qualified personnel only. Connect the charge cord to a properly grounded outlet with cords that are not damaged.

⚠ Warning

Using the charge cord with a worn or damaged AC outlet may cause burns or start a fire. Periodically, check the AC wall plug and charge cord while the vehicle is charging.

If the AC wall plug feels hot, unplug the charge cord and have the AC outlet replaced by a qualified electrician.

Replace the charge cord if the AC wall plug or cord are damaged. Do not use an AC outlet that is worn or damaged.

⚠ Warning

An extension cord should not be used to charge the vehicle. Use of an extension cord may increase the risk of electric shock or other hazards.

If an extension cord is used because of limited access to 230 volt AC power, use the following safeguards:

The 230 volt AC outlet should be residual current device protected. A residual current device monitors for ground faults, helping reduce the risk of electric shocks.

The extension cord should be:

- Residual current device protected.
- At least 2.5 square mm, 3 conductor.
- Rated for outdoor.

⚠ Warning

Multi outlet power strips, surge protectors or similar devices should not be used with the charge cord.

Use of multi outlet power strips, surge protectors or similar devices may increase the risk of electrical shock and other hazards.

Do not use these types of devices with the charge cord.




A portable charge cord used to charge the vehicle high voltage battery is stored under the load compartment.

The charge cord used to charge the vehicle is a high-powered electrical device. During normal operation, the AC wall plug of the charge cord may feel warm. The AC wall plug must fit tightly into an AC outlet that is in good condition.

Charge cord status indicators

The charge cord status indicators illuminate green or flash red to identify the charge cord status. When both indicators are green, the vehicle can be charged. If any indicators are flashing red, the charge cord will not permit vehicle charging.

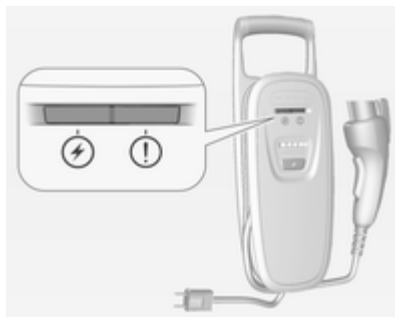

When the AC indicator ⚡ flashes red, the AC voltage is out of range.

When the AC indicator ⚡ and the fault indicator ! flash red, the AC outlet does not have a proper safety ground. Charging is not permitted for safety reasons. The AC outlet must be repaired or another outlet source should be used.

When just the fault indicator ! flashes red, there may be a charge cord fault. The charge cord will attempt to reset automatically. If the fault indicator ! continues to flash for more than 30 seconds, unplug the

charge cord from the wall to reset. If the fault remains, seek the assistance of a workshop.

Charge level button

⚠ Warning

If the capacity of the electrical circuit or AC socket is not known, only use charge level 1 until the circuit capacity has been inspected by a qualified electrician. Using a charge level that exceeds either the electrical circuit or the AC outlet capacity may start a fire or damage the electrical circuit.

Notice

By choosing a reduced charge level, the charging time is increased.



Two charge levels are available by pressing the charge level button. Select charge level 1 or charge level 2.

Colour-Info-Display ⇨ 74.

Level 2: All four charge level indicators will be lit. The charging current of this level is 10 ampere.

Level 1: Two charge level indicators will be lit. The charging current of this level is 6 ampere.

Vehicle plug

The vehicle plug attaches to the charge port on the vehicle. There is a flashlight built into the vehicle plug that can be used by squeezing the vehicle plug lever. The flashlight will turn off when the connection is complete and the lever is released.

Adapters

⚠ Warning

Using damaged adapters or adapters not designed for use with the charge cord may increase the risk of electric shock or start a fire.

Only use adapters that have been designed to be used with the charge cord.

Do not use a damaged adapter.

An adapter kit may be included to allow use of your charge cord in multiple countries in central Europe. When using an adapter make sure the charge level selected is

appropriate for your supply circuit. See the reference card included in the adapter kit.

Electrical requirements

Notice

Do not use portable or stationary backup generating equipment to charge the vehicle. This may cause damage to the vehicle's charging system. Only charge the vehicle from utility supplied power.

The AC socket must have a grounded, dedicated, 16 ampere (13 ampere in some countries) or greater, 3 pin wall plug. That means there should be no other major appliances connected to the same circuit. If it is not a dedicated circuit, the current rating of the outlet circuit breaker could be exceeded and cause it to trip or open.

Two charge levels are possible with the charge cord supplied with the vehicle ⇨ 129. The normal charge level (level 2) will draw a maximum of

10 ampere and the reduced charge level (level 1) will draw a maximum of 6 ampere from the socket.

Warning

If the capacity of the electrical circuit or AC socket is not known, only use charge level 1 until the circuit capacity has been inspected by a qualified electrician. Using a charge level that exceeds either the electrical circuit or the AC outlet capacity may start a fire or damage the electrical circuit.

The reduced charging level increases the charging time.

We recommend not to draw more than 10 ampere out of a household socket with any charging equipment.

All electric vehicle charging equipment communicates its maximum electrical capability to the vehicle and the vehicle limits charging to this value. Follow the instructions on charge rate selection that come from the equipment manufacturer.

The vehicle can be charged at 16 ampere by using special equipment (e.g. GM Wallbox) which has to be installed by a qualified electrician directly to the grid. That reduces the charging time to a minimum.

230 volt / 32 ampere circuits provide flexibility for future vehicle charging needs. Contact your dealer for more information.

Fuel

Fuel for petrol engines

Only use unleaded fuel that complies with EN 228.

Equivalent standardised fuels with an ethanol content of max. 10 % by volume may be used. In this case only use fuel that complies with E DIN 51626-1.

Use fuel with the recommended octane rating $\geq$ 181. Use of fuel with too low an octane rating can reduce engine power and torque and slightly increases fuel consumption.

Caution

Use of fuel that does not comply to EN 228 or similar can lead to deposits or engine damage and loss of warranty.

Caution

Use of fuel with too low an octane rating could lead to uncontrolled combustion and engine damage.

Refuelling**⚠ Danger**

Before refuelling, switch off ignition and any external heaters with combustion chambers. Switch off any mobile phones.

Follow the operating and safety instructions of the filling station when refuelling.

⚠ Danger

Fuel is flammable and explosive. No smoking. No naked flames or sparks.

If you can smell fuel in your vehicle, have the cause of this remedied immediately by a workshop.

Caution

In case of misfuelling, do not switch on ignition.

Notice

The vehicle may require the use of an auxiliary heat source under certain cold conditions. This provides additional heating and defrost capability obtained by running the engine, even if the high voltage battery is adequately

charged. Under these conditions, the engine will start and use fuel. Make sure there is fuel in the tank.

The fuel system on this vehicle requires a refuelling process to control evaporative emissions. To refuel the vehicle:



1. Press the fuel door button on the driver door for one second. A message displays on the Driver Information Centre (DIC) to wait.



2. When a message displays in the DIC that the system is ready to be refueled, the fuel door on the right rear side of the vehicle will unlock. Push the rearward edge of the fuel door in and release to open the door.
3. Turn the fuel cap counterclockwise to remove. While refuelling, hang the fuel cap tether from the hook on the inside of the fuel door. Complete refuelling within 30 minutes of pushing the fuel door button found on the driver side door. If

refuelling for more than 30 minutes, push the fuel door button again.

4. After refuelling, reinstall the fuel cap by turning it clockwise until it clicks. Close the fuel door.

Do not top off or overfill the tank and wait a few seconds before removing the nozzle. Clean fuel from painted surfaces as soon as possible.

Fuel filler cap

Only use genuine fuel filler caps.

Fuel consumption - CO₂-Emissions

Fuel

To convert l/100 km into mpg, divide 282 by number of litres/100 km.

- urban: 0.9 l/100 km,
- extra urban: 1.3 l/100 km,
- combined: 1.2 l/100 km.

CO₂

- urban: 21 g/km
- extra urban: 30 g/km
- combined: 27 g/km

General information

For the values specific for your vehicle, refer to the EEC Certificate of Conformity provided with your vehicle or other national registration documents.

The determination of fuel consumption is regulated by directive R (EC) No. 715/2007 (in the newest version respectively).

The specification of CO₂ emission is also a constituent of the directive.

The figures given must not be taken as a guarantee for the actual fuel consumption of a particular vehicle. Furthermore, fuel consumption is dependent on personal driving style as well as road and traffic conditions.

All values are based on the EU base model with standard equipment.

The calculation of fuel consumption takes into account the vehicle's kerb weight, ascertained in accordance with the regulations. Optional equipment may result in slightly higher fuel consumption and CO₂ emission levels and a lower maximum speed.

Towing

General information

The vehicle is neither designed nor intended to tow a trailer or another vehicle.

Vehicle care

General Information	137
Vehicle checks	138
Bulb replacement	145
Electrical system	148
Vehicle tools	156
Wheels and tyres	156
Jump starting	167
Towing	170
Appearance care	171

General Information

Accessories and vehicle modifications

We recommend to use genuine parts and accessories and factory approved parts specific for your vehicle type. We cannot assess or guarantee reliability of other products - even if they have a regulatory or otherwise granted approval.

Do not make any modifications to the electrical system, e.g. changes of electronic control units (chip tuning).

Caution

When transporting the vehicle on a train or on a recovery vehicle, the mud flaps might be damaged.


Lifting the vehicle

⚠ Warning


Lifting the vehicle improperly can cause serious injuries to you and others or damage the vehicle.

The vehicle should be lifted just by well-trained staff and in an authorised workshop.

Jacking position for lifting platform

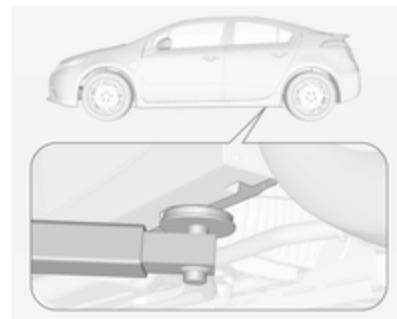

Rear arm position of the lifting platform at the underbody.

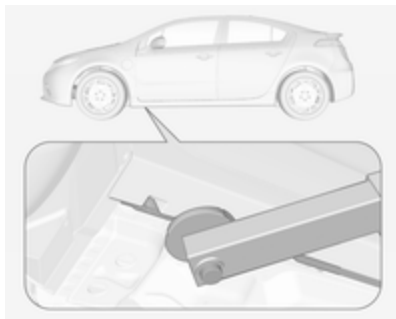

Front arm position of the lifting platform at the underbody.

Ramps may be needed under the front tyres to provide the necessary clearance for certain lifting platforms in this location.

Vehicle checks

Performing work



⚠ Danger

Never try to do your own service on high voltage battery components. You can be injured and the vehicle can be damaged if you try to do your own service work. Service and repair of these high voltage battery components should only be performed by a trained service technician with the

proper knowledge and tools. Exposure to high voltage can cause shock, burns, and even death. The high voltage components in the vehicle can only be serviced by technicians with special training.

High voltage components are identified by labels. Do not remove, open, take apart, or modify these components. High voltage cable or wiring has orange covering. Do not probe, tamper with, cut, or modify high voltage cable or wiring.

⚠ Warning

Only perform engine compartment checks when the ignition is off.

The cooling fan may start operating even if the ignition is off.

Bonnet

Opening

1. Switch off the ignition before opening the bonnet. If the ignition is switched on, the engine will start when the bonnet is opened.


Electric vehicle operation modes
⇨ 108.



2. Pull the release handle and return it to its original position.



3. Push the safety catch in the engine compartment to the right and open the bonnet.

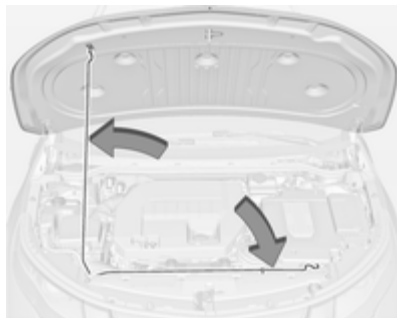

4. Release the bonnet prop rod from its retainer above the radiator support and place it securely into the slotted retainer in the bonnet.

Closing

Before closing the bonnet, press the bonnet prop in its retainer.

Lower the bonnet and allow it to drop into the catch. Check that the bonnet is engaged.


Engine oil

Check the engine oil manually on a regular basis to prevent damage to the engine. Ensure that the correct specification of oil is used. Recommended fluids and lubricants
⇨ 175.


Check with the vehicle on a level surface. The engine must be at operating temperature and switched off for at least 5 minutes.

Pull out the dipstick, wipe it clean, insert it to the stop on the handle, pull out and read the engine oil level.

Insert dipstick to the stop on the handle and make half a turn.

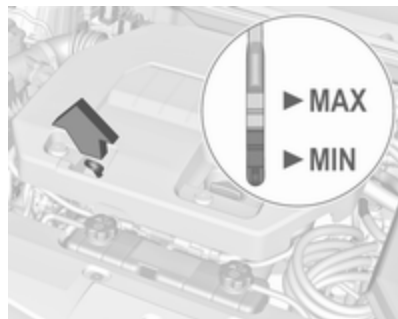

When the engine oil level has dropped to the **MIN** mark, top up engine oil.

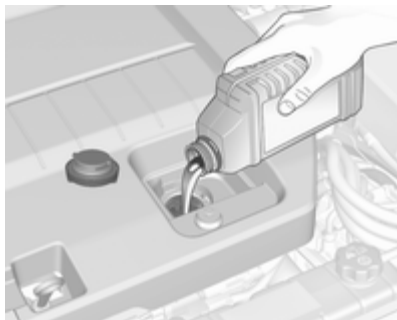

Recheck the level.

We recommend the use of the same grade of engine oil that was used at last change.

The engine oil level must not exceed the **MAX** mark on the dipstick.

Caution

Overfilled engine oil must be drained or suctioned out.

Capacities ⇨ 183, Engine oil quality/viscosity ⇨ 175.

Fit the cap on straight and tighten it.

Cooling system

The vehicle has three different cooling systems.

Check regularly the coolant level of the respective cooling systems and have the cause of a possible coolant loss remedied by a workshop.


Caution

Make sure that you never run the vehicle with insufficient coolant.

Too low a coolant level can cause damage to the vehicle.

Engine cooling system

The coolant reservoir is located on the ride side of the engine compartment.

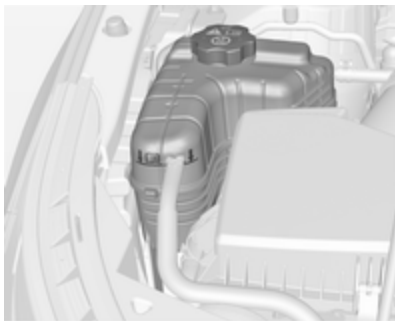

The coolant provides freeze protection down to approx. -28 °C.

Caution

Only use approved antifreeze.

If the engine cooling system is cold, the coolant level should be above the filling line mark. Top up if the level is low.

⚠ Warning

Allow the engine to cool before opening the cap. Carefully open the cap, relieving the pressure slowly.

To top up use a 1:1 mixture of approved coolant concentrate mixed with tap water. Install the cap tightly.


High voltage battery cooling system

⚠ Danger

The high voltage battery coolant may only be serviced by a qualified technician.

Improper handling could cause serious injuries or death.

The high voltage battery coolant reservoir is located on the front side of the engine compartment.

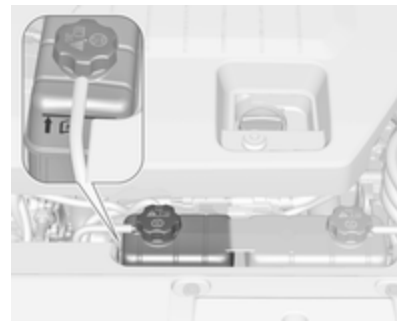

Check to see if coolant is visible in the high voltage battery coolant reservoir. If coolant is visible but the coolant level is below the cold fill line, there could be a leak in the cooling system. If the coolant level is too low, seek the assistance of a workshop.

Power electronics and charger modules cooling system


Danger

The power electronics and charger modules coolant may only be serviced by a qualified technician.

Improper handling could cause serious injuries or death.

The power electronics and charger modules are cooled using the same coolant loop.

The power electronics and charger modules coolant reservoir is located on the front side of the engine compartment.

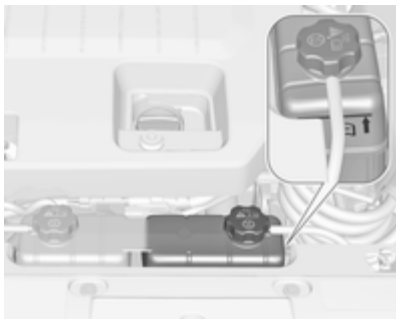

Check to see if coolant is visible in the power electronics and charger modules coolant reservoir. If coolant is visible but the coolant level is below the cold fill line, there could be a leak in the cooling system.

If the coolant level is too low, seek the assistance of a workshop.

Engine overheating

The vehicle has an indicator to warn of engine overheating.


If the decision is made not to lift the bonnet when this warning appears, get service help right away.

If the decision is made to lift the bonnet, make sure the vehicle is parked on a level surface.

Then check to see if the engine cooling fans are running. If the engine is overheating, the fans should be running. If they are not, do not continue to run the vehicle and have the vehicle serviced.

Washer fluid

An error message will appear on the Driver Information Centre (DIC) when the fluid level is low.

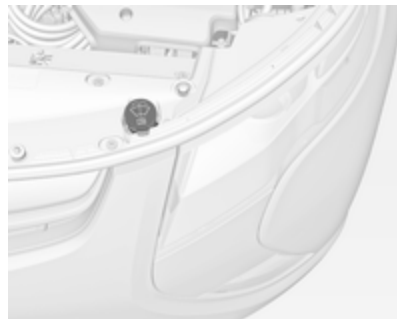

Fill with clean water mixed with a suitable quantity of washer fluid which contains antifreeze. For the correct mixing ratio, refer to the washer fluid container.

Caution

Only washer fluid with a sufficient antifreeze concentration provides protection at low temperatures or a sudden drop in temperature.

Brakes

In the event of minimum thickness of the brake lining, a squealing noise sounds during braking.

Continued driving is possible but have the brake lining replaced as soon as possible.

Once new brake linings are installed, do not brake unnecessarily hard for the first few journeys.

Brake fluid

⚠ Warning

Brake fluid is poisonous and corrosive. Avoid contact with eyes, skin, fabrics and painted surfaces.



With the vehicle not running for at least one minute, the maximum fluid level is at the top of the reservoir body. With the vehicle running, the fluid level should be in the proper operating range between the **MIN** and

MAX marks. If it is not, have the brake hydraulic system checked to see if there is a leak.

After work is done on the brake hydraulic system, make sure the level, with the vehicle running, is in the proper operating range between the **MIN** and **MAX** marks.

Only use high-performance brake fluid approved for the vehicle, consult a workshop.

Brake fluid ⇨ 175.

Battery

⚠ Danger

Only a trained service technician with the proper knowledge and tools may inspect, test or replace the high voltage battery.

Seek the assistance of a workshop if the high voltage battery needs service.

This vehicle has a high voltage battery and a standard 12 volt battery.

If the vehicle is in a crash, the sensing system may shut down the high voltage system. When this occurs, the high voltage battery is disconnected and the vehicle will not start. A service message will be displayed in the Driver Information Centre (DIC). Before the vehicle can be operated again, it must be serviced at a workshop.

A vehicle cover, which can reduce sun loading on the vehicle and improve high voltage battery life, is available from your Vauxhall Ampera Authorised Repairer.

The Vauxhall Ampera Authorised Repairer has information on how to recycle the high voltage battery.

Keep the vehicle plugged in, even when fully charged, to keep the high voltage battery temperature ready for the next drive. This is important when outside temperatures are extremely hot or cold.

Refer to the replacement number shown on the original battery label when a new 12 volt battery is needed. The vehicle has an Absorbed Glass

Mat (AGM) 12 volt battery. Installation of a standard 12 volt battery will result in reduced 12 volt battery life. When using a 12 volt battery charger on the 12 volt AGM battery, some chargers have an AGM battery setting on the charger. If available, use the AGM setting on the charger, to limit charge voltage to 14,8 volts.



Batteries do not belong in household waste. They must be disposed of at an appropriate recycling collection point.

Vehicle storage

Warning

Batteries have acid that can burn you and gas that can explode. You can be badly hurt if you are not careful.

Remove the 12 volt battery black, negative (–) cable from the battery to keep the 12 volt battery from running down or use a battery trickle charger. In addition, to avoid potential damage to the high voltage battery, perform the following recommended steps:

- Store the high voltage battery with 1/2 charge or less.
- Always store the vehicle in an environment between –10°C and 30°C.
- Vehicle storage at extreme temperatures can cause damage to the high voltage battery.


Remember to reconnect the 12 volt battery when ready to drive the vehicle.

Wiper blade replacement

Wiper blades on the windscreen

To replace the windscreen wiper blade:

1. Lift the wiper arm.

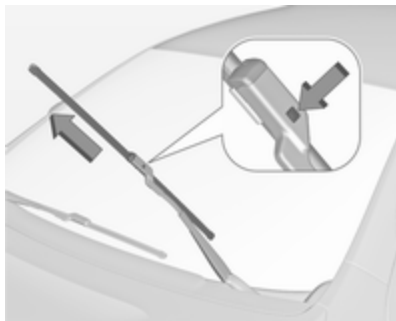

2. Press the button in the middle of the wiper arm connector and pull the wiper blade away from the arm connector.
3. Remove the wiper blade.

Headlight aiming

Headlight aim has been preset and should need no further adjustment. When driving in countries where the traffic drives on the opposite side of the road, it is not necessary to adjust the low beam.

If the vehicle is damaged in a crash, the headlight aim may be affected. If adjustment to the low beam is necessary, seek the assistance of a workshop.

Bulb replacement

Switch off the ignition and switch off the relevant switch or close the doors.

Only hold a new bulb at the base! Do not touch the bulb glass with bare hands.

Use only the same bulb type for replacement.

Replace headlight bulbs from within the engine compartment.

Halogen bulbs

Warning

Halogen bulbs have pressurised gas inside and can burst if you drop or scratch the bulb. You or others could be injured. Be sure to read and follow the instructions on the bulb package.

Halogen headlights

High/low beam



1. Remove the cover from the back of the headlight assembly by turning it counterclockwise.



2. Remove the bulb socket from the headlight assembly by turning it counterclockwise.
3. Remove the bulb from the socket.



4. Install the new bulb in the socket.
5. Install the bulb socket by turning it clockwise.
6. Install the cover in the back of the headlight assembly by turning it clockwise.

Tail lights

Have the lights replaced by a workshop.

Side turn signal lights

Have bulbs replaced by a workshop.


Reversing light

Have the bulbs replaced by a workshop.

Number plate light



1. Press the spring clip on the right end of the light assembly to the left to unlock the light assembly.
2. Pull down on the light assembly to remove it from the fascia.
3. Turn the bulb socket counterclockwise to remove it from the light assembly.

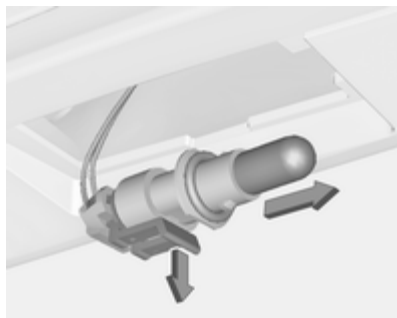

4. Pull gently the clamp and pull the bulb straight out of the bulb socket.
5. Push the replacement bulb straight into the bulb socket and turn the bulb socket clockwise to install it into the light assembly.
6. Reinstall the light assembly into the fascia by inserting the left side first.
7. Push the spring clip side into place.

Rear fog light

Have the bulbs replaced by a workshop.

Electrical system

High voltage devices and wiring

Warning

Exposure to high voltage can cause shock, burns, and even death. The high voltage components in the vehicle can only be serviced by technicians with special training.

High voltage components are identified by labels. Do not remove, open, take apart, or modify these components. High voltage cable or wiring has orange covering. Do not probe, tamper with, cut, or modify high voltage cable or wiring.

Electrical system overload

The vehicle has fuses and circuit breakers to protect against an electrical system overload.

When the current electrical load is too heavy, the circuit breaker opens and closes, protecting the circuit until the current load returns to normal or the problem is fixed. This greatly reduces the chance of circuit overload and fire caused by electrical problems.

Fuses and circuit breakers protect the following in the vehicle:

- Headlight wiring
- Windscreen wiper motor
- Power windows and other power accessories

Replace a bad fuse with a new one of the identical size and rating. If there is a problem on the road and a fuse needs to be replaced, the same amperage fuse can be borrowed. Choose some feature of the vehicle that is not needed to use and replace it as soon as possible.

Headlight wiring

An electrical overload may cause the lights to go on and off or in some cases to remain off. Have the headlight wiring checked right away if the lights go on and off or remain off.

Windscreen wipers

If the wiper motor overheats due to heavy snow or ice, the windscreen wipers will stop until the motor cools and the wiper control is turned off. After removal of the blockage, the wiper motor will restart when the control is then moved to the desired operating position.

Although the circuit is protected from electrical overload, overload due to heavy snow or ice, may cause wiper linkage damage.

Always clear ice and heavy snow from the windscreen before using the windscreen wipers. If the overload is caused by an electrical problem and not snow or ice, be sure to get it fixed.

Fuses

Data on the replacement fuse must match the data on the defective fuse.

There are four fuse boxes in the vehicle:


- in the front left of the engine compartment,
- on the right end side and the left end side of the instrument panel,
- behind a cover on the left side of the load compartment.

Before replacing a fuse, turn off the respective switch and the ignition.

A blown fuse can be recognised by its melted wire. Do not replace the fuse until the cause of the fault has been remedied.



Some functions are protected by several fuses.

Fuses may also be inserted without existence of a function.

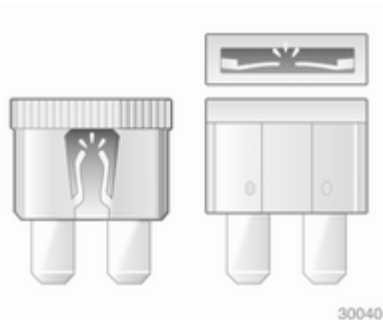

Fuse extractor

A fuse extractor may be located in the fuse box in the engine compartment.

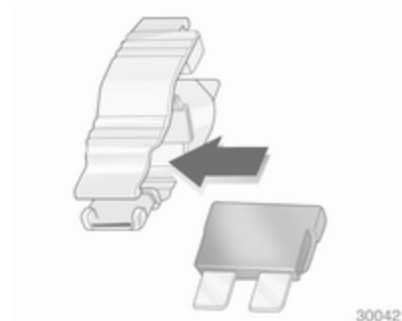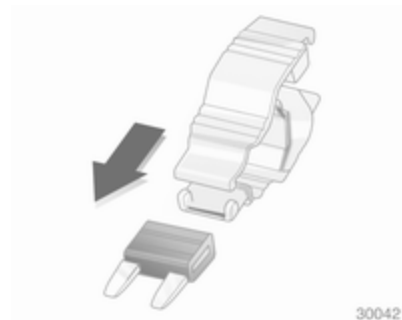




30044


Place the fuse extractor on the various types of fuse from the top or side, and withdraw fuse.

Engine compartment fuse box

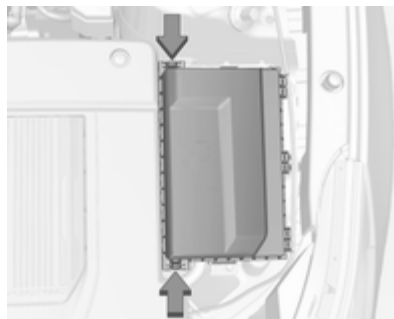

The fuse box is in the front left of the engine compartment.

To open the fuse block cover, press the clips at the front and back and rotate the cover up to the side.

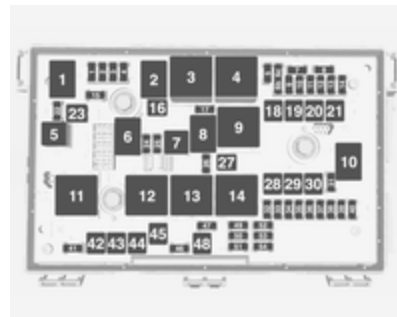

Mini fuses Usage

1	Engine control module – switched power
2	Emissions
3	–
4	Ignition coils / Injectors
5	Column lock
6	–
7	–
8	–

Mini fuses Usage

9	Heated mirrors
10	Air conditioning control module
11	Traction power inverter module – Battery
12	–
13	Cabin heater pump and valve
14	Theft deterrent — Power sounder
15	Traction power inverter module and transmission control module — Battery
17	Engine control module — Battery
22	Left high-beam headlight
24	–
25	–
26	Theft deterrent — Horn

Mini fuses Usage

31	–
32	Run/Crank — Sensing diagnostic module, instrument cluster, passenger airbag display, headlight level switch, automatic dimming inside rearview mirror
33	Run/Crank — Vehicle integration control module
34	Vehicle integration control module — Battery
35	–
36	Power electronics coolant pump
37	Cabin heater control module

Mini fuses Usage

38	Rechargeable energy storage system (high voltage battery) coolant pump
39	Rechargeable energy storage system (high voltage battery) control module
40	Front windscreen washer
41	Right high-beam headlight
46	–
47	–
49	–
50	Run/Crank — Rear view camera, accessory power module, tyre pressure monitor, headlight levelling motors

Mini fuses Usage

51	Run/Crank for ABS/ Rechargeable energy storage system (high voltage battery)
52	Engine control module/ transmission control module — Run/Crank
53	Traction power inverter module — Run/Crank
54	Run/Crank — Fuel system control module, air conditioning control module, on-board charger

J-case fuses Usage


16	—
18	—
19	Front power window
20	—

J-case fuses Usage

21	Antilock brake system electronic control unit
23	Charge port door
27	—
28	—
29	—
30	Antilock brake system motor
42	Right cooling fan
43	Front wipers
44	Charger
45	—
48	Left cooling fan


After having changed defective fuses, close the fuse box cover and press until it engages.

If the fuse box cover is not closed correctly, malfunctions may occur.

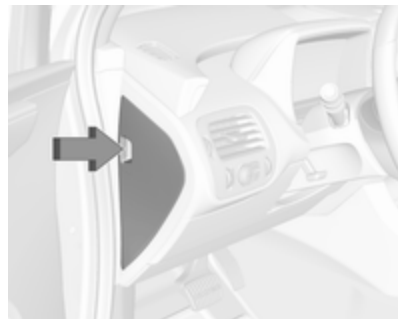Instrument panel fuse box**Instrument panel fuse box on the left side end**

The left instrument panel fuse box is located on the left side end of the instrument panel. To access the fuses, open the fuse panel door by pulling out.

A fuse puller is located in the engine compartment fuse box.

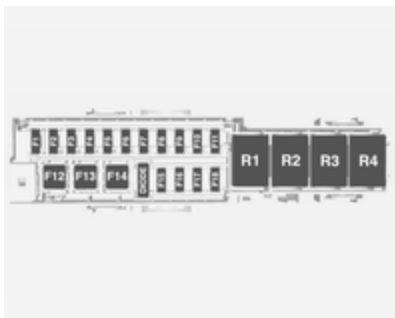

Fuses Usage

- | | |
|-----------|---|
| F1 | Power outlet – Top of IP storage bin |
| F2 | Radio |
| F3 | Instrument cluster (left hand drive) |
| F4 | Infotainment display |
| F5 | Heating, ventilation & air conditioning/ Integrated centre stack switches |
| F6 | Airbag (Sensing diagnostic module) |

Fuses Usage


- | | |
|------------|--|
| F7 | Left primary data link connector (left hand drive), Left secondary data link connector (right hand drive) |
| F8 | Column lock (left hand drive) |
| F9 | Hands-free phone |
| F10 | Body control module 1/Body control module electronics/ Remote entry/Power moding/ Centre high- mounted stoplight/ Number plate lights/Left daytime running light/Left position lights/ Tailgate release relay control/ Washer pump relay control/Switch indicator lights |
| F11 | Body control module 4/Left headlight |
| F12 | Blower (left hand drive) |
| F13 | – |
| F14 | – |

Fuses Usage

- | | |
|------------|---|
| F15 | Power outlet (Inside floor console/Rear of floor console) |
| F16 | – |
| F17 | – |
| F18 | – |


To reinstall the door, insert the bottom tab first, then push the door back into its original location.

Instrument panel fuse box on the right side end

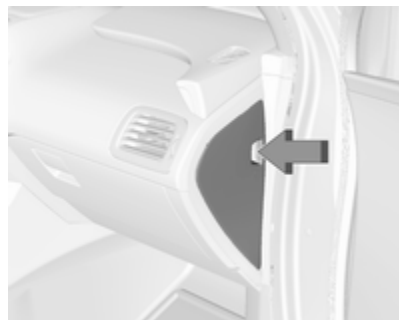

The right instrument panel fuse box is located on the right side end of the instrument panel. To access the fuses, open the fuse panel door by pulling out.

A fuse puller is located in the engine compartment fuse block.

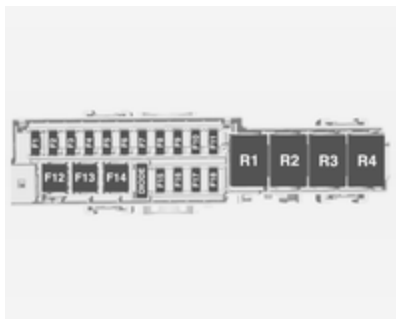

Fuses Usage

- | | |
|-----------|------------------------------------|
| F1 | Steering wheel switch backlighting |
| F2 | Column lock (right hand drive) |
| F3 | Cluster (right hand drive) |

Fuses Usage

- | | |
|-----------|---|
| F4 | Body control module 3/Right headlight |
| F5 | Body control module 2/Body control module electronics/ Tail light/Right daytime running light/ Shifter lock/ Switch backlighting/Rear fog light |
| F6 | Body control module 5/ Retained accessory power relay control/Right front turn signal light/Left rear stop and turn signal light/Right position lights/Remote PRNDL |
| F7 | Body control module 6/Map lights/Courtesy lights/ Reversing lights |
| F8 | Body control module 7/Left front turn signal/Right rear stop and turn signal light/ Child security lock relay control |
| F9 | Body control module 8/Locks |

Fuses Usage

- | | |
|------------|---|
| F10 | Right secondary data link connector (left hand drive), Right primary data link connector (right hand drive) |
| F11 | Intrusion and inclination sensor |
| F12 | Blower motor (left hand drive) |
| F13 | — |
| F14 | — |
| F15 | — |
| F16 | — |
| F17 | — |
| F18 | — |


To reinstall the door, insert the bottom tab first, then push the door back into its original location.

Load compartment fuse box



The fuse box is on the left side of the load compartment behind a cover. Remove the cover.

A fuse puller is located in the engine compartment fuse box.

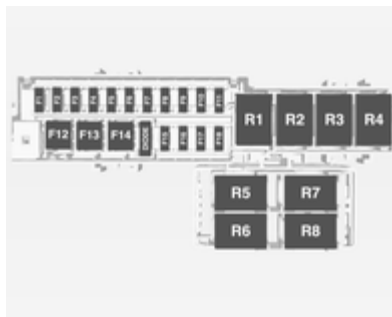

Fuses Usage

F1	–
F2	Fuel system control module
F3	Passive start/ Passive entry module
F4	Heated seats
F5	Driver door switches (Outside rearview mirror/ Charge port door release/ Refuel request/Driver window switch)

Fuses Usage

F6	Fuel (Diurnal valve and evap. leak check module)
F7	Accessory power module cooling fan
F8	Amplifier
F9	Digital audio broadcast
F10	Regulated voltage control/ Ultrasonic front and rear parking assist
F11	Horn
F12	Rear power windows
F13	Electrical parking brake
F14	Rear defog (Upper grid)
F15	–
F16	Tailgate release
F17	–
F18	–

Vehicle tools

Tools



The towing eye and a screwdriver are located under a cover in the load compartment. Please regard that the towing eye is located below the tyre repair kit.

Wheels and tyres

Tyre condition, wheel condition

Drive over edges slowly and at right angles if possible. Driving over sharp edges can cause tyre and wheel damage. Do not trap tyres on the kerb when parking.

Regularly check the wheels for damage. Seek the assistance of a workshop in the event of damage or unusual wear.

Tyres

Directional tyres

Fit directional tyres such that they roll in the direction of travel. The rolling direction is indicated by a symbol (e.g. an arrow) on the sidewall.

The following applies to tyres fitted opposing the rolling direction:

- Driveability may be affected. Have the defective tyre renewed or repaired as soon as possible.
- Do not drive faster than 50 mph.
- Drive particularly carefully on wet and snow-covered road surfaces.

Winter tyres

Winter tyres improve driving safety at temperatures below 7 °C and should therefore be fitted on all wheels.

In accordance with country-specific regulations, affix the speed sticker in the driver's field of view.

Tyre designations

E.g. **215/60 R 16 95 H**

- 215** = Tyre width, mm
- 60** = Cross-section ratio (tyre height to tyre width), %
- R** = Belt type: Radial
- RF** = Type: RunFlat
- 16** = Wheel diameter, inches

95 = Load index e.g. 95 is equivalent to 690 kg

H = Speed code letter

Speed code letter:

Q = up to 100 mph

S = up to 112 mph

T = up to 118 mph

H = up to 130 mph

V = up to 150 mph

W = up to 168 mph

Tyre pressure

Although your vehicle has an integrated tyre pressure monitoring system, you should check the tyre pressure of your cold tyres at least every 14 days and before any long journey.

Unscrew the valve cap.



The tyre and loading information label on the front left door frame indicates the original equipment tyres and the tyre pressures.

Additional to that: See tyre pressure ↗ 184.

The tyre pressure data refers to cold tyres. It applies to summer and winter tyres.

The ECO tyre pressure serves to achieve the smallest amount of fuel consumption possible.

Incorrect tyre pressures will impair safety, vehicle handling, comfort and fuel economy and will increase tyre wear.

Warning

If the pressure is too low, this can result in considerable tyre warm-up and internal damage, leading to tread separation and even to tyre blow-out at high speeds.

If the tyre pressure shall be reduced or increased on a vehicle with tyre pressure monitoring system, switch off ignition.

Tyre pressure monitoring system

The tyre pressure monitor system uses radio and sensor technology to check tyre pressure levels. The tyre pressure monitoring system sensors monitor the pressure in your vehicle's tyres and transmit tyre pressure readings to a receiver located in the vehicle.

When the low tyre pressure telltale illuminates, stop and check tyres as soon as possible, and inflate them to the proper pressure.

Please note that the tyre pressure monitoring system is not a substitute for proper tyre maintenance and it is the driver's responsibility to maintain correct tyre pressure, even if under-inflation has not reached the level to trigger illumination of the tyre pressure monitoring system low tyre pressure telltale.

The tyre pressure monitoring system malfunction indicator is combined with the low tyre pressure telltale. When the system detects a malfunction, the telltale will flash for approximately one minute and then remain continuously illuminated. This sequence will continue upon subsequent vehicle start-ups as long as the malfunction exists.

When the malfunction indicator is illuminated, the system may not be able to detect or signal low tyre pressure as intended. Tyre pressure monitoring system malfunctions may

occur for a variety of reasons, including the installation of replacement or alternate tyres or wheels on the vehicle that prevent the tyre pressure monitoring system from functioning properly. Always check the tyre pressure monitoring system malfunction telltale after replacing one or more tyres or wheels on your vehicle to ensure that the replacement or alternate tyres and wheels allow the tyre pressure monitoring system to continue to function properly.

Tyre pressure monitor operation

When a low tyre pressure condition is detected,  illuminates.

If  comes on, stop as soon as possible and inflate the tyres as recommended in this manual.

Tyre pressures ⇨ 184.

A message to check the pressure in a specific tyre displays in the Driver Information Centre (DIC).  and the DIC warning message come on at each drive cycle until the tyres are

inflated to the correct inflation pressure. Using the DIC, tyre pressure levels can be viewed.

Control indicator  ⇨ 71.

DIC ⇨ 72.

 may come on in cool weather when the vehicle is first started, and then turn off as the vehicle is driven. This could be an early indicator that the air pressure is getting low and needs to be inflated to the proper pressure.

Tyre pressure ⇨ 184.

The tyre pressure monitoring system can warn about a low tyre pressure condition but it does not replace normal tyre maintenance.

The use of commercially available liquid tyre repair kits can impair the function of the system. Factory approved repair kits can be used.

Adaptive threshold function

The tyre pressure monitoring system automatically detects if the vehicle is driven with a tyre pressure appropriate for a load of up to 3 people or for a full load.

If the tyre pressure shall be reduced, switch off ignition before reducing.

Sensor matching process - Manual

Each tyre pressure monitoring system sensor has a unique identification code. The identification code needs to be matched to a new tyre/wheel position after rotating the vehicle's tyres or replacing one or more of the sensors.

(!) and the DIC message should go off at the next drive cycle. The sensors are matched to the tyre/wheel positions, using a tyre pressure monitoring system relearn tool, in the following order: left front tyre, right front tyre, right rear tyre and left rear tyre. Ask your Authorised Vauxhall Ampera Repairer for service or to purchase a relearn tool.

There are two minutes to match the first tyre/wheel position and five minutes overall to match all four tyre/wheel positions. If it takes longer, the matching process stops and must be restarted.

Follow the tyre pressure monitoring system sensor matching process:

1. Set the parking brake.
2. Switch the ignition on and place the vehicle in **P**.



3. If the DIC display is minimised, press the **SELECT** knob to maximise it.
4. Use the **SELECT** knob to scroll to the tyre pressure display screen.
5. Press and hold the **SELECT** knob for five seconds to begin the sensor matching process.

A message displays confirming to begin the process.

6. Use the **SELECT** knob to select **Yes** with the highlighted selection and press the **SELECT** knob again to confirm the selection.

The horn sounds twice to signal the receiver is in relearn mode and a message displays on the DIC screen.

7. Start with the left front tyre.
8. Place the relearn tool against the tyre sidewall, near the valve stem. Then press the button to activate the tyre pressure monitoring system sensor.

A horn chirp confirms that the sensor identification code has been matched to this tyre and wheel position.

9. Proceed to the right front tyre and repeat the procedure in Step 8.
10. Proceed to the right rear tyre and repeat the procedure in Step 8.
11. Proceed to the left rear tyre and repeat the procedure in Step 8. The horn sounds two times to indicate the sensor identification code has been matched to the left

rear tyre and the tyre pressure monitoring system sensor matching process is no longer active. The message on the DIC display screen goes off.

12. Switch off the ignition.

13. Set all four tyres to the recommended air pressure level.

Tyre and loading information label
 ⇨ 157.

Tyre pressure ⇨ 184.

Sensor matching process - Auto learn function

Each tyre pressure monitoring system sensor has a unique identification code. The identification code needs to be matched to a new tyre/wheel position after rotating the vehicle's tyres or replacing one or more of the sensors.

After changing a tyre, the vehicle has to be stationary for approx. 20 minutes, before the system recalculates. The following relearn process takes up to 10 minutes of driving with a speed of minimum

12 mph. In this case -- can be displayed or pressure values can swap in the DIC.

If problems occur during the relearn process a warning message is displayed in the DIC.

Notice

Vehicles equipped with the auto learn function do not allow manual sensor matching.

Fault

The tyre pressure monitoring system will not work properly if one or more of the sensors are missing or inoperable.

When the system detects a malfunction, (U) flashes for about one minute and then stays on for the remainder of the vehicle on/off cycle. A DIC warning message also displays. (U) and the DIC warning message come on at each vehicle on/off cycle until the problem is corrected. Some of the conditions that can cause these to come on are:

- The tyre pressure monitoring system sensor matching process was started but not completed or not completed successfully after rotating the tyres. The DIC message and (U) should go off once the tyre pressure monitoring system sensor matching process is performed successfully.
- One or more tyre pressure monitoring system sensors are missing or damaged. The DIC message and (U) should go off when the sensors are installed and the sensor matching process is performed successfully. Seek the assistance of a workshop.
- Replacement tyres or wheels do not match the original equipment tyres or wheels. Tyres and wheels other than those recommended could prevent the tyre pressure monitoring system from functioning properly.
- Operating electronic devices or being near facilities using radio wave frequencies similar to the tyre

pressure monitoring system could cause the tyre pressure monitoring system sensors to malfunction.

If the tyre pressure monitoring system is not working properly, it cannot detect or signal a low tyre condition. Seek the assistance of a workshop.

Tread depth

Check tread depth at regular intervals.

Tyres should be replaced for safety reasons at a tread depth of 2-3 mm (4 mm for winter tyres).

For safety reasons it is recommended that the tread depth of the wheels on one axle should not vary by more than 2 mm.



The legally permissible minimum tread depth (1.6 mm) has been reached when the tread has worn down as far as one of the tread wear indicators (TWI). Their position is indicated by markings on the sidewall.

If there is more wear at the front than the rear, swap round front wheels and rear wheels periodically. Ensure that the direction of rotation of the wheels is the same as before.

Tyres age, even if they are not used. We recommend tyre replacement every 6 years.

Changing tyre and wheel size

If tyres of a different size than those fitted at the factory are used, it may be necessary to reprogramme the speedometer as well as the nominal tyre pressure and make other vehicle modifications.

Ensure that the direction of rotation of the wheels is the same as before and according to tyre manufacturer instructions.

After converting to a different tyre size, have the label with tyre pressures replaced.

Warning

Use of unsuitable tyres or wheels may lead to accidents and will invalidate the vehicle type approval.

Tyre chains



Tyre chains are only permitted on the front wheels.

Always use fine mesh chains that add no more than 10 mm to the tyre tread and the inboard sides (including chain lock).

Warning

Damage may lead to tyre blowout.

Tyre chains are only permitted on tyres of size 205/60R16.

Tyre chains are not permitted on tyres of size 215/55R17 and 225/45R18.

Tyre repair kit

Minor damage to the tyre tread can be repaired with the tyre repair kit.

Do not remove foreign bodies from the tyres.

Tyre damage exceeding 4 mm or that is at tyre's side wall cannot be repaired with the tyre repair kit.

Warning

Do not drive faster than 50 mph.

Do not use for a lengthy period.

Steering and handling may be affected.

If you have a flat tyre:

Stop the vehicle, apply the parking brake and move the shift lever to **P**. Turn on the hazard warning flashers.

Hazard warning flashers ⇨ 89.



The tyre repair kit is located under a cover in the load compartment.

Notice

The driving characteristics of the repaired tyre is severely affected, therefore have this tyre replaced.

If unusual noise is heard or the compressor becomes hot, turn compressor off for at least 30 minutes.

The built-in safety valve opens at a pressure of 7 bar.

Note the expiry date of the kit. After this date its sealing capability is no longer guaranteed. Pay attention to storage information on sealant bottle.

Replace the used sealant bottle. Dispose of the bottle as prescribed by applicable laws.


The compressor and sealant can be used from approx. -30 °C.

Using the tyre repair kit

The tyre repair kit has two hoses. The black sealant/air hose is intended to temporarily seal and inflate a punctured tyre, the clear air only hose is intended to inflate a not punctured tyre without sealant.

Follow the directions closely for correct usage:

1. Take the tyre repair kit from the compartment.

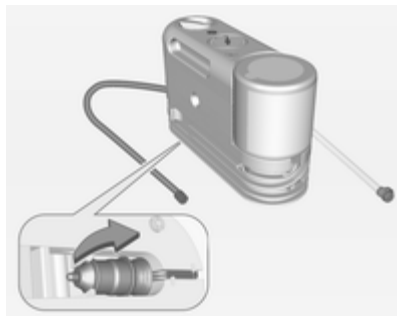


2. **Sealant and air hose:** Unwrap the black sealant/air hose and the power plug.

Air only hose: Unwrap the clear air only hose and the power plug.

3. Place the kit on the ground.

Make sure the tyre valve stem is positioned close to the ground so the hose will reach it.

4. Remove the valve stem cap from the flat tyre by turning it counterclockwise.

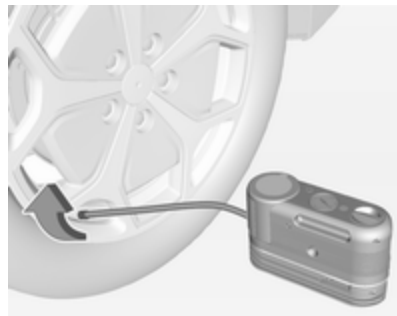

5. Attach the black sealant/air hose or the clear air only hose onto the tyre valve stem. Turn it clockwise until it is tight.

6. Plug the power plug into an accessory power outlet in the vehicle. Unplug all items from other accessory power outlets.

Power outlets ⇨ 62.

Do not pinch the power plug cord in the door or window.


7. Start the vehicle. The vehicle must be running while using the air compressor.



8. **Sealant and air hose:** Turn the selector switch counterclockwise to .



Air only hose: Turn the selector switch clockwise to .

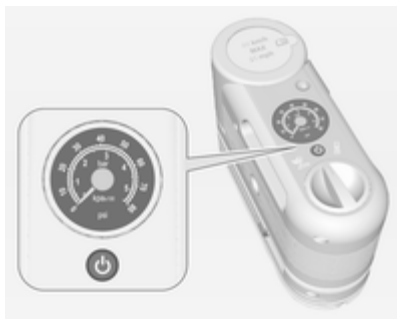

9. Press  to turn the tyre repair kit on.

Sealant and air hose: The compressor will inject sealant and air into the tyre. The pressure gauge will initially show a high pressure while the compressor pushes the sealant into the tyre. Once the sealant is completely dispersed into the tyre, the pressure will quickly drop and start to rise again as the tyre inflates with air only.

Air only hose: The compressor will inflate the tyre only with air.

10. Inflate the tyre to the recommended inflation pressure using the pressure gauge.

Tyre and loading information label  157.

Tyre pressures  184.

The pressure gauge may read higher than the actual tyre pressure while the compressor is on. Turn the compressor off to get an accurate pressure reading. The compressor may be turned on/off until the correct pressure is reached.



Air only hose: If you inflate the tyre higher than the recommended pressure, you can adjust the excess pressure by pressing , until the proper pressure reading is reached.

Notice


If the recommended pressure cannot be reached after approximately 25 minutes, the vehicle should not be driven farther. The tyre is too severely damaged and the tyre repair kit cannot inflate the tyre. Remove the power plug from the accessory power outlet and unscrew the inflating hose from the tyre valve.

11. Press  again to turn the tyre repair kit off.

Be careful while handling the tyre repair kit as it could be warm after usage.

Sealant and air hose: The tyre is not sealed and will continue to leak air until the vehicle is driven and the sealant is distributed in the tyre.

12. Unplug the power plug from the accessory power outlet in the vehicle.

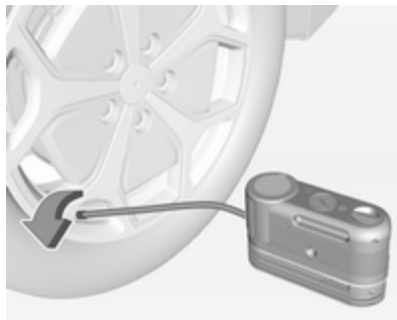

13. Turn the black sealant/air hose or the clear air only hose counterclockwise to remove it from the tyre valve stem.
14. Replace the tyre valve stem cap.
15. Replace the black sealant/air hose or the clear air only hose and the power plug back in their original location and store the tyre repair kit to its storage location in the load compartment.



16. **Sealant and air hose:** If the flat tyre was able to inflate to the recommended inflation pressure, remove the maximum speed label from the sealant canister and place it in a highly visible location. Do not exceed the speed on this label until the damaged tyre is repaired or replaced.
17. **Sealant and air hose:** Immediately drive the vehicle 5 miles to distribute the sealant in the tyre.
18. **Sealant and air hose:** Stop at a safe location and check the tyre pressure. Refer to steps 1 through

11 under using of the air only hose.

If the tyre pressure has fallen more than 0.7 bar below the recommended inflation pressure, stop driving the vehicle. The tyre is too severely damaged and the tyre sealant cannot seal the tyre.

If the tyre pressure has not dropped more than 0.7 bar from the recommended inflation pressure, inflate the tyre to the recommended inflation pressure.

19. **Sealant and air hose:** Wipe off any sealant from the wheel, tyre and vehicle.
20. **Sealant and air hose:** Dispose of the used sealant canister and the black sealant/air hose assembly at a local dealer or in accordance with local laws and practices.
21. **Sealant and air hose:** Replace it with a new canister available from a workshop.
22. **Sealant and air hose:** After temporarily sealing a tyre using the tyre repair kit, take the vehicle

to a workshop within a 100 miles of driving to have the tyre repaired or replaced.



The tyre repair kit has an accessory adapter located in a compartment on the bottom of its housing that may be used to inflate air mattresses, balls, etc.

Removal and installation of the sealant canister

To remove the sealant canister:

1. Unwrap the sealant hose.
2. Press the canister release button.
3. Pull up and remove the canister.

4. Replace with a new canister which is available from a workshop.
5. Push the new canister into place.

Jump starting

Do not start with quick charger.

A vehicle with a discharged battery can be started using jump leads and the battery of another vehicle.

There are different procedures depending on if the vehicle has a run-down battery or another vehicle has a run-down battery.

Danger

The high voltage battery cannot be jump started either with another vehicle or battery charger. Personal injury, death, or damage to the vehicle could result.

Warning

Be extremely careful when starting with jump leads. Any deviation from the following instructions can lead to injuries or damage caused

by battery explosion or damage to the electrical systems of both vehicles.

Warning

Avoid contact of the battery with eyes, skin, fabrics and painted surfaces. The fluid contains sulphuric acid which can cause injuries and damage in the event of direct contact.

Warning

Electric fans can start up even when the engine is not running and can cause injury. Keep hands, clothing and tools away from any underhood electric fans.

Warning

Never jump start another vehicle by using the terminals located in the engine compartment.


This could cause a fuse to overload in the vehicle.

To jump start another vehicle, use the terminals located under the floor cover in the load compartment.

- Never expose the battery to naked flames or sparks.
- A discharged battery can already freeze at a temperature of 0 °C. Defrost the frozen battery before connecting jump leads.
- Wear eye protection and protective clothing when handling a battery.
- Use a booster battery with the same voltage (12 Volts). Its capacity (Ah) must not be much less than that of the discharged battery.
- Use jump leads with insulated terminals and a cross section of at least 16 mm².
- Do not disconnect the discharged battery from the vehicle.
- Switch off all unnecessary electrical consumers.


- Do not lean over the battery during jump starting.
- Do not allow the terminals of one lead to touch those of the other lead.
- The vehicles must not come into contact with each other during the jump starting process.
- Apply the parking brake, move the shift lever in **P**.

Battery terminals in the engine compartment

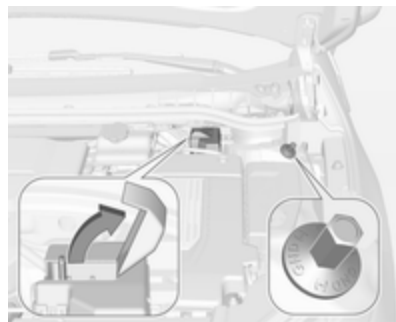

The battery terminals to jump start the vehicle are located in the engine compartment. The positive battery terminal is located below a access cover. Open the cover everytime you want to jump start the vehicle. The negative battery terminal is a stud marked GND.

Battery terminals in the load compartment

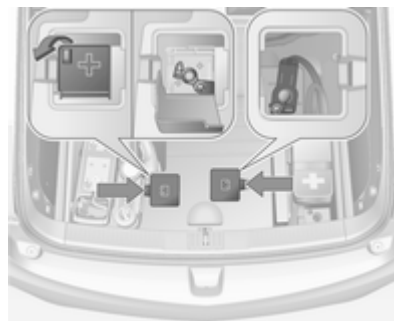


The battery terminals to jump start another vehicle are located in the load compartment below two access covers. Open and remove the access covers everytime you want to jump

start another vehicle. The positive battery terminal is covered with an additional access cover, marked with a **+**. Open the access cover everytime you want to use the positive battery terminal.

Jump starting

Jump starting the vehicle

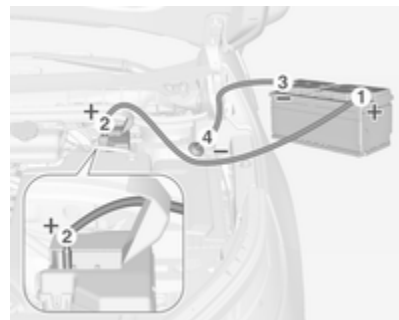

Lead connection order:


1. Connect the red lead to the positive terminal of the booster battery.
2. Connect the other end of the red lead to the positive terminal of the discharged battery.
3. Connect the black lead to the negative terminal of the booster battery.
4. Connect the other end of the black lead to the negative battery terminal, marked GND.

Route the leads so that they cannot catch on rotating parts in the engine compartment.

To start the vehicle:

1. Start the engine of the vehicle providing the jump.
2. After 5 minutes, press $\odot$ to switch on the ignition of the vehicle.
After the instrument cluster initialises, the vehicle will use power from the high voltage battery to charge the 12 volt battery.

3. Switch on electrical consumers (e.g. headlights, heated rear window) of the vehicle receiving the jump start.
4. Reverse above sequence exactly when removing leads.

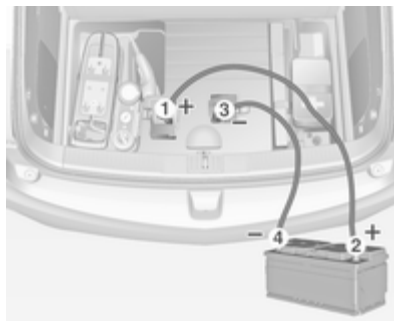Jump starting another vehicle**Lead connection order:**

1. Connect the red lead to the positive terminal of the booster battery.
2. Connect the other end of the red lead to the positive terminal of the discharged battery.

3. Connect the black lead to the negative terminal of the booster battery.
4. Connect the other end of the black lead to a vehicle grounding point, such as the engine block or an engine mounting bolt. Connect as far away from the discharged battery as possible, however at least 60 cm.

Route the leads so that they cannot catch on rotating parts in the engine compartment.

To start the vehicle:

1. Press $\odot$ to switch on the ignition of the vehicle.
2. After 5 minutes, start the other engine.
3. Allow both vehicles to run for approx. 3 minutes with the leads connected.
4. Switch on electrical consumers (e.g. headlights, heated rear window) of the vehicle receiving the jump start.
5. Reverse above sequence exactly when removing leads.

Towing


Towing the vehicle



Insert a screwdriver in the slot at the short edge of the cap. Release the cap by carefully moving the screwdriver sideways. To prevent damage it is recommended to place a cloth between the screwdriver and the frame.

The towing eye is stowed in a storage compartment under the floor cover of the load compartment. ⇨ 54.

Disengage gently the cap with a screwdriver

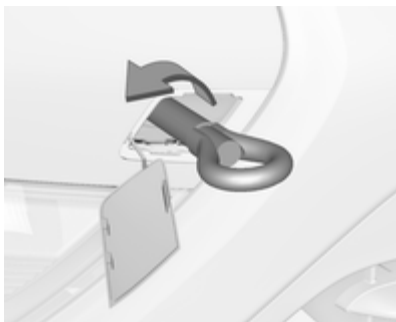

Screw in the towing eye as far as it will go until it stops in a horizontal position.

Attach a tow rope – or better still a tow rod – to the towing eye.

The towing eye must only be used for towing and not for recovering the vehicle.

Switch on ignition to release steering wheel lock and to permit operation of brake lights, horn and windscreen wiper.

Set the shift lever of the electric drive unit in **N**.

Switch on the hazard warning flashers on both vehicles.

Caution

Drive slowly. Do not drive jerkily. Excessive tractive force can damage the vehicle.

When the vehicle is not running, considerably more force is needed to brake and steer.

To prevent the entry of exhaust gases from the towing vehicle, switch on the air recirculation and close the windows.

Seek the assistance of a workshop.

After towing, unscrew the towing eye.

Insert cap at the bottom and close.

Towing another vehicle

The vehicle is neither designed nor intended to tow a trailer or another vehicle.

Appearance care

Exterior care

Locks

The locks are lubricated at the factory using a high quality lock cylinder grease. Use de-icing agent only when absolutely necessary, as this has a degreasing effect and impairs lock function. After using de-icing agent, have the locks regreased by a workshop.

Washing

The paintwork of your vehicle is exposed to environmental influences. Wash and wax your vehicle regularly. When using automatic vehicle washes, select a programme that includes waxing.

Bird droppings, dead insects, resin, pollen and the like should be cleaned off immediately, as they contain aggressive constituents which can cause paint damage.

If using a vehicle wash, comply with the vehicle wash manufacturer's instructions. The windscreen wiper and rear window wiper must be switched off. Remove antenna and external accessories such as roof racks etc.

If you wash your vehicle by hand, make sure that the insides of the wheel housings are also thoroughly rinsed out.

Clean edges and folds on opened doors and the bonnet as well as the areas they cover.

Caution
Always use a cleaning agent with a pH value of 4 to 9. Do not use cleaning agents on hot surfaces.

Have the door hinges of all doors greased by a workshop.

Do not clean the engine compartment with a steam-jet or high-pressure jet cleaner.

Thoroughly rinse and leather-off the vehicle. Rinse leather frequently. Use separate leathers for painted and glass surfaces: remnants of wax on the windows will impair vision.

Exterior lights

Headlight and other light covers are made of plastic. Do not use any abrasive or caustic agents, do not use an ice scraper, and do not clean them dry.

Polishing and waxing

Wax the vehicle regularly (at the latest when water no longer beads). Otherwise, the paintwork will dry out.

Polishing is necessary only if the paint has become dull or if solid deposits have become attached to it.

Paintwork polish with silicone forms a protective film, making waxing unnecessary.

Plastic body parts must not be treated with wax or polishing agents.

Windows and windscreen wiper blades

Use a soft lint-free cloth or chamois leather together with window cleaner and insect remover.

When cleaning the rear window, make sure the heating element inside is not damaged.

For mechanical removal of ice, use a sharp-edged ice scraper. Press the scraper firmly against the glass so that no dirt can get under it and scratch the glass.

Clean smearing wiper blades with a soft cloth and window cleaner.

Wheels and tyres

Do not use high-pressure jet cleaners.

Clean rims with a pH-neutral wheel cleaner.

Rims are painted and can be treated with the same agents as the body.

Paintwork damage

Rectify minor paintwork damage with a touch-up pen before rust forms.

Have more extensive damage or rust areas repaired by a workshop.

Underbody

Some areas of the vehicle underbody have a PVC undercoating while other critical areas have a durable protective wax coating.

After the underbody is washed, check the underbody and have it waxed if necessary.

Bitumen/rubber materials could damage the PVC coating. Have underbody work carried out by a workshop.

Before and after winter, wash the underbody and have the protective wax coating checked.

Front air deflector



The front air deflector allows air to flow cleaner under the vehicle. Should the front air deflector become detached, insert tab into slot. Repeat for the other side, if needed.

Caution

Drive carefully whenever the road has a strong inclination or when driving over a ramp, bumper, etc.

Interior care

Interior and upholstery

Only clean the vehicle interior, including the instrument panel fascia and panelling, with a dry cloth or interior cleaner.

Clean the leather upholstery with clear water and a soft cloth. In case of heavy soiling, use leather care.

The instrument panel should only be cleaned using a soft damp cloth.

Clean fabric upholstery with a vacuum cleaner and brush. Remove stains with an upholstery cleaner.

Clean seat belts with lukewarm water or interior cleaner.

Caution

Close Velcro fasteners as open Velcro fasteners on clothing could damage seat upholstery.

The same applies to clothing with sharp-edged objects, like zips or belts or studded jeans.

Plastic and rubber parts

Plastic and rubber parts can be cleaned with the same cleaner as used to clean the body. Use interior cleaner if necessary. Do not use any other agent. Avoid solvents and petrol in particular. Do not use high-pressure jet cleaners.

Service and maintenance

General information	174
Recommended fluids, lubricants and parts	175

General information

Service information

In order to ensure economical and safe vehicle operation and to maintain the value of your vehicle, it is of vital importance that all maintenance work is carried out at the proper intervals as specified.

The detailed, up-to-date service schedule for your vehicle is available at the workshop.

Service intervals

Maintenance of your vehicle is required every 20,000 miles or after 1 year, whichever occurs first, unless otherwise indicated in the service display.

Confirmations

Confirmation of service is recorded in the Service and Warranty Booklet. The date and mileage is completed with the stamp and signature of the servicing workshop.

Make sure that the Service and Warranty Booklet is completed correctly as continuous proof of service is essential if any warranty or goodwill claims are to be met, and is also a benefit when selling the vehicle.

Service interval with remaining engine oil life duration

The service interval is based on several parameters depending on usage.

A message in the Driver Information Centre (DIC) lets you know when to change the engine oil.

Driver Information Centre (DIC) ⇨ 72.
Vehicle messages ⇨ 83.

Recommended fluids, lubricants and parts

Recommended fluids and lubricants

Only use products that have been tested and approved. Damage resulting from the use of non-approved materials will not be covered by the warranty.

Warning

Operating materials are hazardous and could be poisonous. Handle with care. Pay attention to information given on the containers.

Engine oil

Engine oil is identified by its quality and its viscosity. Quality is more important than viscosity when selecting which engine oil to use. The oil quality ensures e.g. engine cleanliness, wear protection and oil

aging control, whereas viscosity grade gives information on the oil's thickness over a temperature range.

Dexos is the newest engine oil quality that provides optimum protection for gasoline and diesel engines. If it is unavailable, engine oils of other listed qualities have to be used.

Recommendations for gasoline engines are also valid for Compressed Natural Gas (CNG), Liquefied Petroleum Gas (LPG) and Ethanol (E85) fuelled engines.

Select the appropriate engine oil based on its quality and on the minimum ambient temperature ⇨ 178.

Topping up engine oil

Engine oils of different manufacturers and brands can be mixed as long as they comply with the required engine oil quality and viscosity.

Use of engine oil with only ACEA A1 or only A5 quality is prohibited, since it can cause long-term engine damage under certain operating conditions.

Select the appropriate engine oil based on its quality and on the minimum ambient temperature ⇨ 178.

Additional engine oil additives

The use of additional engine oil additives could cause damage and invalidate the warranty.

Engine oil viscosity grades

The SAE viscosity grade gives information of the thickness of the oil.

Multigrade oil is indicated by two figures, e.g. SAE 5W-30. The first figure, followed by a W, indicates the low temperature viscosity and the second figure the high temperature viscosity.

Select the appropriate viscosity grade depending on the minimum ambient temperature ⇨ 178.

All of the recommended viscosity grades are suitable for high ambient temperatures.

Coolant and antifreeze

Use only silicate-free long life coolant (LLC) antifreeze approved for the vehicle, consult a workshop.

The system is factory filled with coolant designed for excellent corrosion protection and frost protection down to approx. -28 °C. This concentration should be maintained all year round. The use of additional coolant additives that intend to give additional corrosion protection or seal against minor leaks can cause function problems. Liability for consequences resulting from the use of additional coolant additives will be rejected.

Brake fluid

Only use high-performance brake fluid approved for the vehicle, consult a workshop.

Over time, brake fluid absorbs moisture which will reduce braking effectiveness. The brake fluid should therefore be replaced at the specified interval.

Brake fluid should be stored in a sealed container to avoid water absorption.


Ensure brake fluid does not become contaminated.

Technical data

Vehicle identification	177
Vehicle data	179

Vehicle identification


Vehicle Identification Number

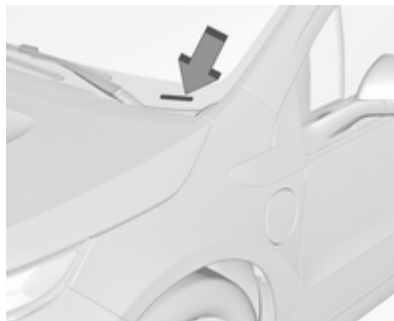

The Vehicle Identification Number (VIN) is located in the left front corner of the instrument panel. It is visible through the windshield.

The VIN also appears on the vehicle certification and service parts labels and certificates of title and registration.

Identification plate

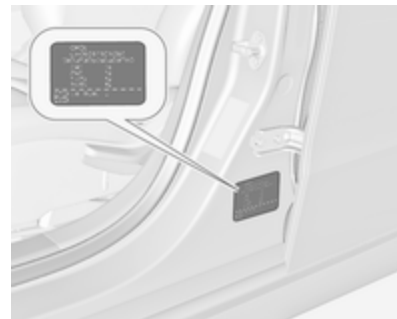

The identification label is located on the front left door frame.

The technical data is determined in accordance with European Community standards. We reserve the right to make modifications. Specifications in the vehicle documents always have priority over those given in this manual.

Service Parts identification label

The label is inside the right rear cargo storage door and has the following information:

- Vehicle Identification Number (VIN)
- Model designation
- Paint information
- Production options and special equipment

Do not remove this label from the vehicle.

Vehicle data

Recommended fluids and lubricants

European service schedule

Required engine oil quality

Engine oil quality	All European countries (except Belarus, Moldova, Russia, Serbia, Turkey)	Only Israel
dexos 1	–	✓
dexos 2	✓	–

In case dexos quality is unavailable you may use max. 1 litre engine oil quality ACEA C3 once between each oil change.

Engine oil viscosity grades

Ambient temperature	All European countries and Israel (except Belarus, Moldova, Russia, Serbia, Turkey)	
down to -25 °C	SAE 5W-30 or SAE 5W-40	
below -25 °C	SAE 0W-30 or SAE 0W-40	

International service schedule

Required engine oil quality

Engine oil quality	All countries outside Europe except Israel	Only Belarus, Moldova, Russia, Serbia, Turkey
dexos 1	✓	–
dexos 2	–	✓

In case dexos quality is unavailable you may use the oil qualities listed below:

Engine oil quality	All countries outside Europe except Israel	Only Belarus, Moldova, Russia, Serbia, Turkey
GM-LL-A-025	✓	✓
GM-LL-B-025	–	–

Engine oil quality	All countries outside Europe except Israel	Only Belarus, Moldova, Russia, Serbia, Turkey
ACEA A3/B3	✓	✓
ACEA A3/B4	✓	✓
ACEA C3	✓	✓

Engine oil quality	All countries outside Europe except Israel	
	Only Belarus, Moldova, Russia, Serbia, Turkey	
API SM	✓	✓
API SN	✓	✓
Engine oil viscosity grades		
Ambient temperature	All countries outside Europe (except Israel), including Belarus, Moldova, Russia, Serbia, Turkey	
down to -25 °C	SAE 5W-30 or SAE 5W-40	
below -25 °C	SAE 0W-30 or SAE 0W-40	

Engine data

Engine	A14XFL Petrol	Electric motor
Number of cylinders	4	-
Piston displacement [cm ³]	1398	-
Power (Engine/Electric motor) [kW]	63	111
at rpm	4800	5000
Torque [Nm]	126	370
at rpm	4250	250-2800

Engine	A14XFL Petrol	Electric motor
Fuel type	Petrol	-
Octane rating RON recommended	95	-
possible	98	-

Performance

A14XFL Petrol

Electric motor

Maximum speed ¹⁾ [mph]	100 mph
-----------------------------------	---------

Vehicle weight

Kerb weight [kg]	1735
------------------	------

¹⁾ The maximum speed indicated is achievable at kerb weight (without driver) plus 200 kg payload. Optional equipment could reduce the specified maximum speed of the vehicle.

Vehicle dimensions

Length [mm]	4498
Width [mm]	1787
Height (unladen) [mm]	1439
Wheelbase [mm]	2685

Capacities

Engine oil

Engine	A14XFL
including Filter [l]	3,5
between MIN and MAX [l]	1

Fuel tank

Petrol, nominal capacity [l]	35,2
------------------------------	------

High voltage battery

Battery capacity [kWh]	16
------------------------	----

Tyre pressures

Tyres	Comfort with up to 3 people		ECO with up to 3 people		With full load	
	front	rear	front	rear	front	rear
	[kPa/bar] ([psi])	[kPa/bar] ([psi])	[kPa/bar] ([psi])	[kPa/bar] ([psi])	[kPa/bar] ([psi])	[kPa/bar] ([psi])
215/55 R17,	240/2.4 (35)	240/2.4 (35)	270/2.7 (39)	270/2.7 (39)	250/2.5 (36)	290/2.9 (42)
225/45 R18 ²⁾	260/2.6 (38)	260/2.6 (38)	280/2.8 (41)	280/2.8 (41)	270/2.7 (39)	310/2.4 (45)
205/60 R16 ³⁾	260/2.6 (38)	260/2.6 (38)	280/2.8 (41)	280/2.8 (41)	270/2.7 (39)	310/2.4 (45)

²⁾ Reinforced variant (XL).

³⁾ Only permitted as winter tyres.

Customer information

Customer information	185
Vehicle data recording and privacy	186

Customer information

Service network

Open source information

This vehicle contains open source software, including without limitation, software distributed and/ or modified under the GNU General Public License, Version 2, June 1991 and the GNU Lesser General Public License, Version 2.1, February 1999.

See www.oss.gm.com for additional information and to download related materials, including without limitation, the previous referred to licenses and software.

Customer assistance offices

My Ampera service - contact telephone numbers for the owner's manual

We aim to provide you with an excellent customer experience.

In the unlikely event that you have a problem, your authorised dealership will be more than happy to assist you.

Alternatively our **My Ampera** helpline can provide additional support in coordinating roadside assistance or responding to any enquiry or question relating to you vehicle.

Caution

In the event of an accident, please call your local MyAmpera helpline immediately as there might be the need to de-power the high voltage battery.

Alternatively please contact your Vauxhall Ampera Authorised Repairer.

- **Austria:**
0800 301024
- **Belgium:**
0800 58115
- **Bulgaria**
00800 111 4980

- **Czech Republic:**
800 701018
- **Denmark:**
804 04 933
- **Finland:**
0800 523 109
- **France:**
0805 980004
- **Germany:**
0800 2022011
- **Greece:**
00800 331 52 963
- **Hungary:**
0680204997
- **Ireland:**
1800 812 450
- **Italy:**
800089741
- **Luxembourg:**
800 40004
- **Netherlands:**
0800 020 5915

- **Norway:**
800 62072
- **Portugal**
800208916
- **Poland:**
00800 331 1407
- **Romania:**
0800 801020
- **Slovakia:**
800 116 981
- **Slovenia**
80081153
- **Spain:**
900 900 428
- **Sweden:**
020 120 3022
- **Switzerland:**
800 455565
- **Turkey**
(0)8002199007
- **United Kingdom:**
0800 0260275

Vehicle data recording and privacy

Event data recorders

The vehicle has a number of sophisticated systems that monitor and control several vehicle data. Some data may be stored during regular operation to facilitate repair of detected malfunctions, other data is stored only in a crash or near crash event by modules in your vehicle systems that have an event data recording function such as the airbag control module.

The systems may record diagnostic data about the condition of the vehicle (e.g. oil level or vehicle mileage) and information how it was operated (e.g. engine speed, brake application and seat belt usage).

To read this data, special equipment and access to the vehicle is required. Some diagnostic data is electronically fed into Vauxhall global systems when the vehicle is serviced in a workshop, in order to document the

service history of the vehicle. This enables the workshop to offer you efficient maintenance and repair, tailored to your individual vehicle, each time you bring it back to the workshop.

The manufacturer will not access driver's behaviour related information about a crash event or share it with others except:

- with the consent of the vehicle owner or, if the vehicle is leased, of the lessee
- in response to an official request of police or similar government office
- as part of the manufacturer's defence in case of legal proceedings
- as required by law

In addition, the manufacturer may use the collected or received diagnostic data:

- for the manufacturer's research needs
- to make it available for research needs where appropriate confidentiality is maintained and need is shown
- to share summary data which is not tied to a specific vehicle with other organisations for research purposes

Radio Frequency Identification (RFID)

RFID technology is used in some vehicles for functions such as tyre pressure monitoring and ignition system security. It is also used in connection with conveniences such as radio remote controls for door locking/unlocking and starting, and in-vehicle transmitters for garage door openers. RFID technology in Vauxhall vehicles does not use or record personal information or link with any other Vauxhall system containing personal information.

Index

A

Accessories and vehicle modifications	137
Airbag and belt tensioners	67
Airbag deactivation	44, 68
Airbag system	42
Air intake	102
Air vents	101
Antilock brake system	114
Antilock brake system (ABS)	69
Anti-theft alarm system	28
Anti-theft locking system	27
Appearance care.....	171
Armrest storage	53
Automatic anti-dazzle	31
Automatic climate control system	94
Automatic light control	88

B

Battery	143
Battery discharge protection	93
Battery gauge.....	64
Battery replacement.....	21
Bonnet	139
Brake fluid	143, 175
Brakes.....	114, 143
Brake system	69
Breakdown.....	170
Bulb replacement	145

C

Capacities	183
Car Pass	20
Central locking system	24
Centre console storage	54
Changing tyre and wheel size ..	161
Charge cord.....	129
Charging.....	125
Charging status.....	128
Charging system	68
Child locks	26
Child restraint installation locations	48
Child restraints.....	46
Child restraint systems	46
Climate control	15
Climate control systems.....	94
Clock.....	61
Colour-Info-Display.....	74
Control indicators.....	65
Control of the vehicle	104
Controls.....	59
Convex shape	30
Coolant.....	140
Coolant and antifreeze.....	175
Cooling system.....	140
Cruise control	72, 119
Cupholders	53
Curtain airbag system	43

Customer assistance offices.....	185
Customer information.....	185

D

Danger, Warnings and Cautions ...	4
Dome lights	91
Door open	72
Door panel storage.....	53
Doors.....	26
Drive modes.....	109
Driver assistance systems.....	119
Driver Information Centre.....	72
Driving economically.....	103
Driving efficiency gauge.....	64
Driving hints.....	103

E

Electric adjustment	30
Electrical parking brake.....	69
Electrical parking brake fault.....	69
Electrical requirements.....	132
Electrical system.....	148
Electrical system overload	148
Electric drive unit.....	17, 112
Electric mode.....	108
Electric vehicle operation modes.....	18, 108
Electronic Stability Control.....	118
Electronic Stability Control and Traction Control system.....	70

Electronic Stability Control off.....	70
Engine compartment fuse box ...	150
Engine coolant temperature	71
Engine data	181
Engine exhaust	112
Engine oil	139, 175, 179
Engine oil pressure	71
Engine overheating.....	142
Entry lighting	92
Event data recorders.....	186
Exit lighting	92
Extended range mode.....	108
Exterior care	171
Exterior light	71
Exterior lighting	12, 88
Exterior mirrors.....	30

F

First aid kit	57
Folding	30
Front airbag system	42
Front seats.....	35
Fuel.....	133
Fuel consumption - CO ₂ - Emissions	135
Fuel for petrol engines	133
Fuel gauge	64
Fuses	148

G

Gauges.....	63
General information	136
Glovebox	52

H

Halogen bulbs.....	145
Halogen headlights	146
Hand brake.....	114
Hazard warning flashers	89
Headlight aiming.....	145
Headlight flash	89
Headlight range adjustment	89
Head restraint adjustment	8
Head restraints	34
Heated	30
Heated rear window	33
Heating	37
High beam	72, 89
High voltage devices and wiring	148
Hold mode.....	70
Horn	13, 60

I

Identification plate	177
Immobiliser	29, 71
Indicators.....	63
Information displays.....	72
Instrument cluster display.....	74
Instrument panel fuse box	152

Instrument panel illumination control	91
Instrument panel overview	10
Instrument panel storage.....	52
Interior care	173
Interior lighting.....	91
Interior mirrors.....	31
Introduction	3
ISOFIX child restraint systems	51

J

Jump starting	167
---------------------	-----

K

Keys	20
Keys, locks.....	20
Knee airbag system.....	44

L

Lashing eyes	56
Lifting the vehicle.....	137
Lighting features.....	92
Light switch	88
Load compartment	26, 54
Load compartment cover	56
Load compartment fuse box	155
Loading information	57
Low fuel	71

M

Maintenance modes.....	110
Malfunction indicator light	68
Mirror adjustment	8
Misted light covers	91
Mountain mode.....	70
My Ampera helpline.....	185

N

New vehicle running-in	104
Number plate light	147

O

Odometer	63
Oil, engine.....	175, 179
Open&Start system	23
Operation.....	108, 112

P

Parking	19, 107
Parking brake	114
Parking lights	90
Passenger compartment preconditioning.....	21
Pedestrian safety alert.....	14, 60
Performance	182
Performing work	138
Pollen filter	102
Power button.....	104
Power outlets	62

Power windows	31
Programmed charging override. .	128

R

Radio Frequency Identification (RFID).....	187
Radio remote control	21
Reading lights	91
Rear fog light	72, 147
Rear fog lights	90
Rear storage.....	56
Rear view camera	123
Recommended fluids and lubricants	175, 179
Refuelling	134
Regenerative braking.....	116
Retained power off.....	105
Reversing light	146
Reversing lights	90
Ride control systems.....	117

S

Seat adjustment	7, 36
Seat belt	8
Seat belt reminder	67
Seat belts	39
Seat position	35
Service	102, 174
Service display	65
Service information	174

Service network.....	185
Service Parts identification label	178
Side airbag system	43
Side turn signal lights	146
Speedometer	63
Sport mode	70
Starting and operating.....	104
Starting and stopping the vehicle.....	106
Starting off	17
Steering wheel adjustment	9, 59
Steering wheel controls	59
Storage compartments.....	52
Sun visors	33
Symbols	4

T

Tail lights	146
Three-point seat belt	40
Tools	156
Top-tether fastening eyes	51
Total vehicle range.....	65
Towing.....	136, 170
Towing another vehicle	170
Towing the vehicle	170
Traction Control system	117
Traction Control system off.....	70
Tread depth	161
Trip odometer	63
Turn and lane-change signals	90

Turn signal	67
Tyre and loading information label.....	157
Tyre chains	162
Tyre designations	156
Tyre pressure	157
Tyre pressure monitoring system.....	71, 157
Tyre pressures	184
Tyre repair kit	162
Tyres	156

U

Ultrasonic parking assist.....	121
Using this manual	3

V

Vehicle checks.....	138
Vehicle data.....	179
Vehicle data recording and privacy.....	186
Vehicle dimensions	183
Vehicle Identification Number	177
Vehicle messages	83
Vehicle personalisation	83
Vehicle ready.....	71
Vehicle security.....	27
Vehicle specific data	3
Vehicle tools.....	156

Vehicle unlocking	6
Vehicle weight	182

W

Warning lights.....	63
Warning triangle	57
Washer and wiper systems	14
Washer fluid	142
Wheels and tyres	156
Windows.....	31
Windscreen wiper/washer	60
Winter tyres	156
Wiper blade replacement	145

Copyright by General Motors UK Ltd.

The information contained in this publication is effective as of the date indicated below. General Motors UK Ltd. reserves the right to make changes to the technical specifications, features and design of the vehicles relative to the information contained in this publication, as well as changes to the publication itself.

Edition: February 2012, General Motors UK Ltd.

Printed on chlorine-free bleached paper.

KTA-2724/2-VX-en TS 1710-C-12

February 2012

