OSSM

Stand Build Guide

PitClamp stand · Version 1.0.13

RESEARCH + DESIRE



Support

support@researchanddesire.com

Assembly instructions


ohai.researchanddesire.com/ossm


Actual size





Print at 100 % (actual size). Lay a part on its dashed outline to identify it.


Bolts



M6×12 Screw



M5×25 Screw



M6×16 Screw


M5×20 Screw


M6×25 Screw


M4×25 Screw


M6×30 Screw



M4×12 Screw

Nuts and washers


M5 Nut


M4 Nut


M6 Washer


M6 T-nut

Hex keys



5 mm Hex key


4 mm Hex key



3 mm Hex key

Parts


Aluminium extrusion (3030)



1×
Body




1×
Arm




2×
Leg


3D printed




1×
Pivot plate




1×
Lower clamp base



1×
Upper clamp base




1×
Clamp ring



1×
Clasp




1×
Handle




1×
Clasp with handle



2×
Link (bolt side)



2×
Link (nut side)




4×
Foot



6×
End cap

Other




4×
Corner bracket




4×
Grip pad

Parts


Bolts




12×
M6×12 Screw




2×
M6×16 Screw




5×
M6×25 Screw




2×
M6×30 Screw



1×
M5×25 Screw



1×
M5×20 Screw



4×
M4×25 Screw



1×
M4×12 Screw

Nuts




2×
M5 Nut



5×
M4 Nut

T-nuts



23×
M6 T-nut

Washers



14×
M6 Washer

Tools

Required



3 mm Hex key



4 mm Hex key




5 mm Hex key


Recommended



Rubber mallet




Tape measure



Threadlocker
(blue 243)

Optional




Super glue


Legend


In a step's parts box, this drop beside a screw's quantity means:
put threadlocker (blue 243) on the screw's thread before it goes in.

1 The base

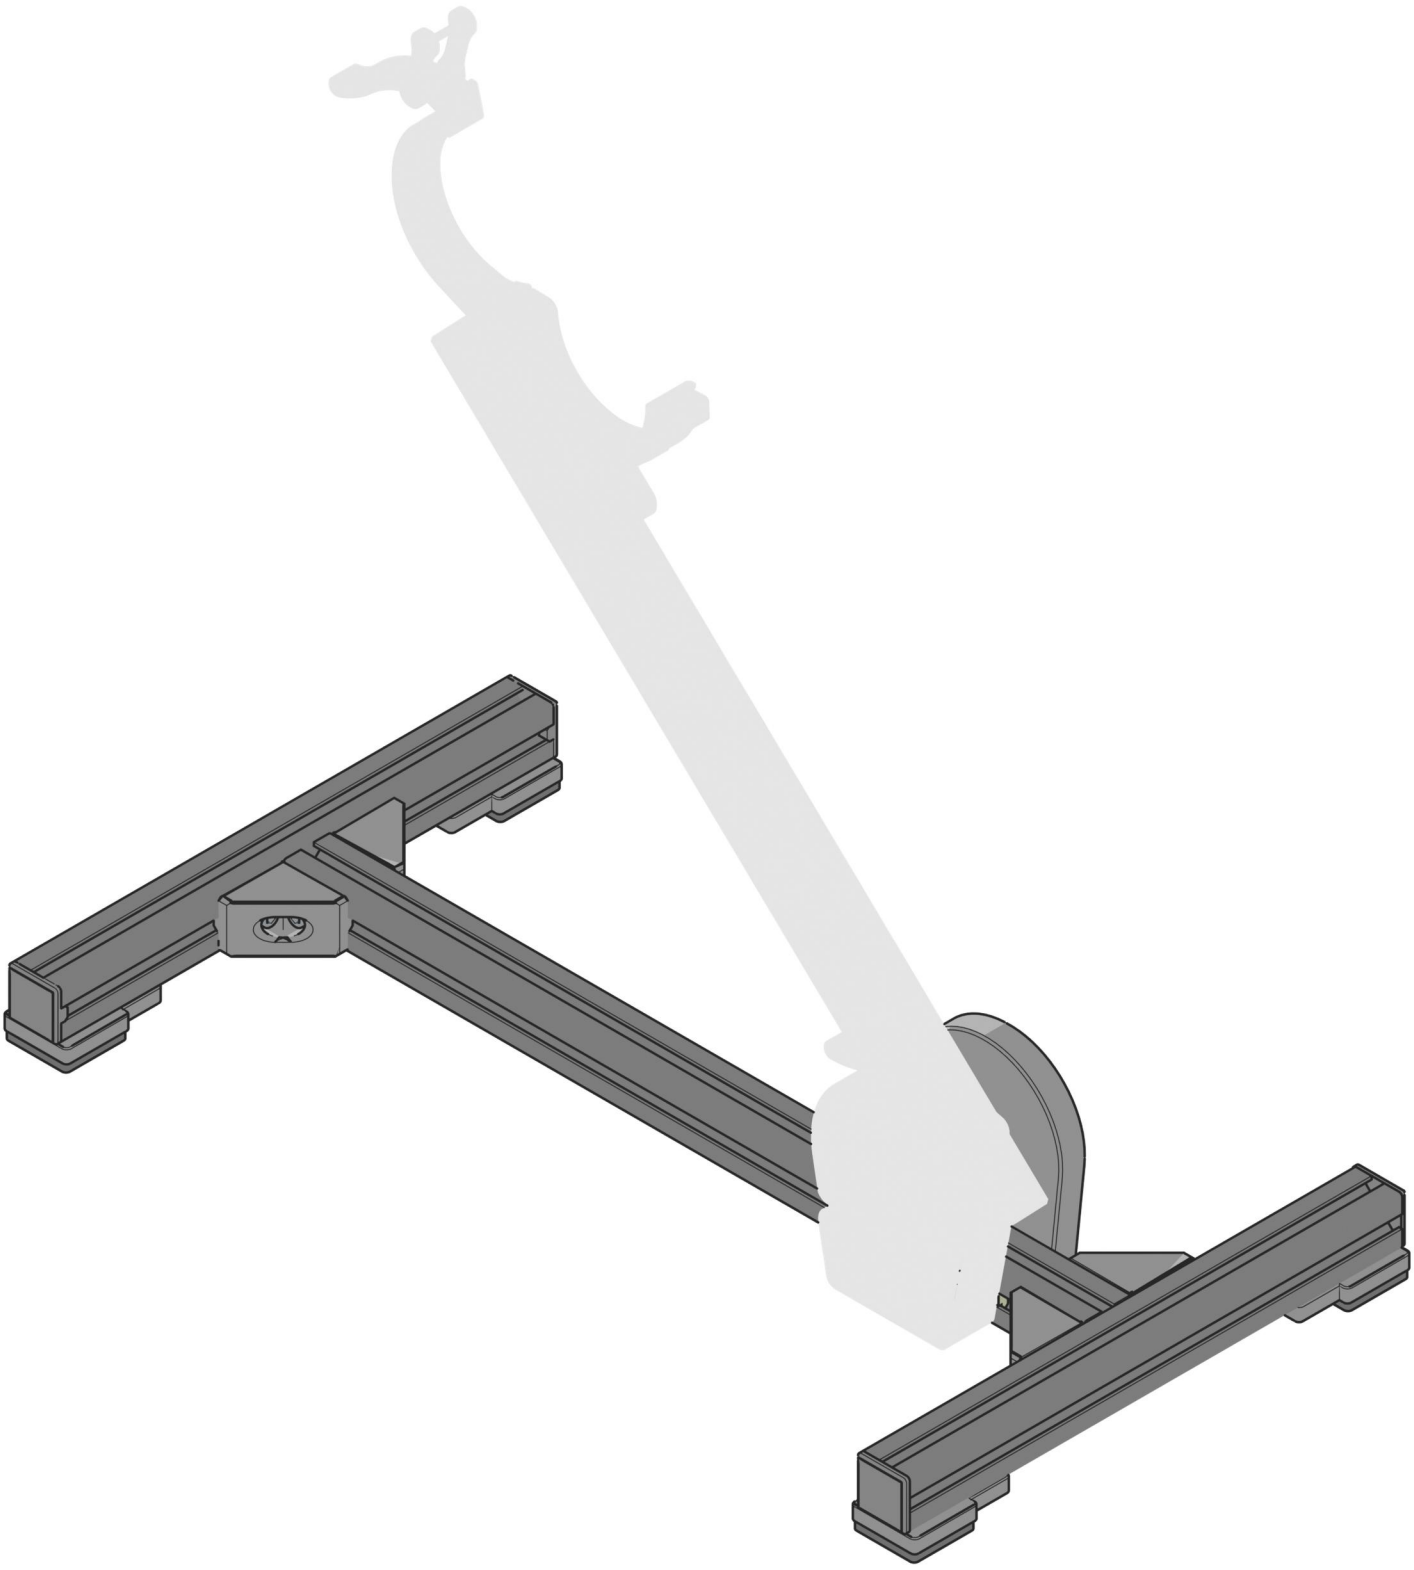


1







2×
Leg


4×
M6 T-nut

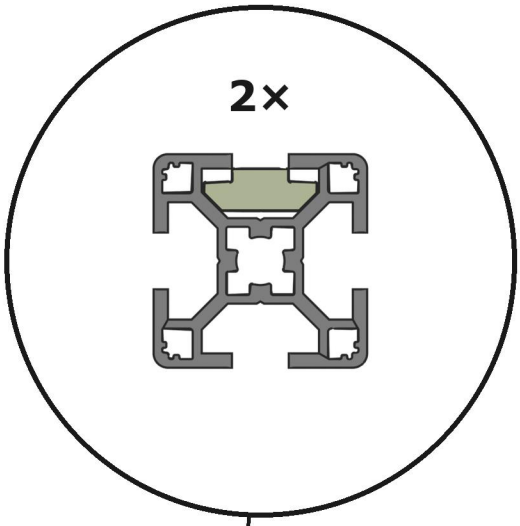


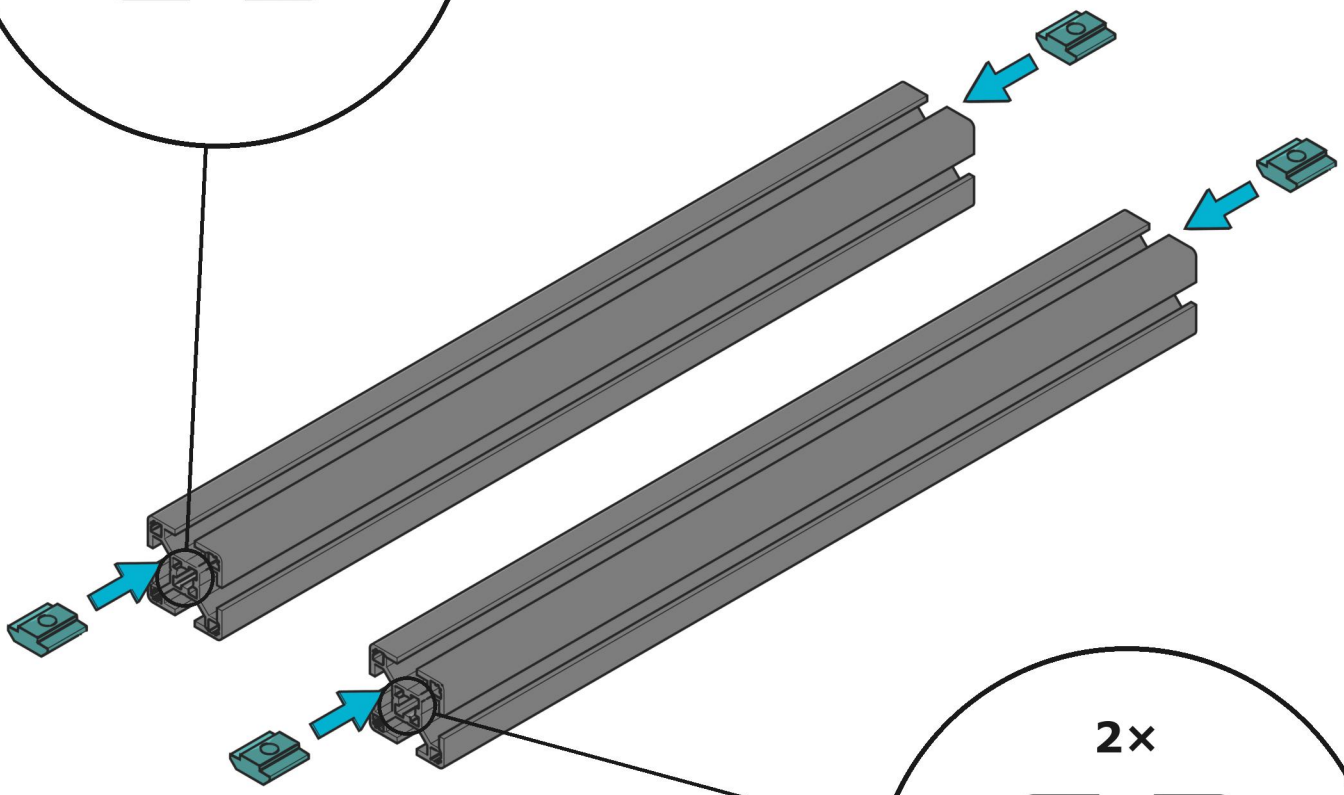

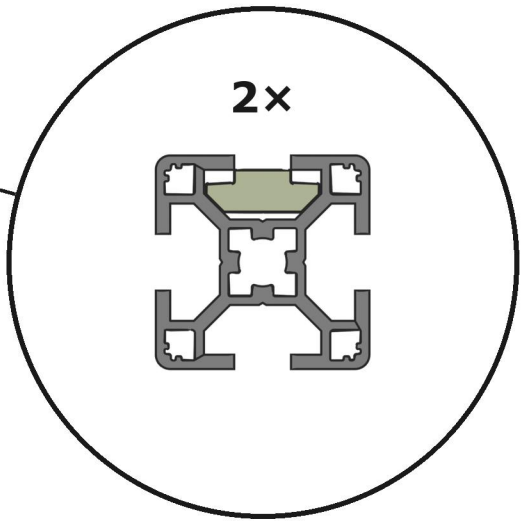


2

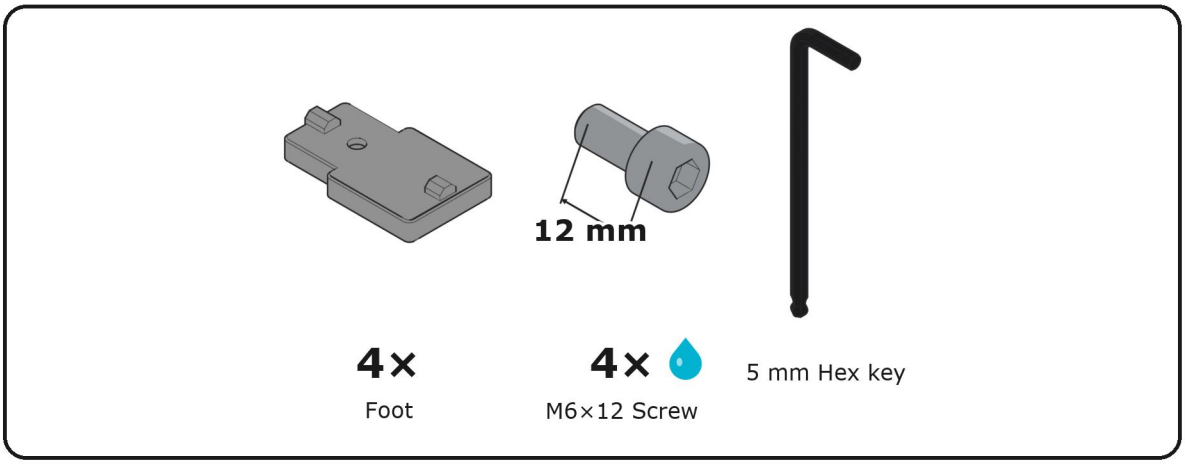

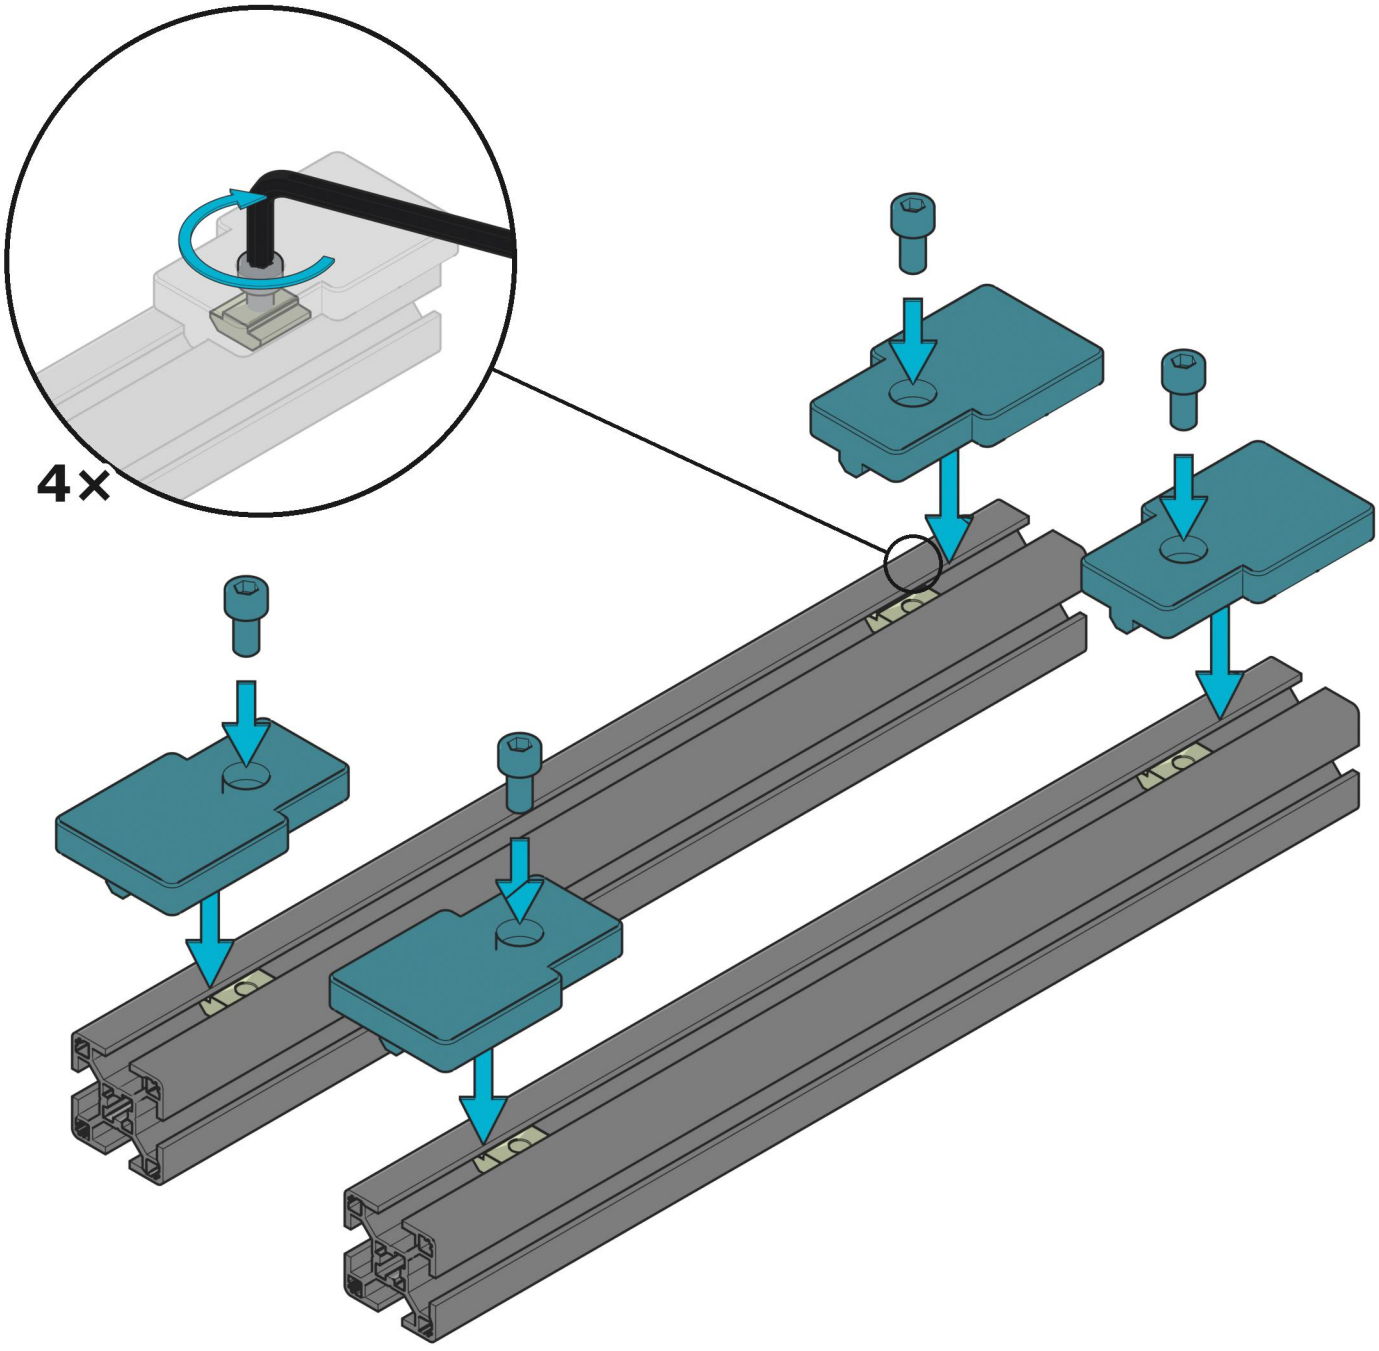


3




4× Grip pad


Super glue

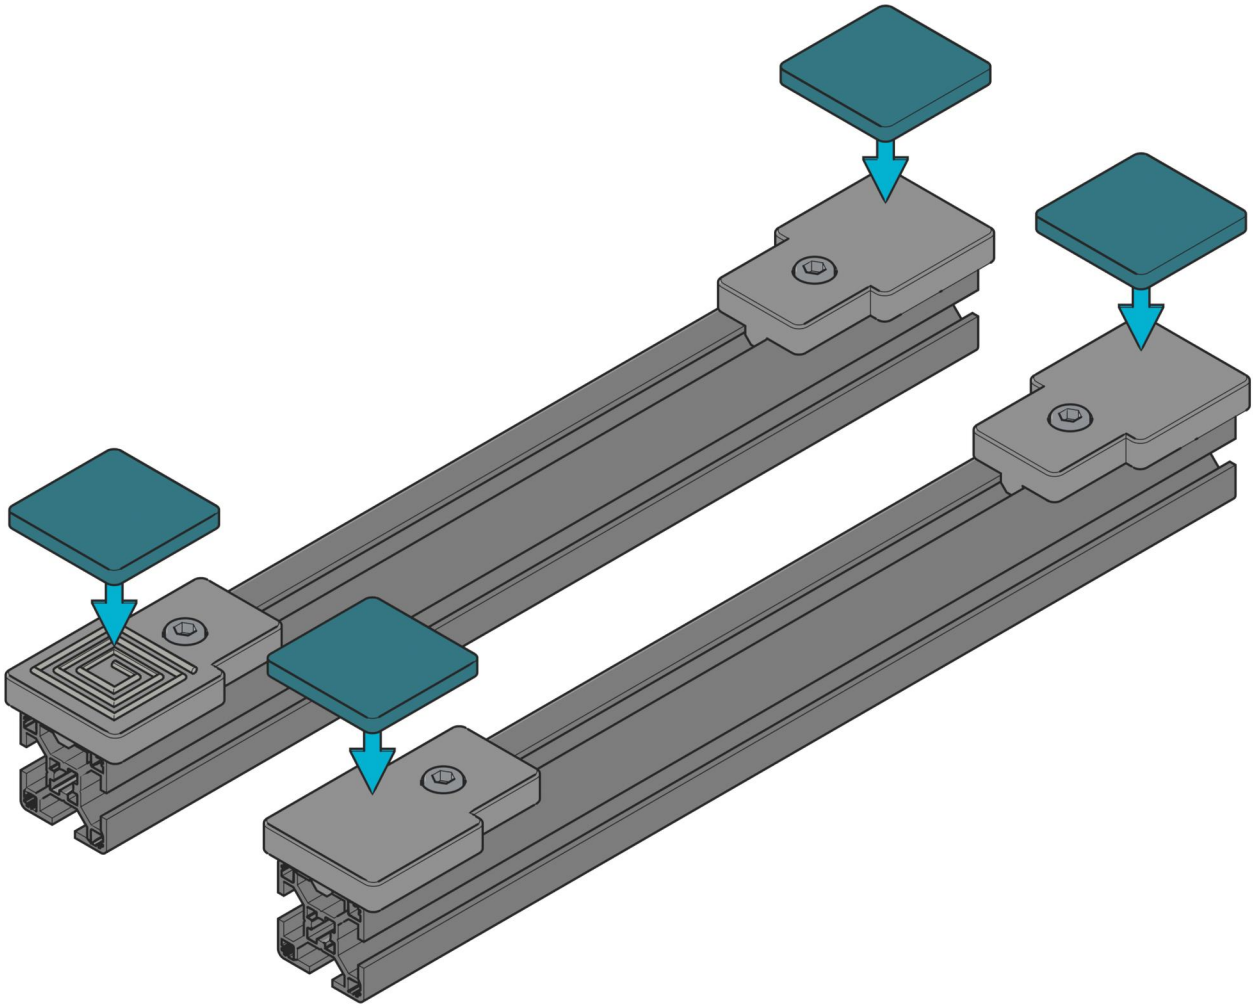

Optional: super glue under each pad, in this pattern.


4

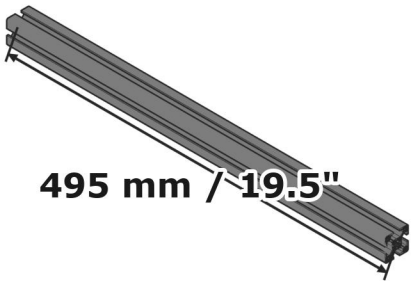





1×
Body

8×
M6 T-nut

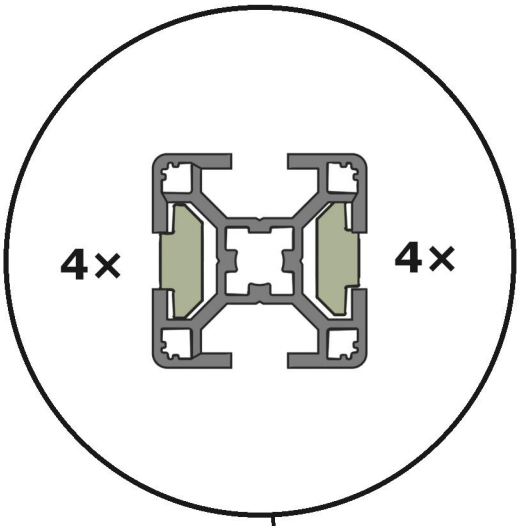

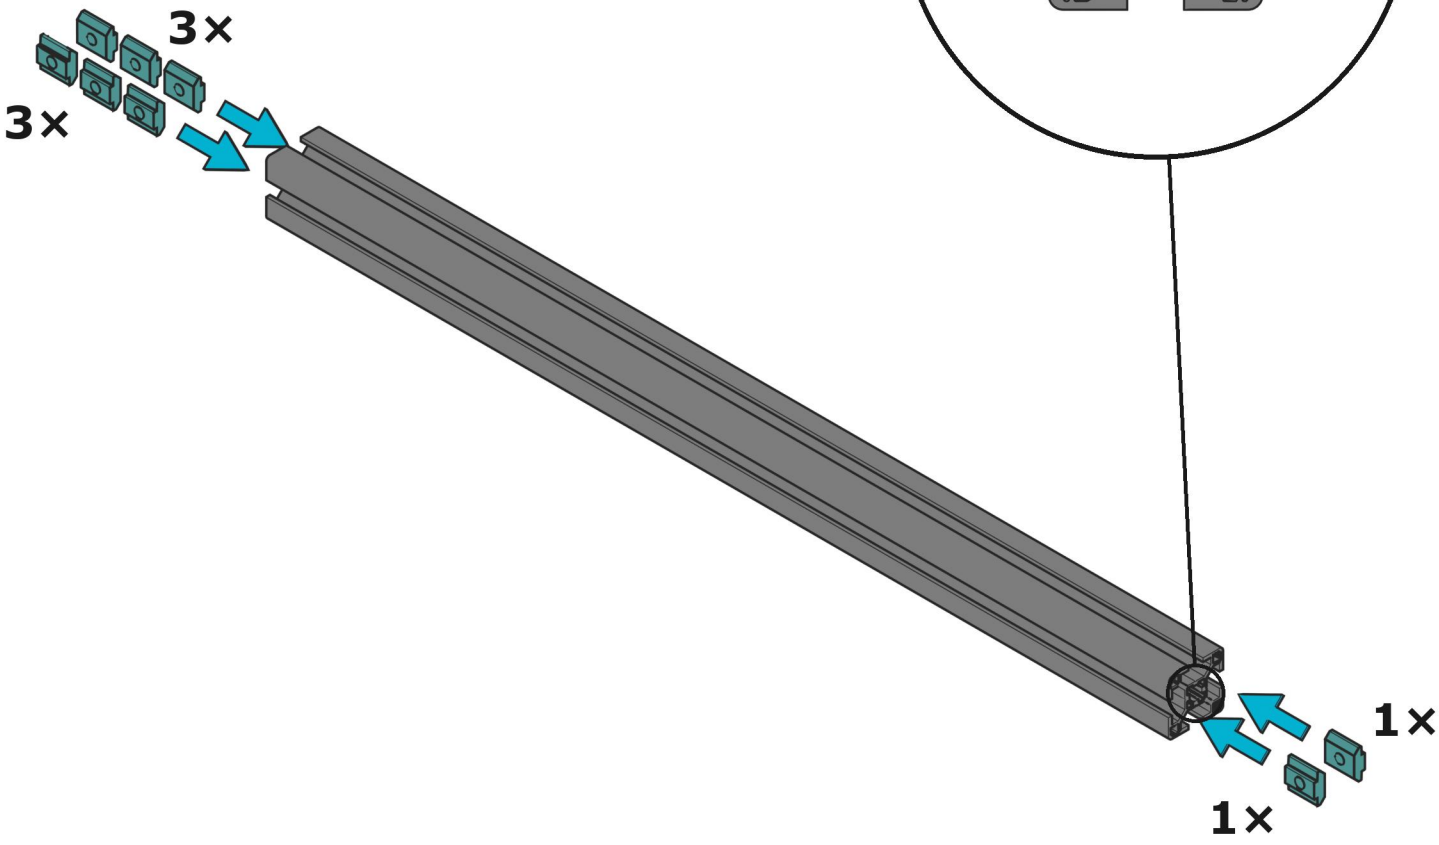


5

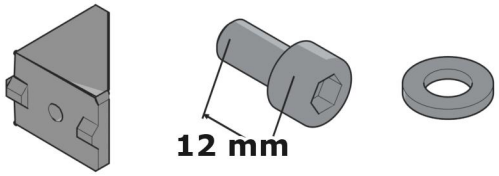


4× Corner bracket

4× M6×12 Screw

4× M6 Washer

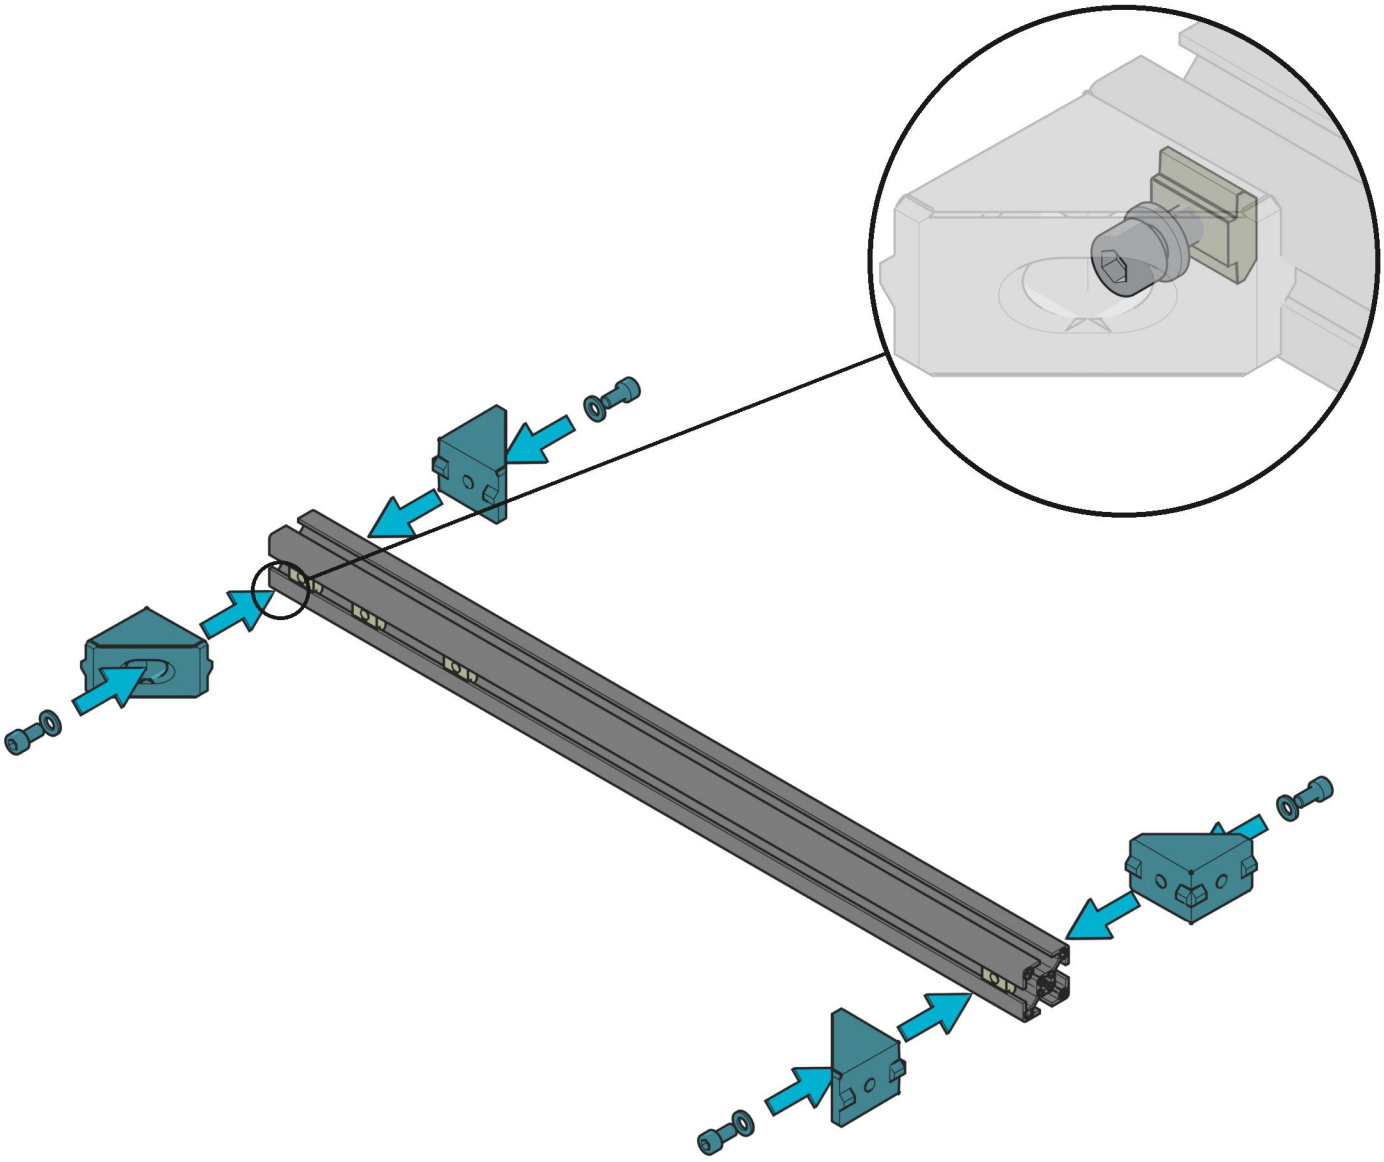


6




4×

M6 T-nut

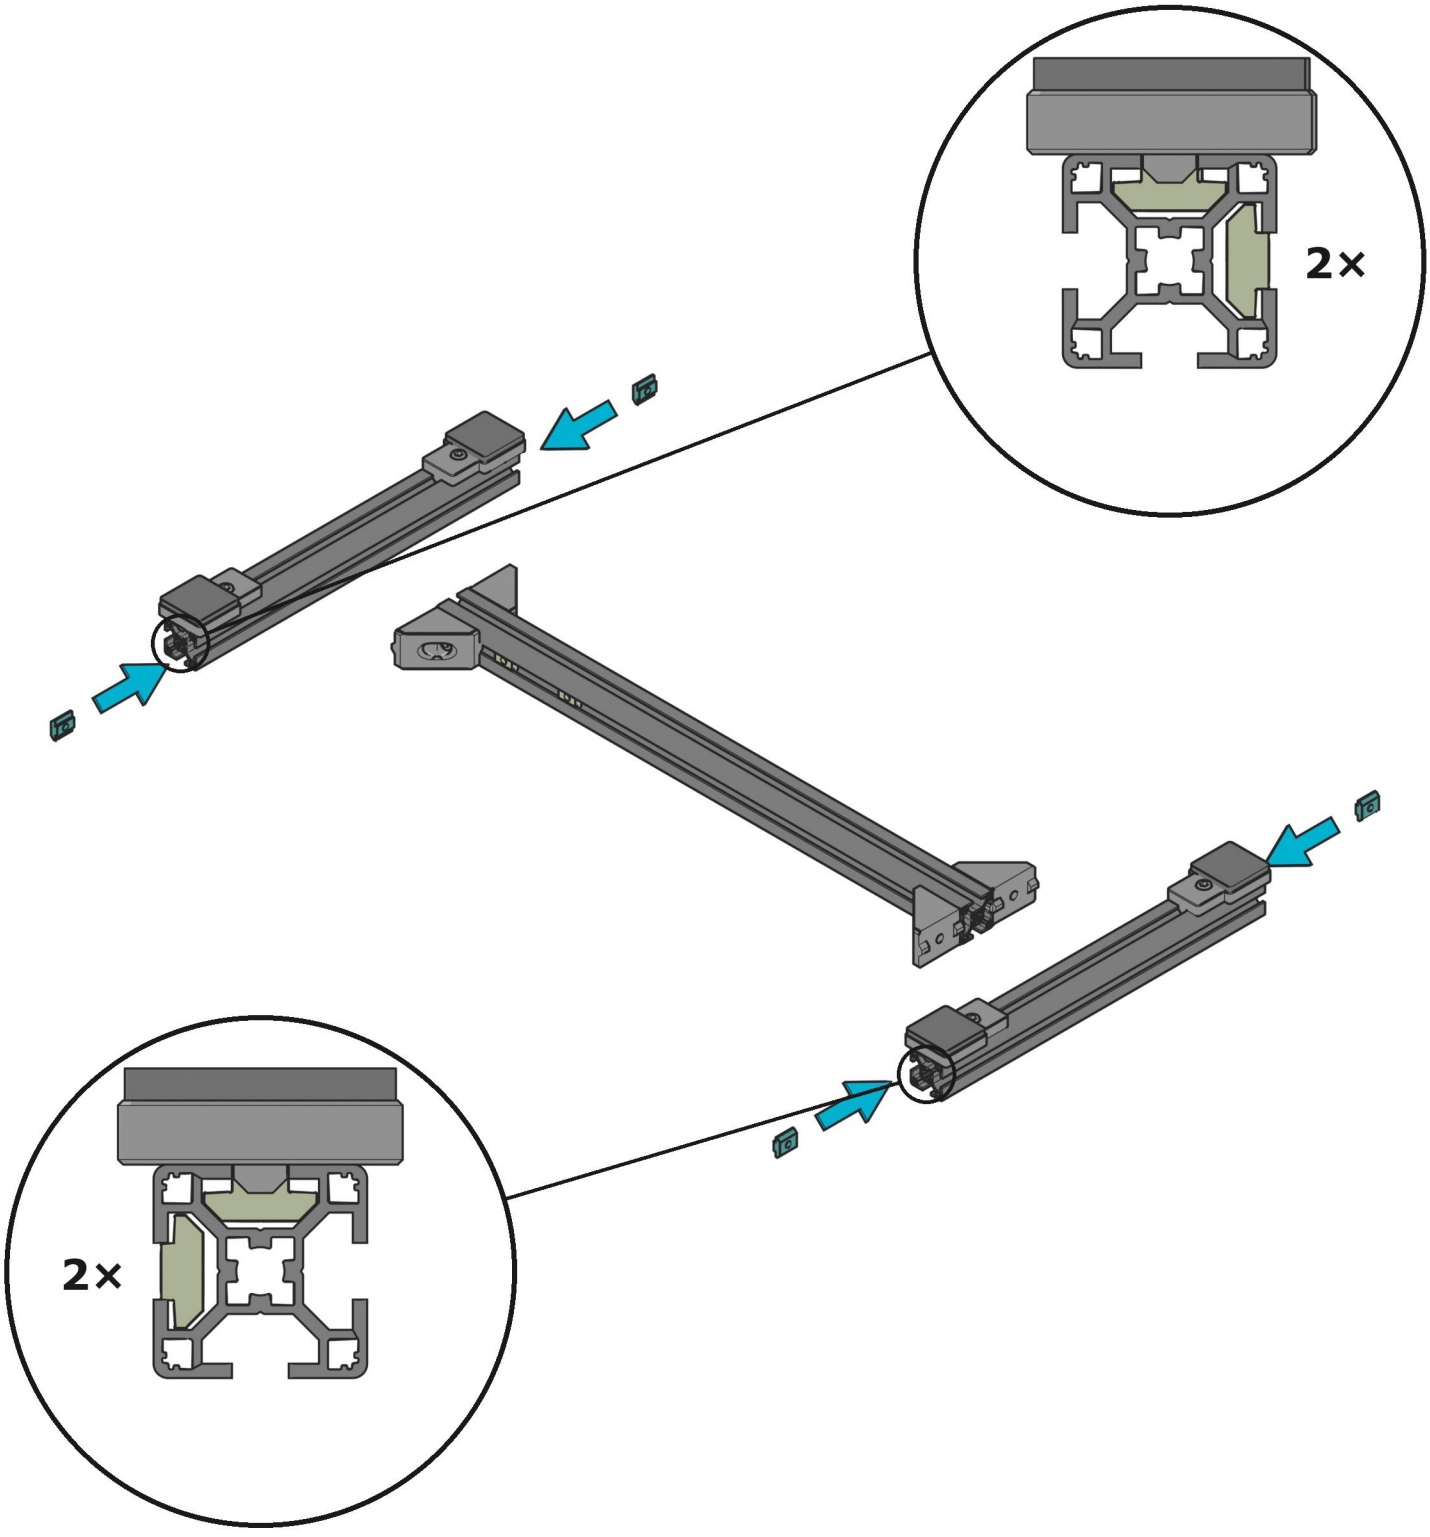



7



4× M6×12 Screw

4× M6 Washer

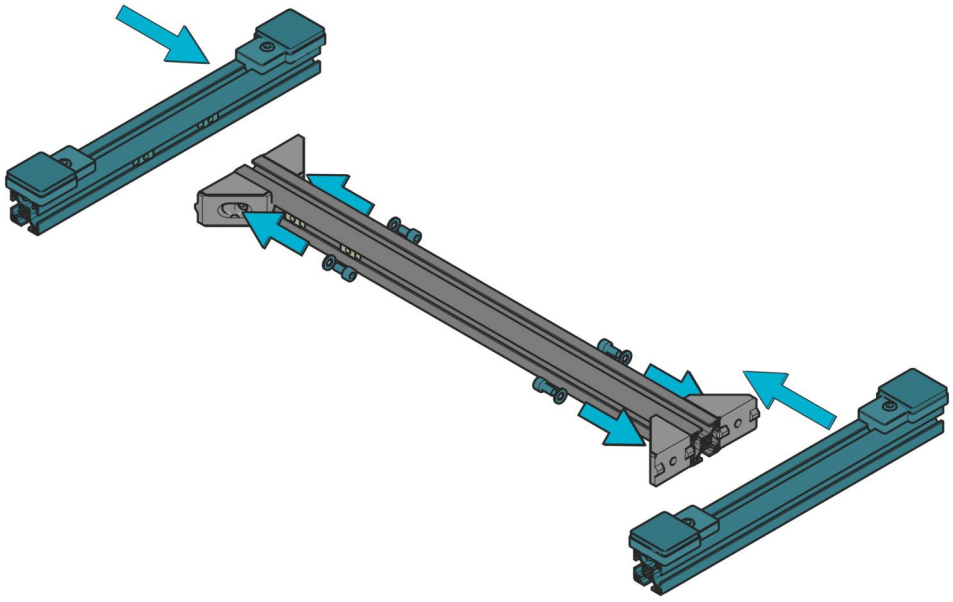

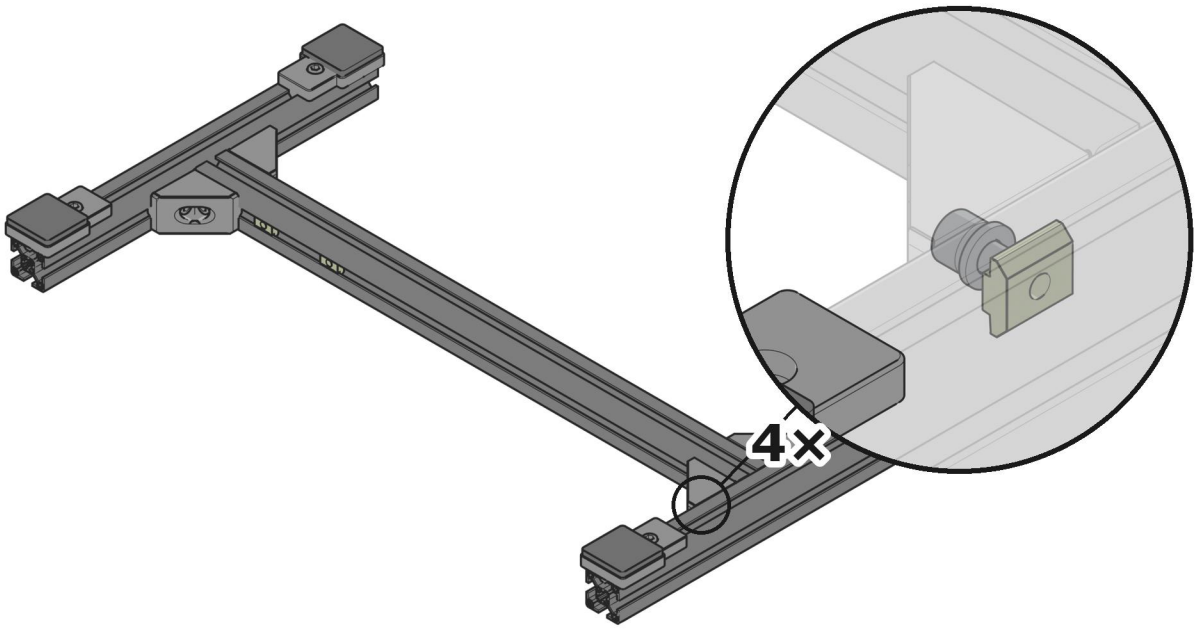


Leave these screws loose until the next step.


8




5 mm Hex key



Tape measure

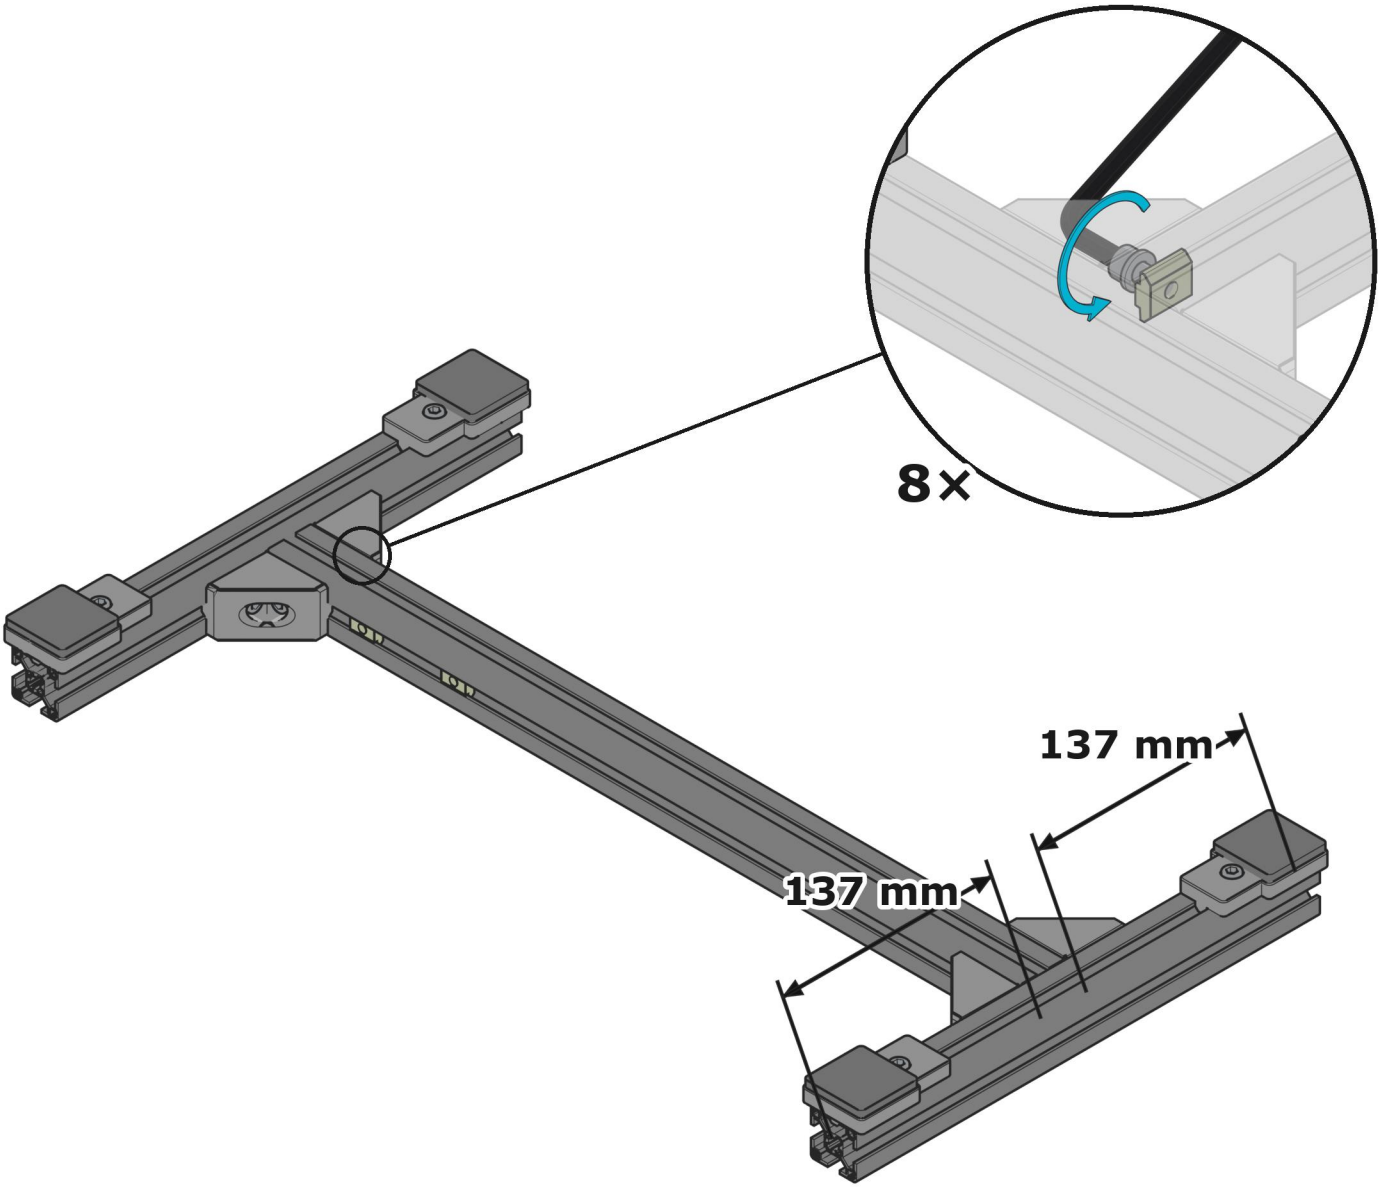



9




4×
End cap

Rubber mallet

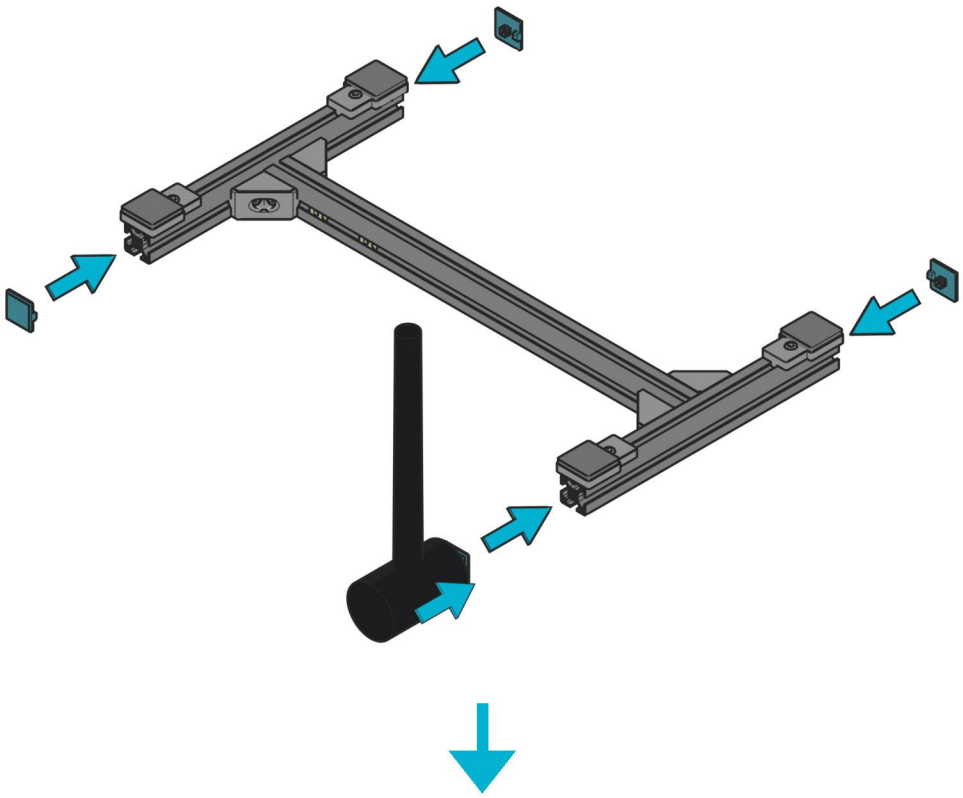


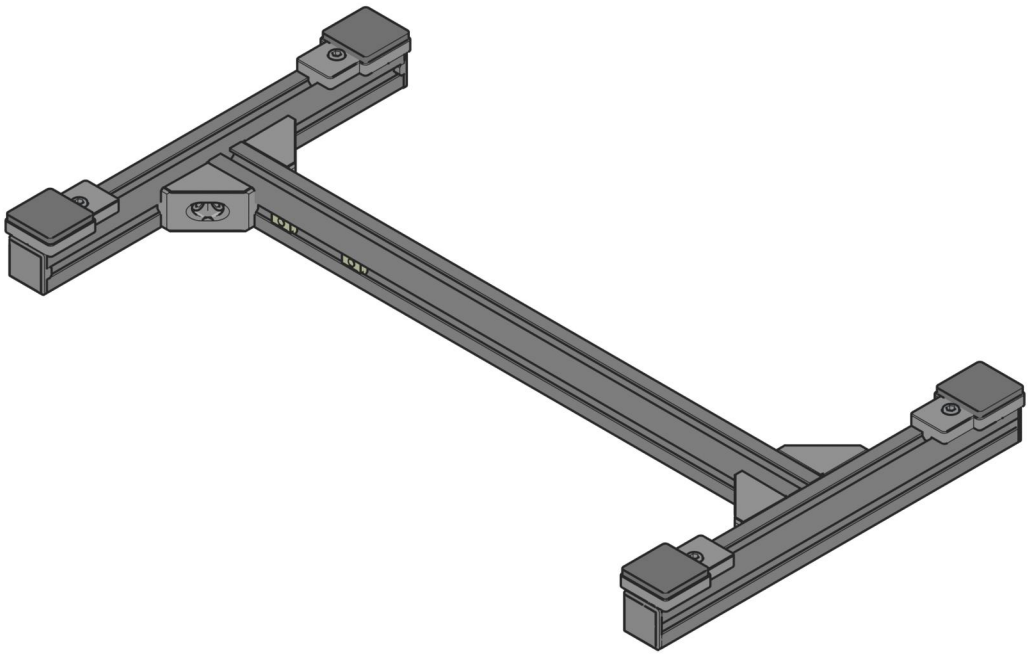

10

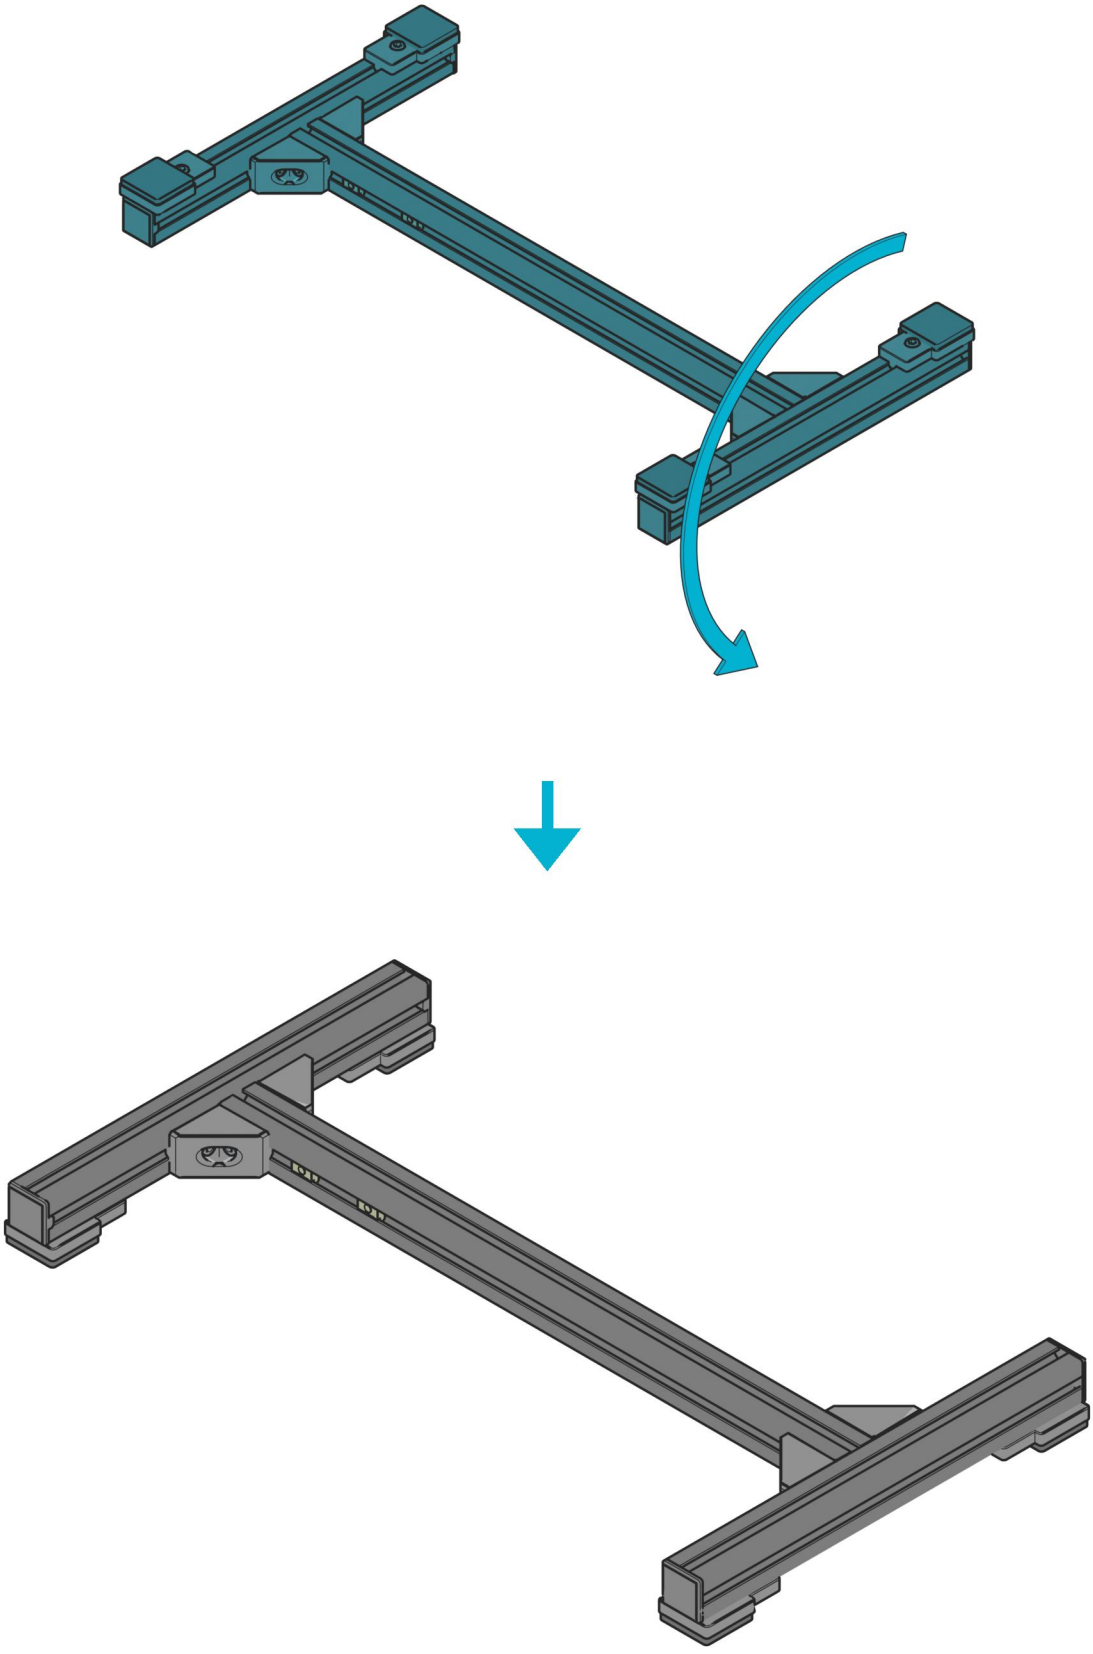

11

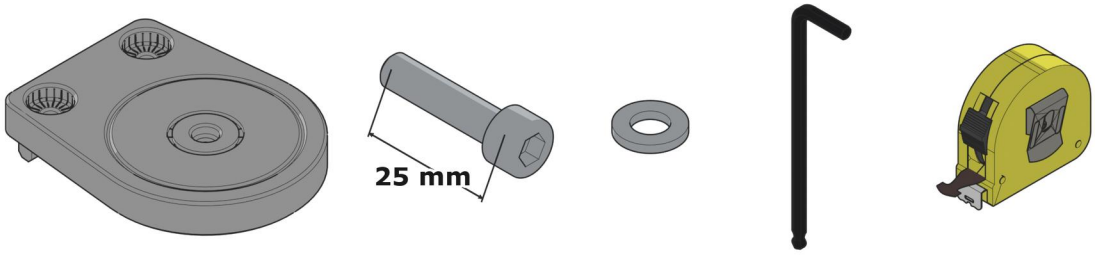


1× Pivot plate


2× M6×25 Screw

2× M6 Washer


5 mm Hex key

Tape measure

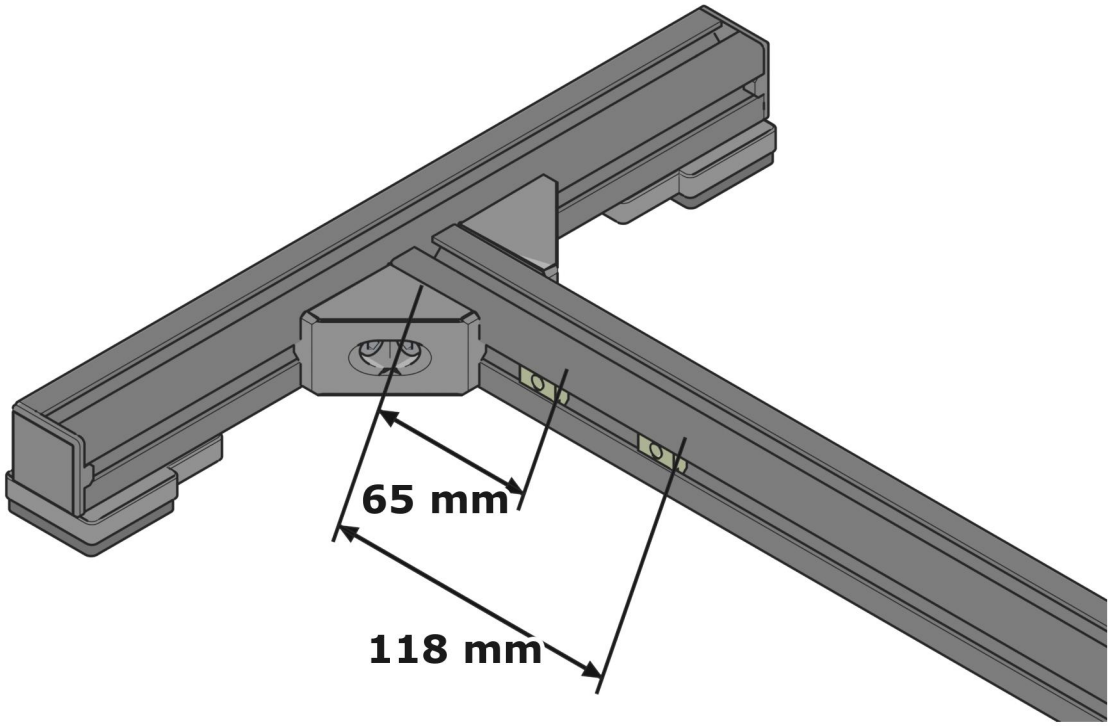


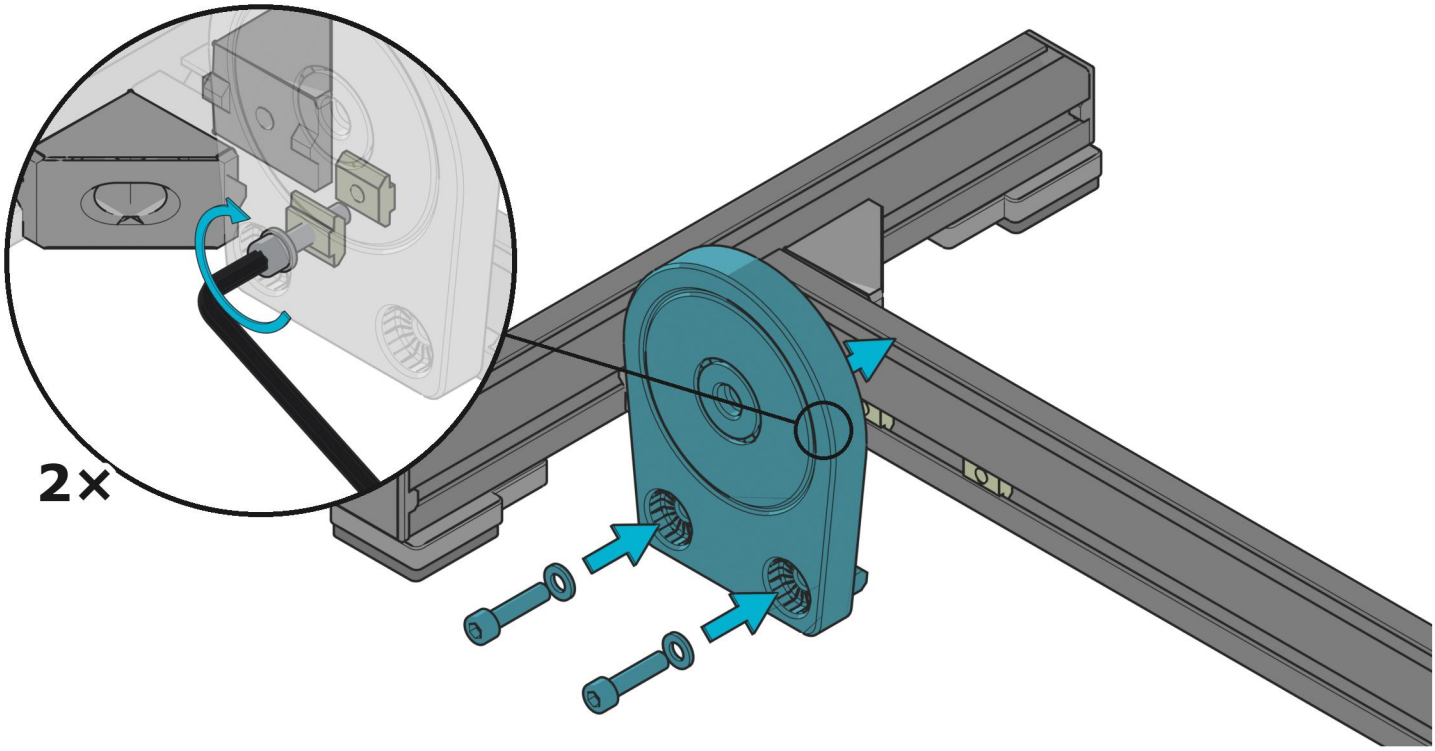

2 The arm and its clamp

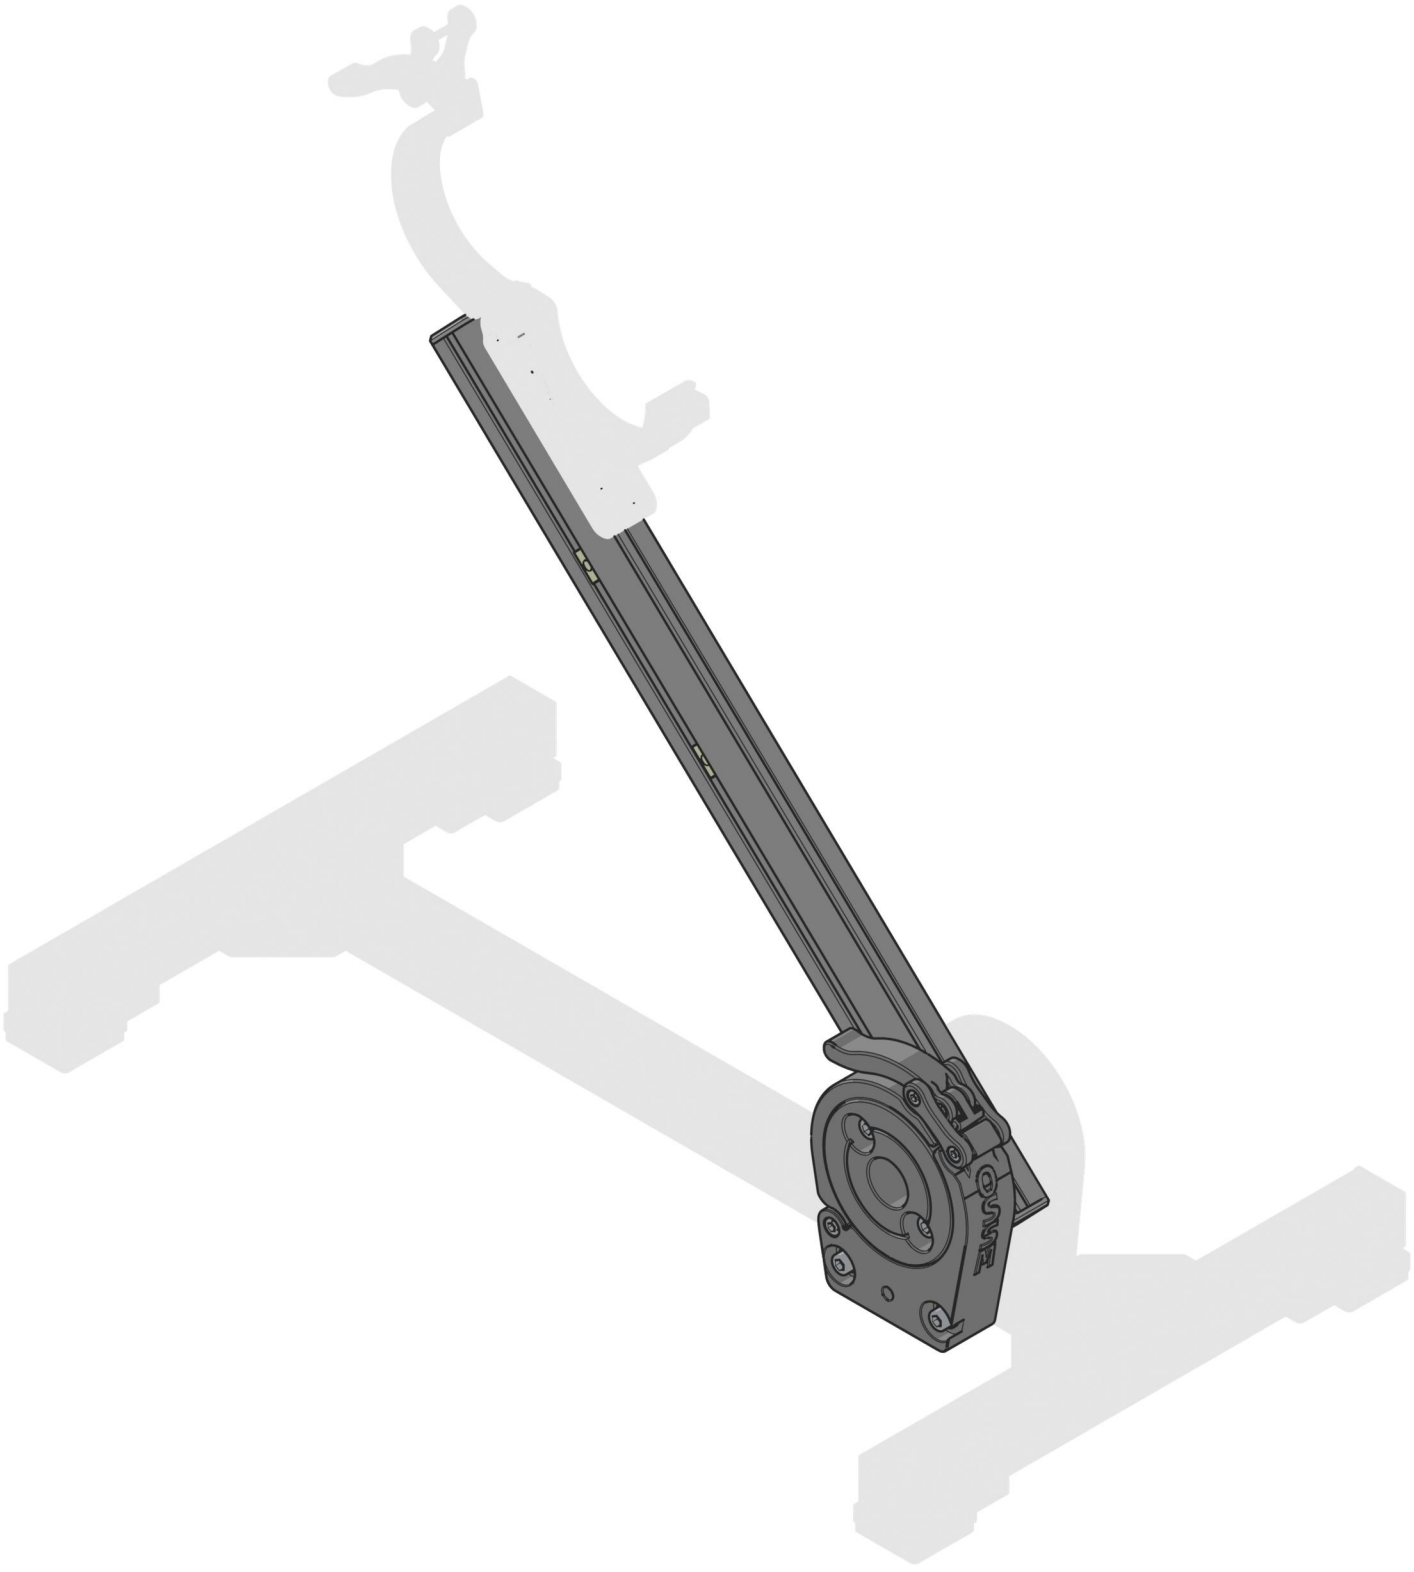


12

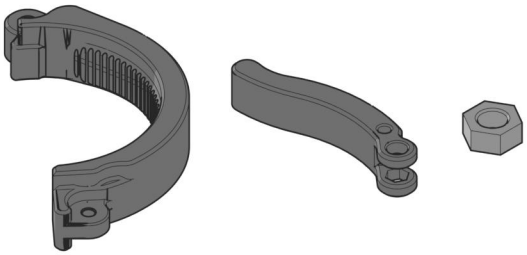

1× Clasp

1× Handle

1× M4 Nut

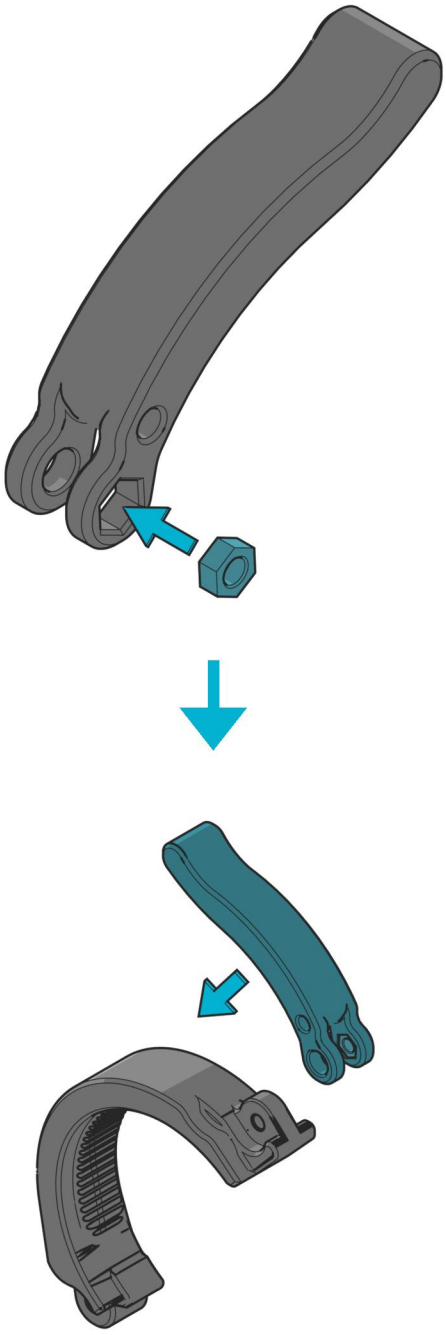


13






1× 3 mm Hex key

M4×12 Screw

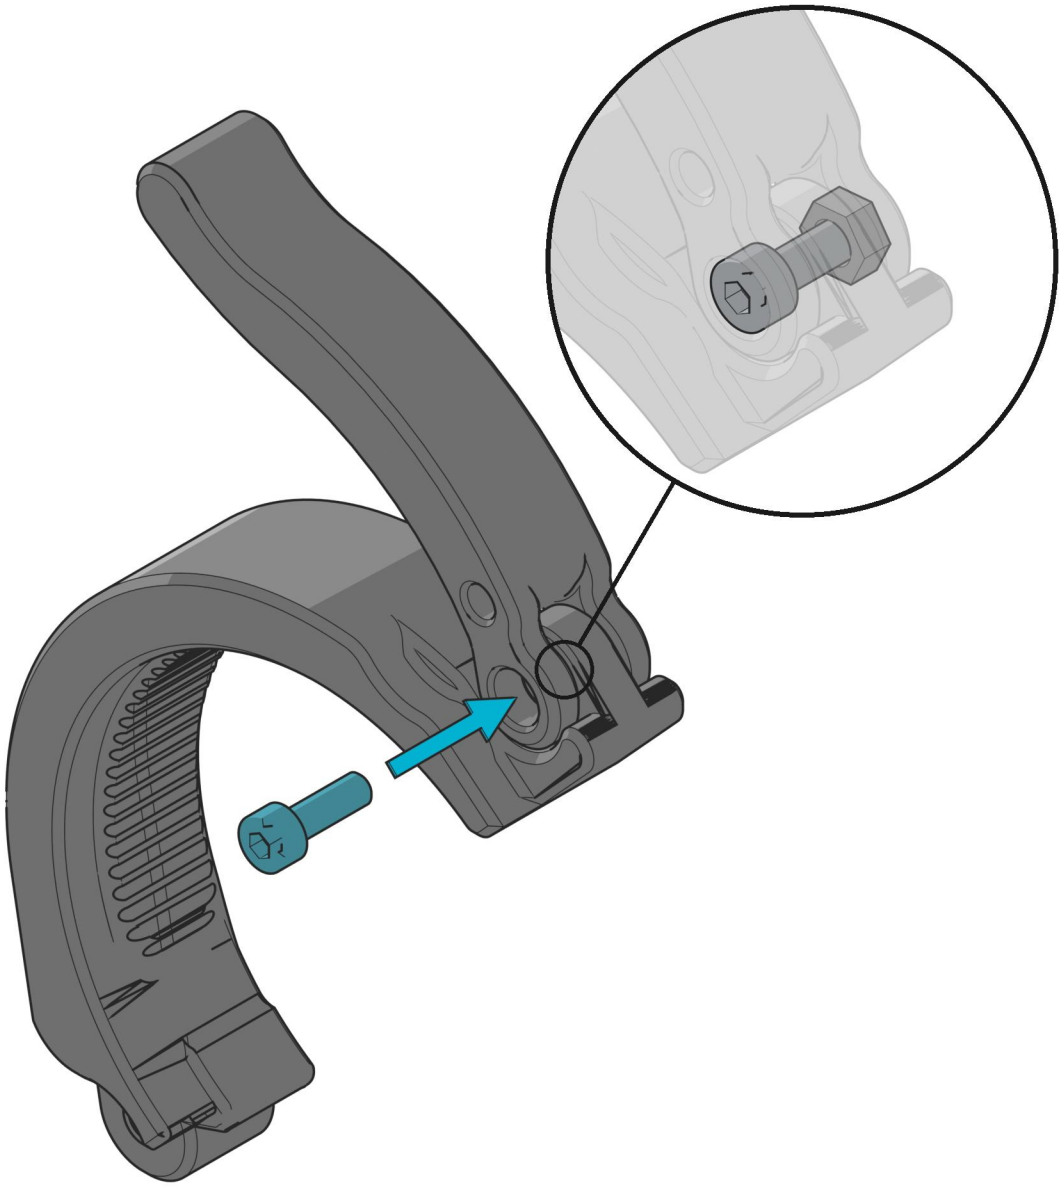


14




1× Link (nut side)


2× M4 Nut

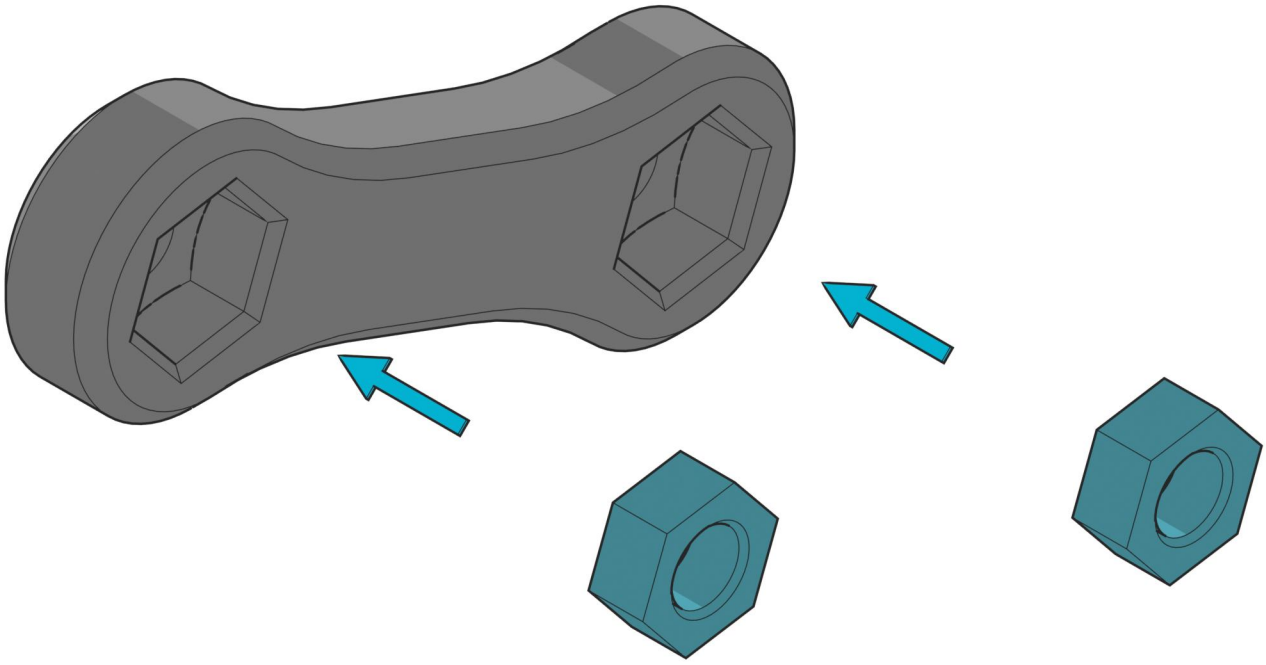

15




1×
Link (bolt side)




1×
M4×25 Screw



3 mm Hex key

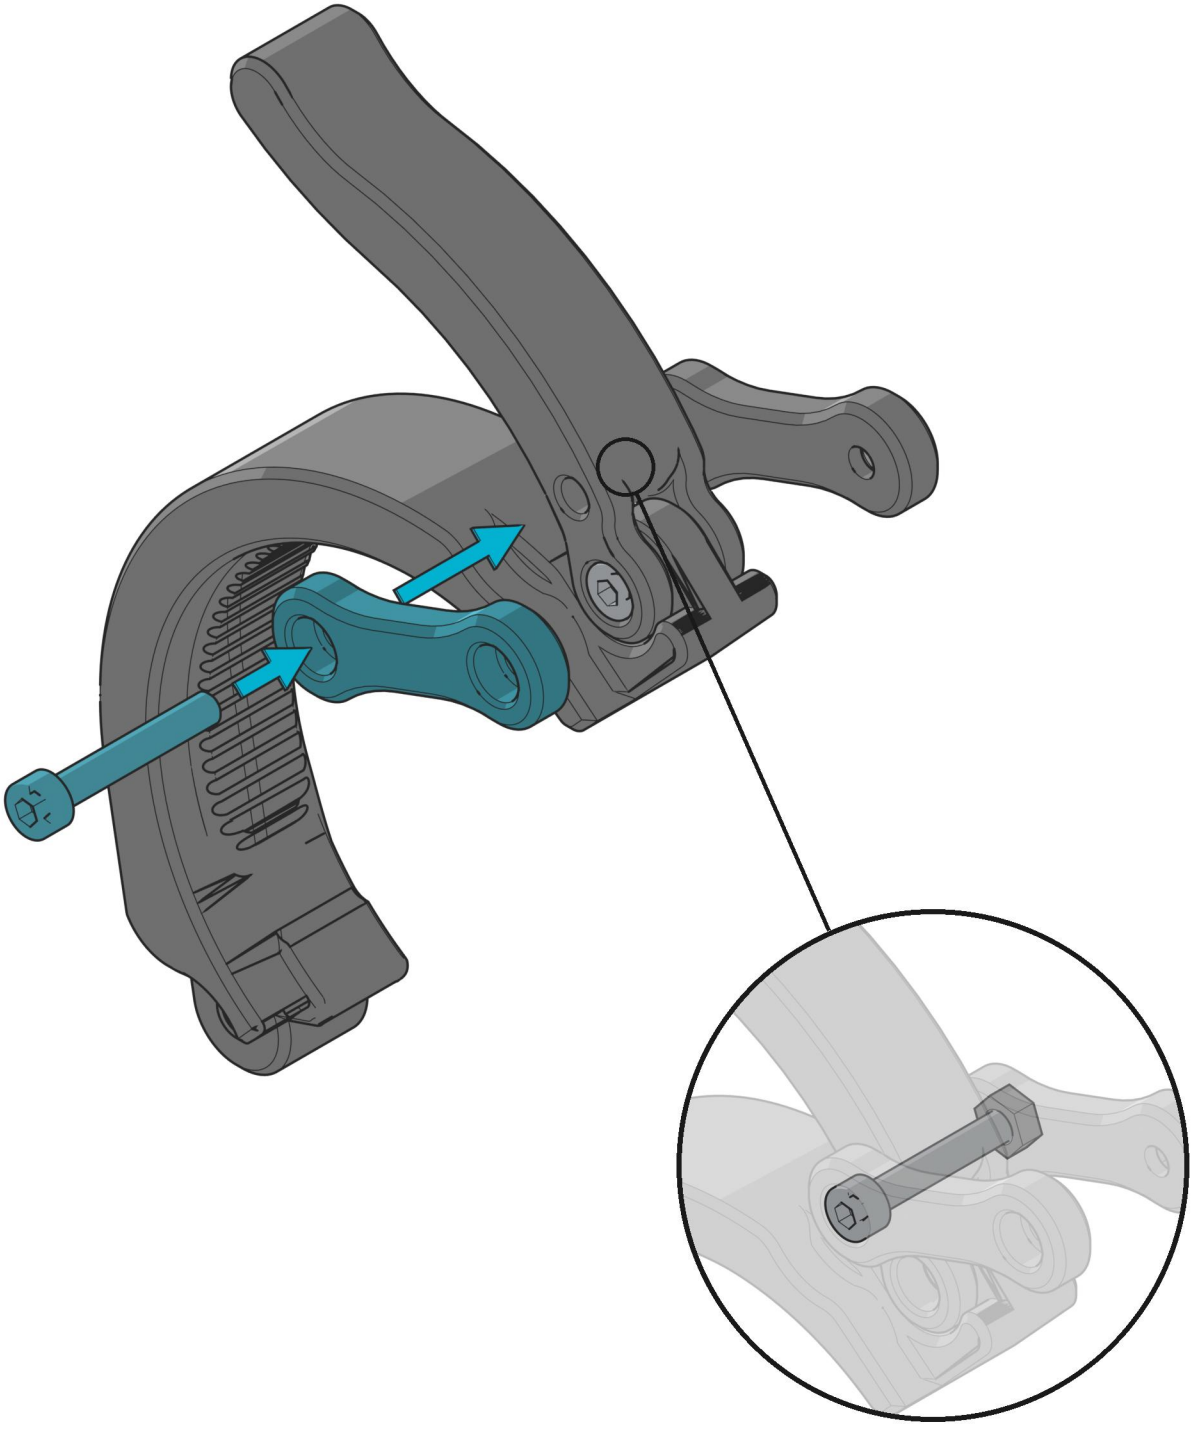


16






1×
M4×25 Screw


3 mm Hex key

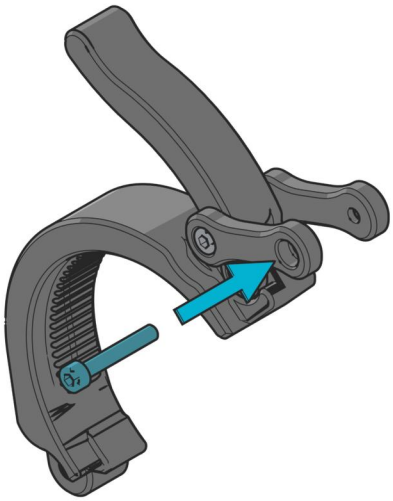



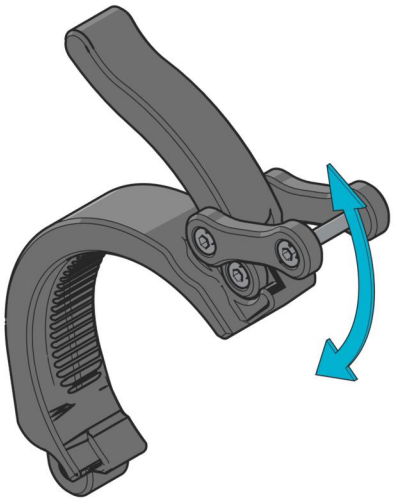


17

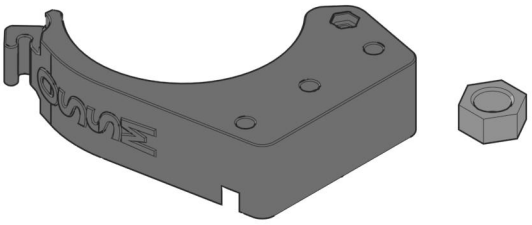


1×
Lower clamp base

1×
M5 Nut

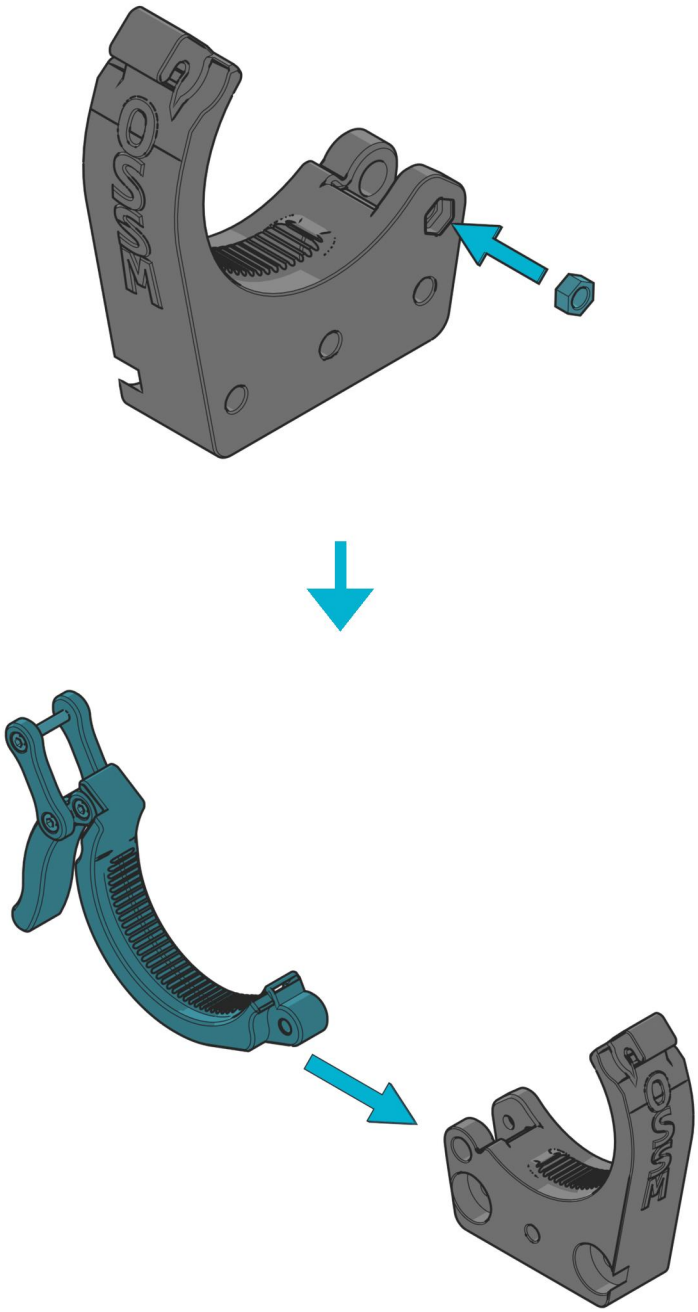


18




1×
M5×25 Screw




4 mm Hex key

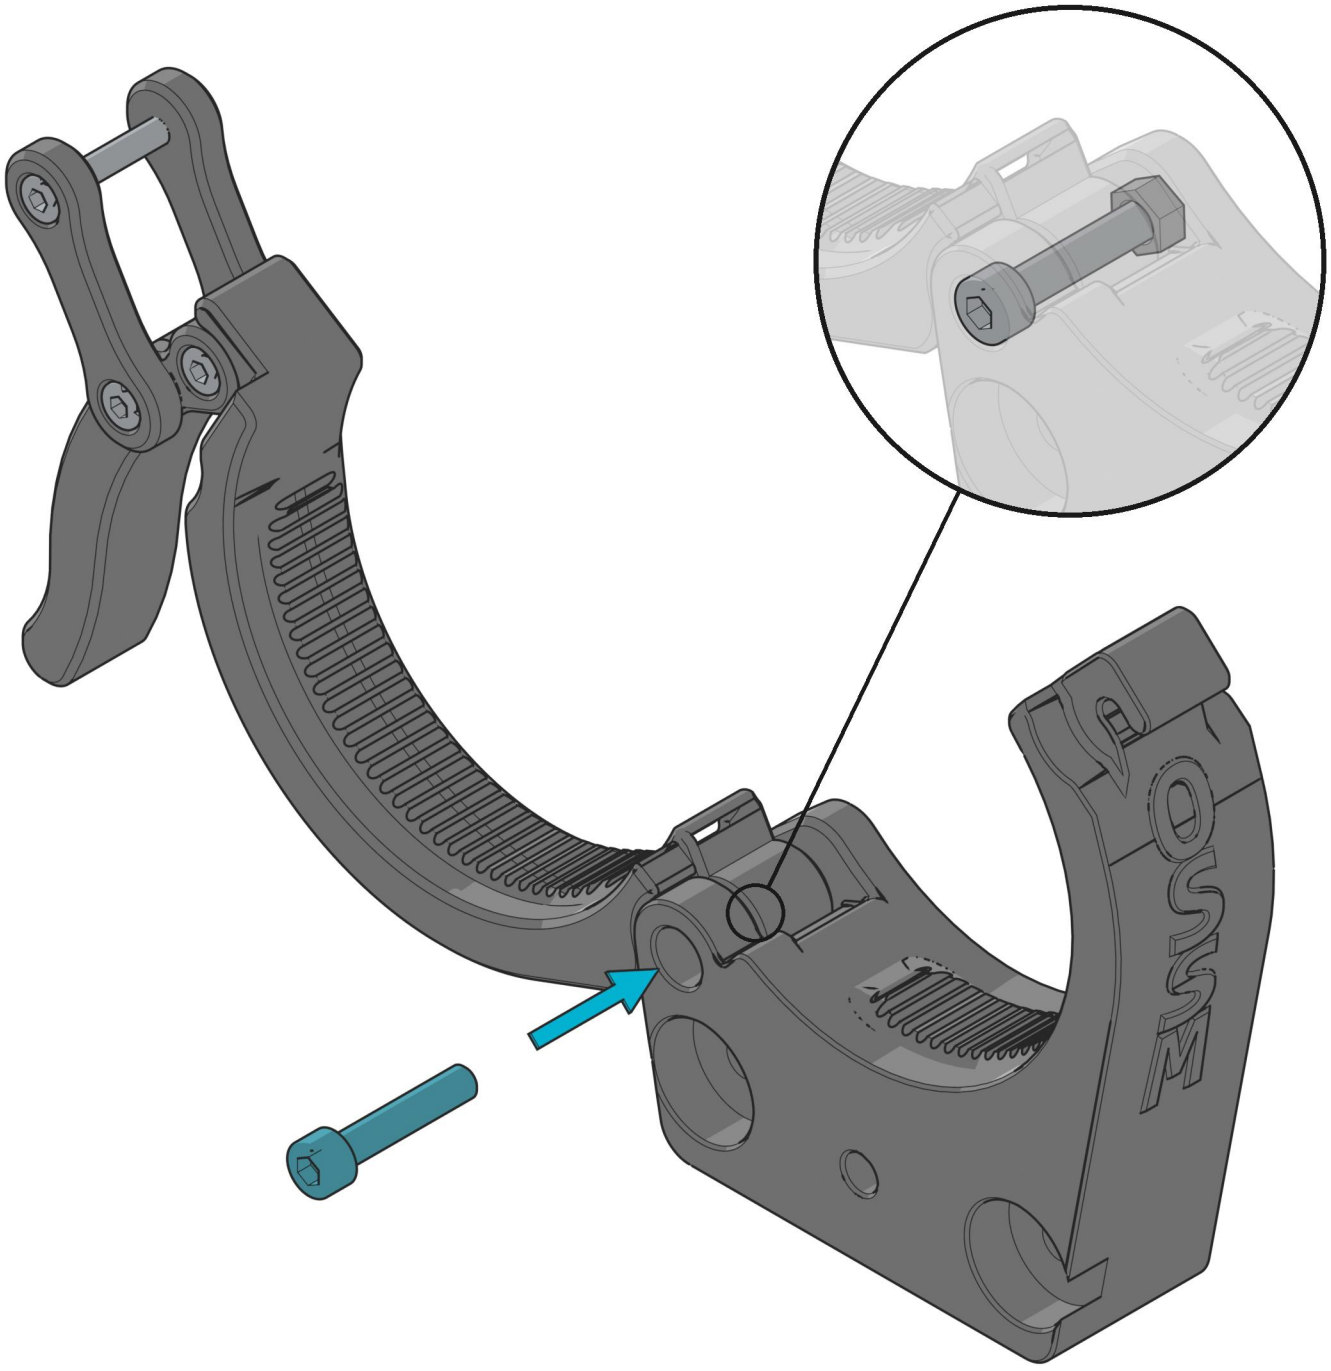



19




Tape measure

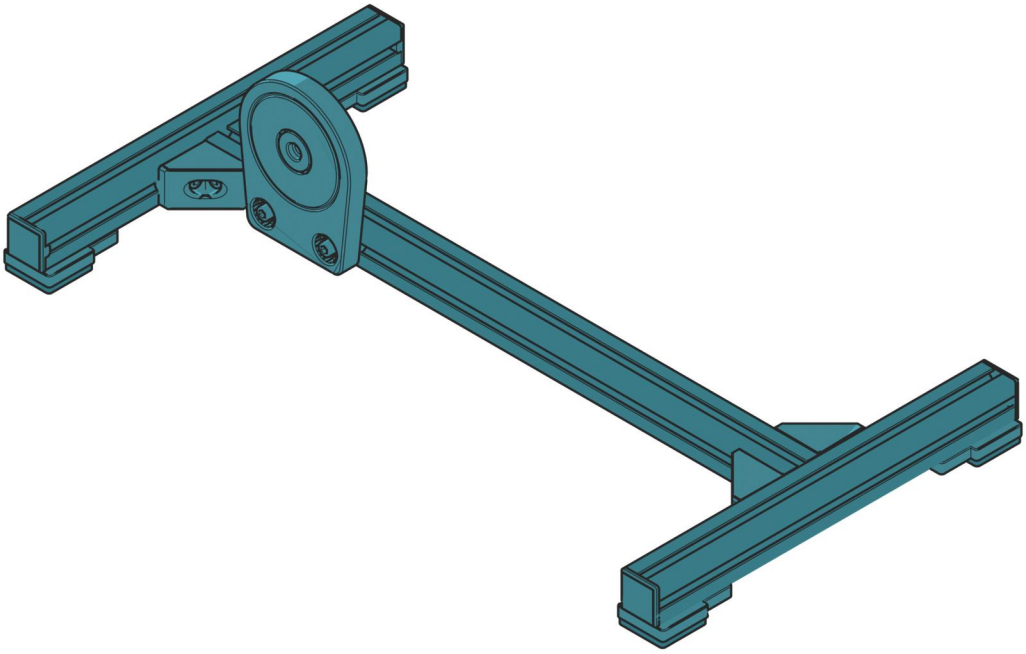



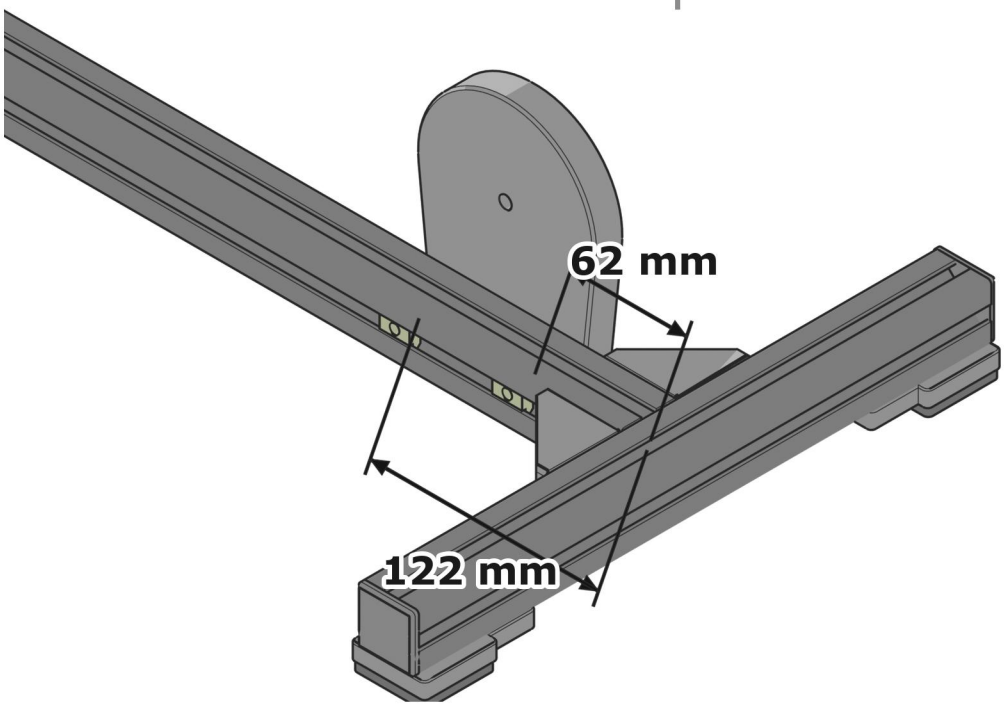


20

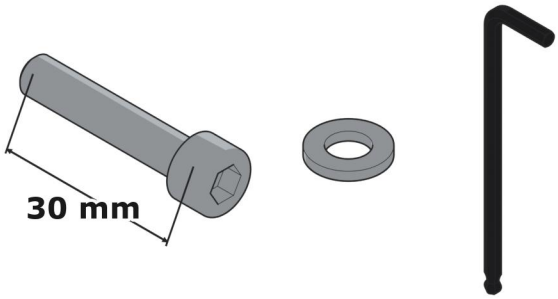


2× M6×30 Screw

2× M6 Washer


5 mm Hex key

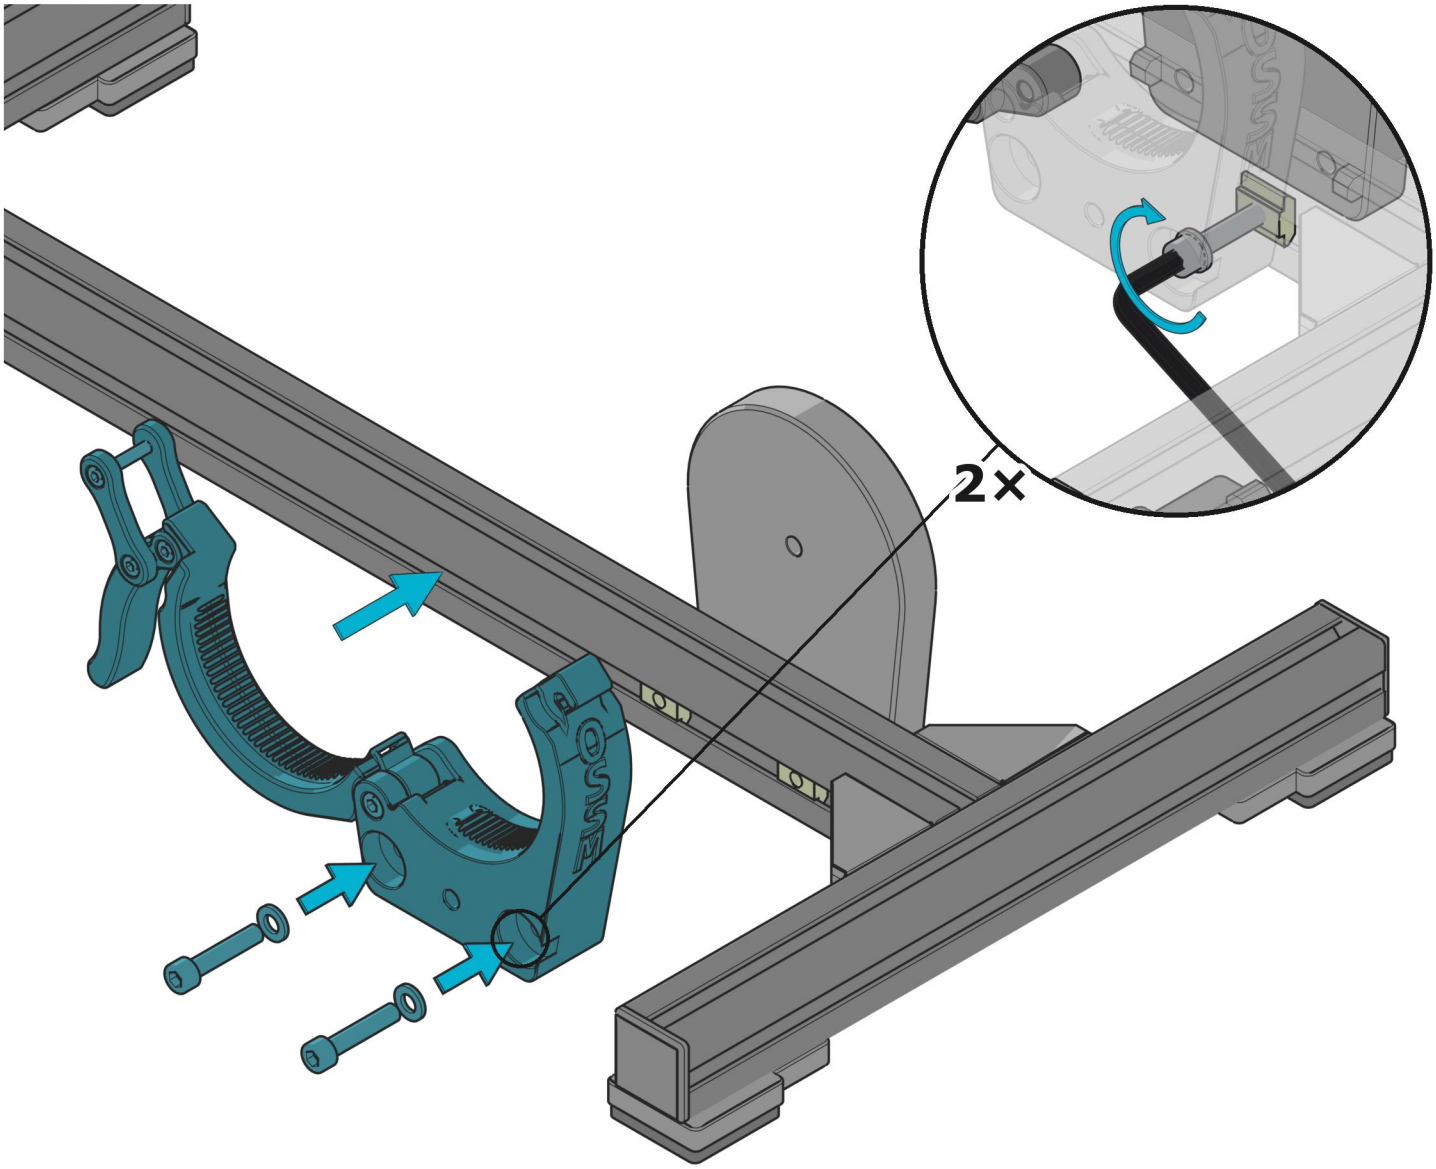


21

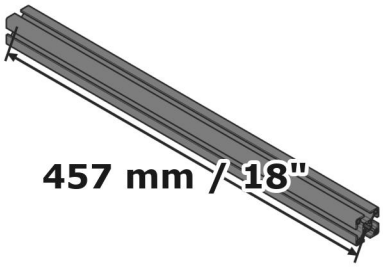


1×
Arm




3×
M6 T-nut



Tape measure

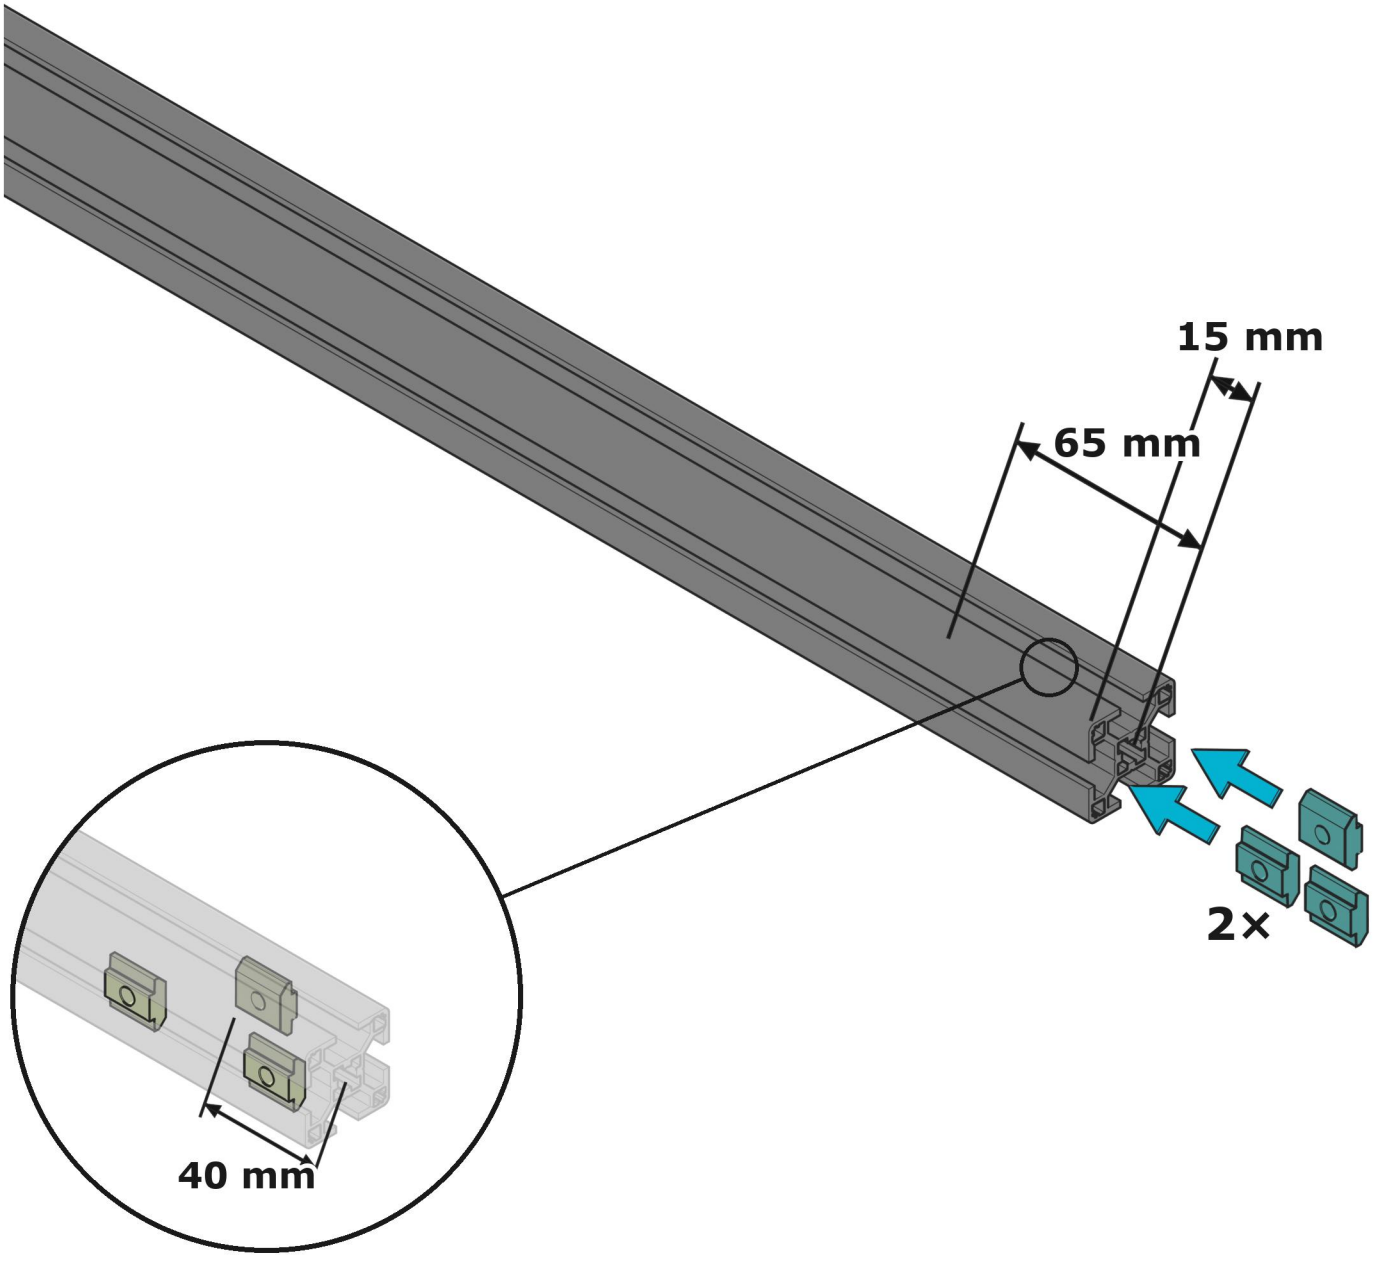


22




1×


End cap

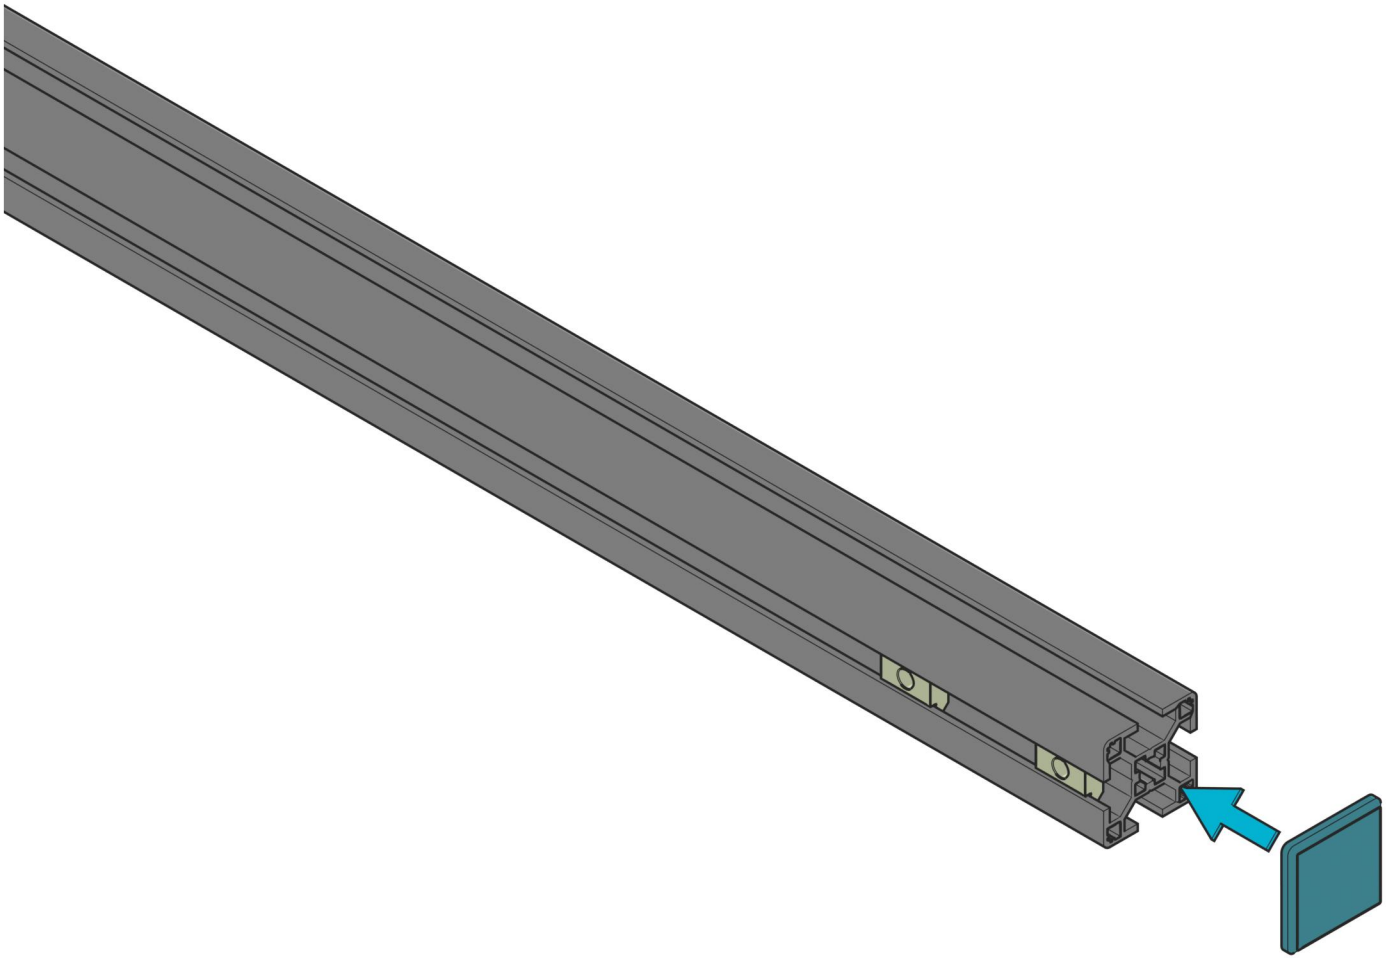

23



1×
Clamp ring




2×
M6×25 Screw




2×
M6 Washer




5 mm Hex key

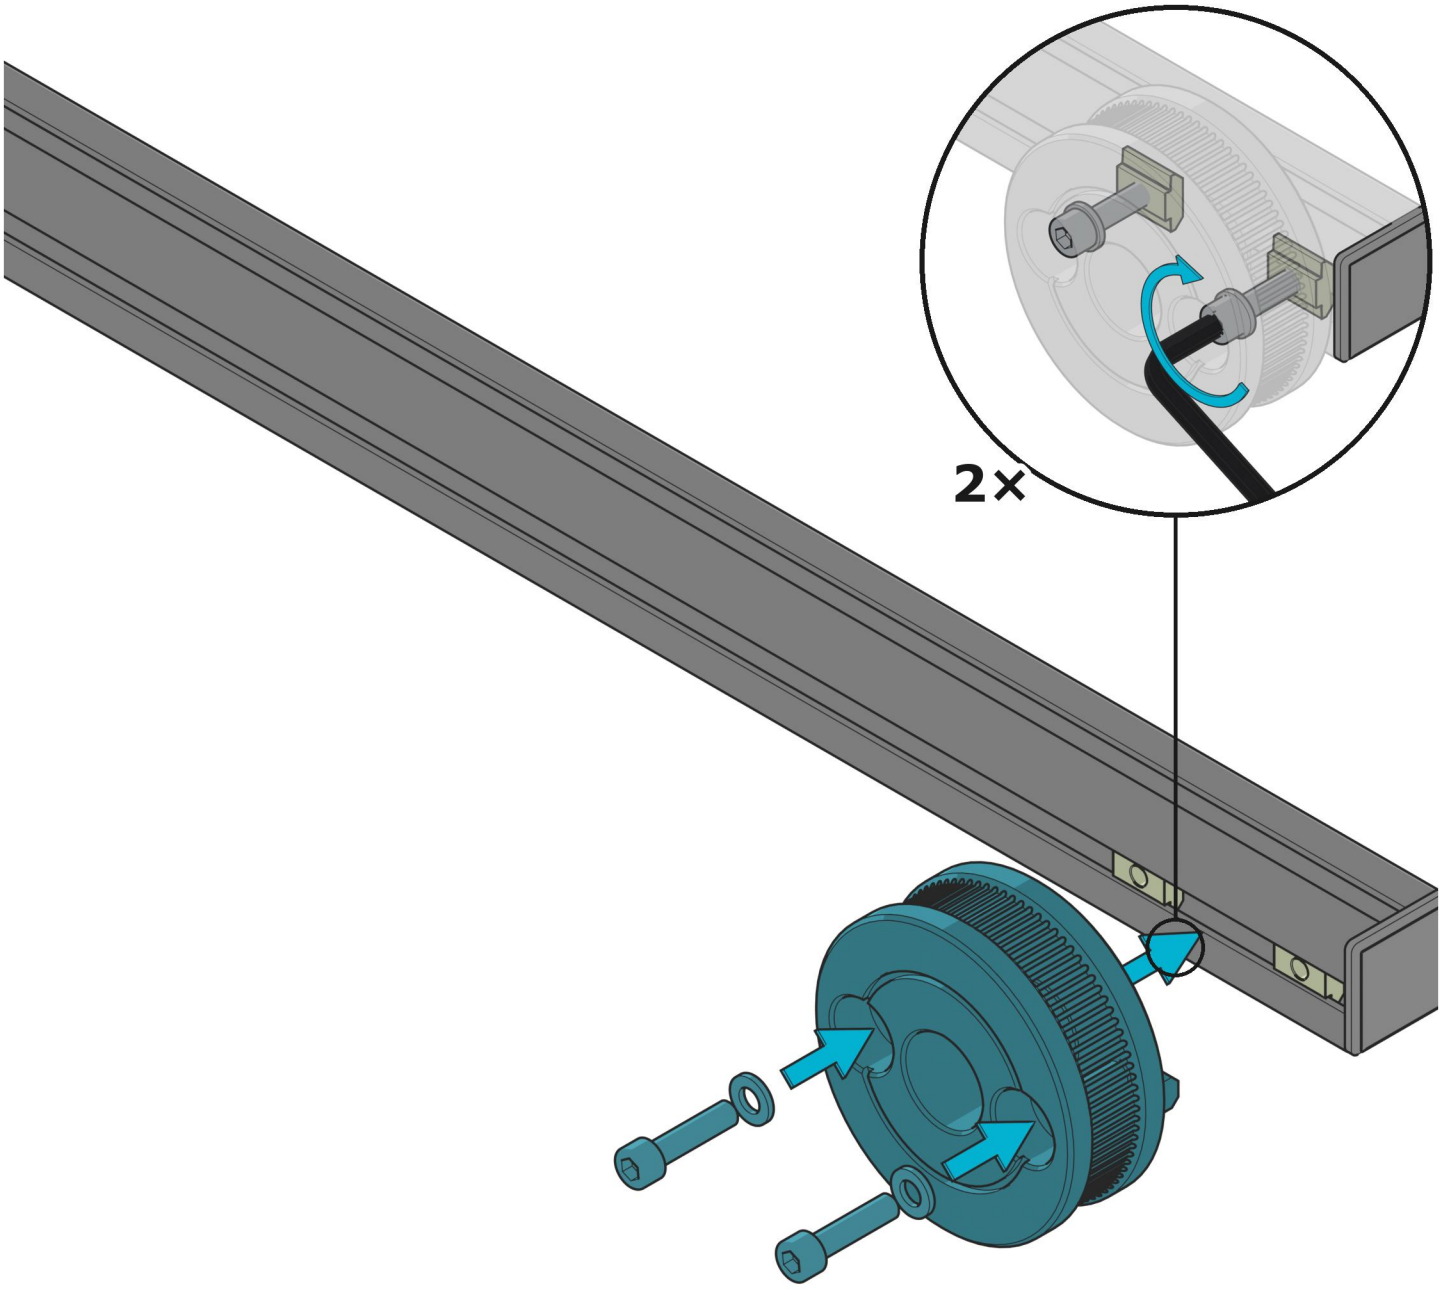


24

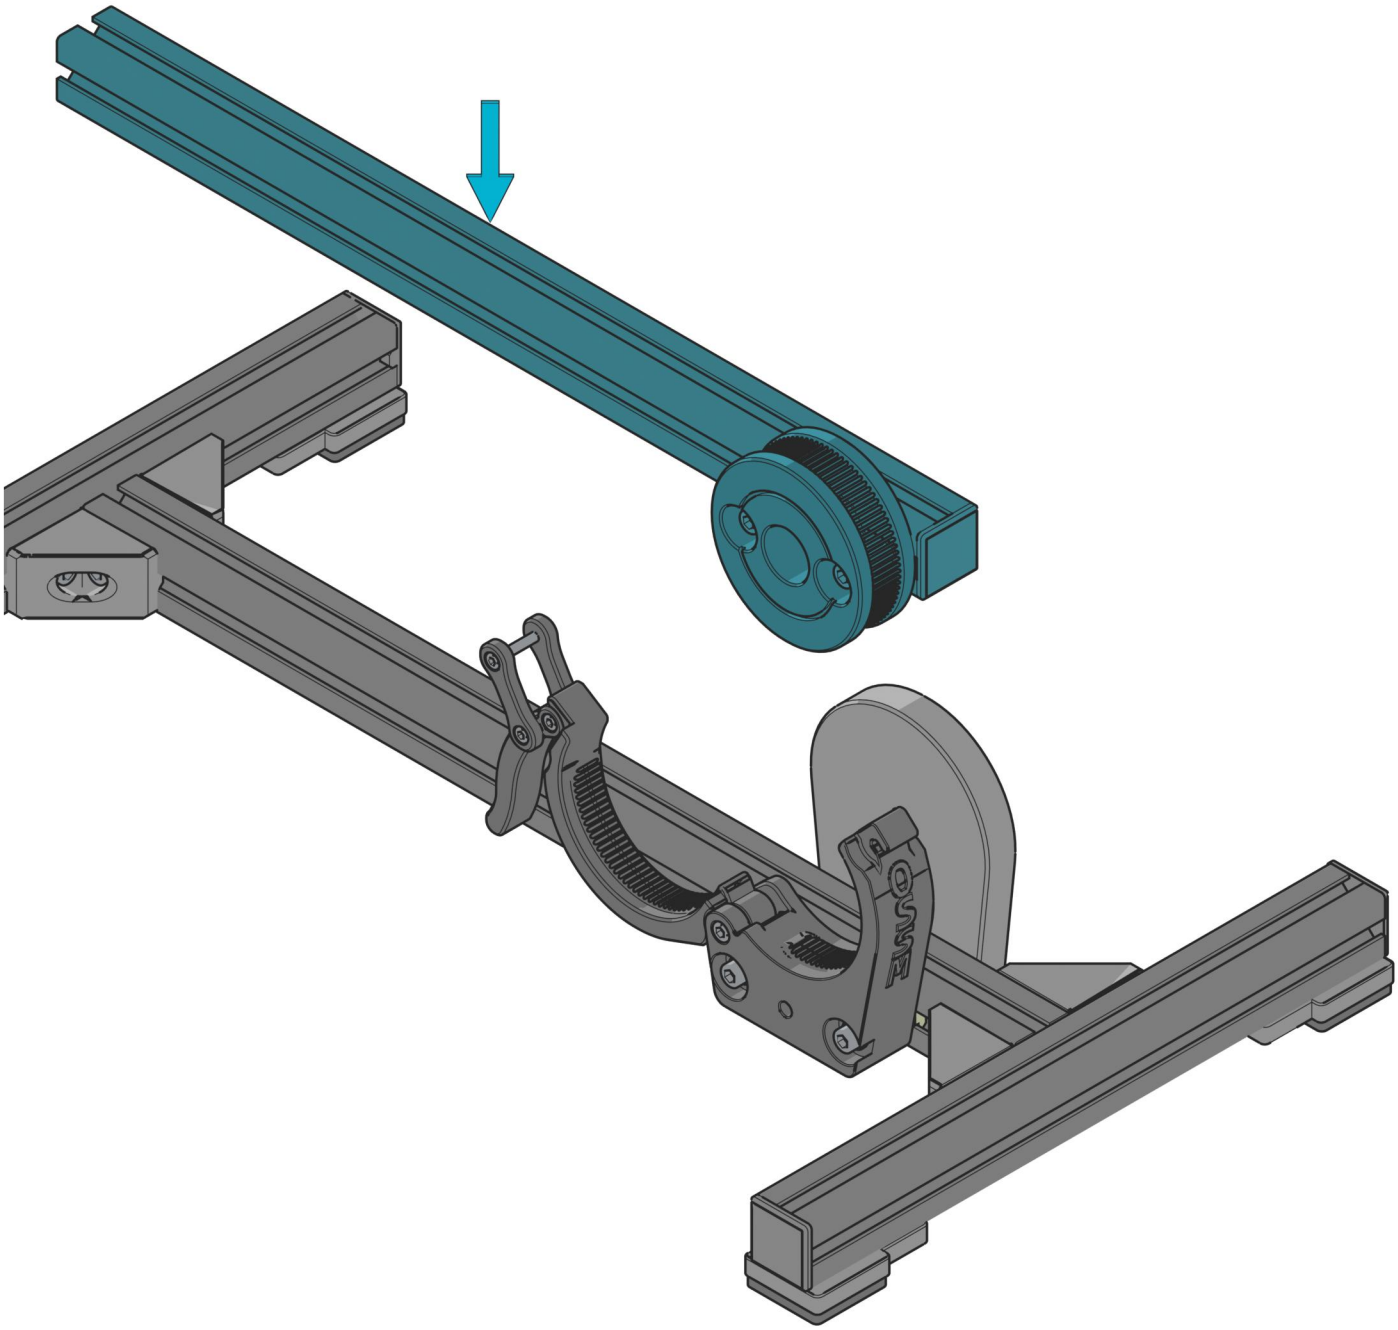


25

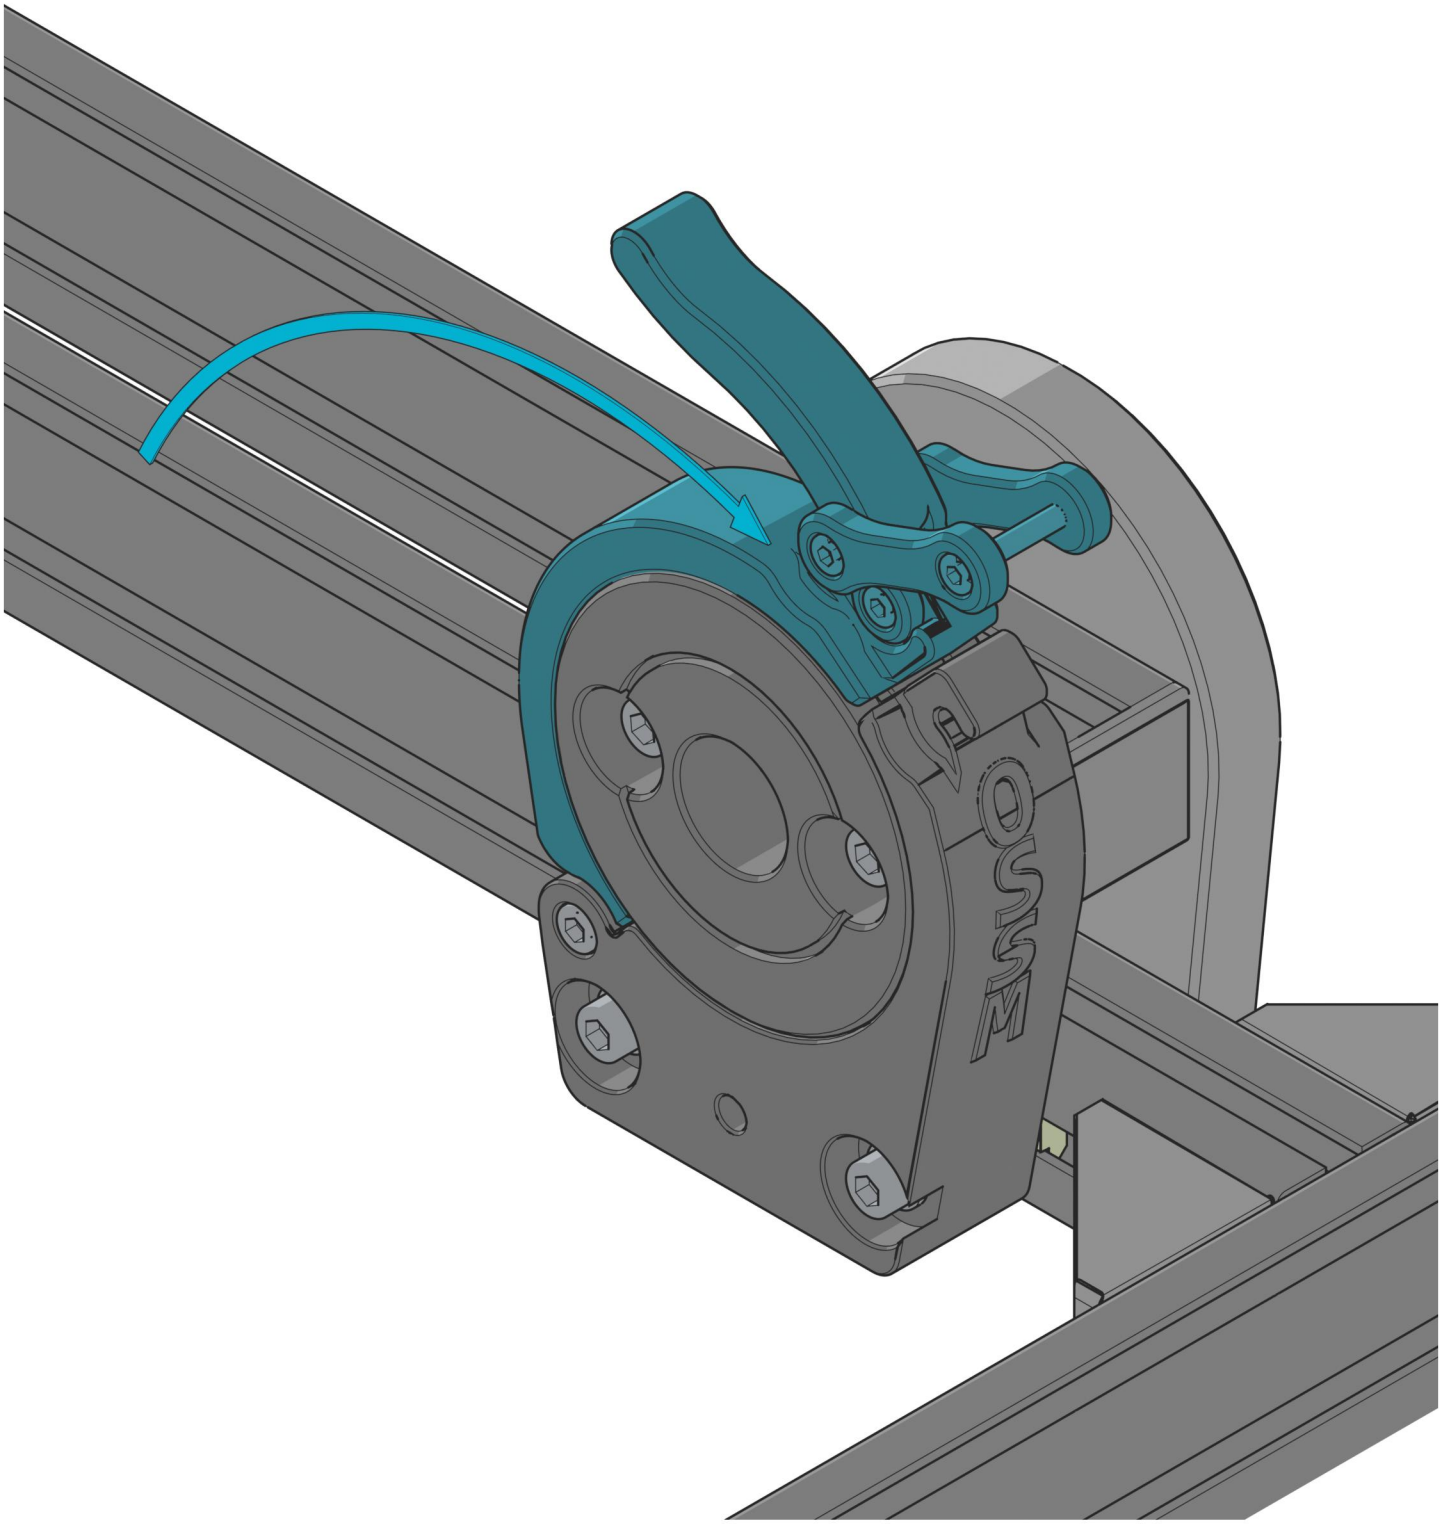

26

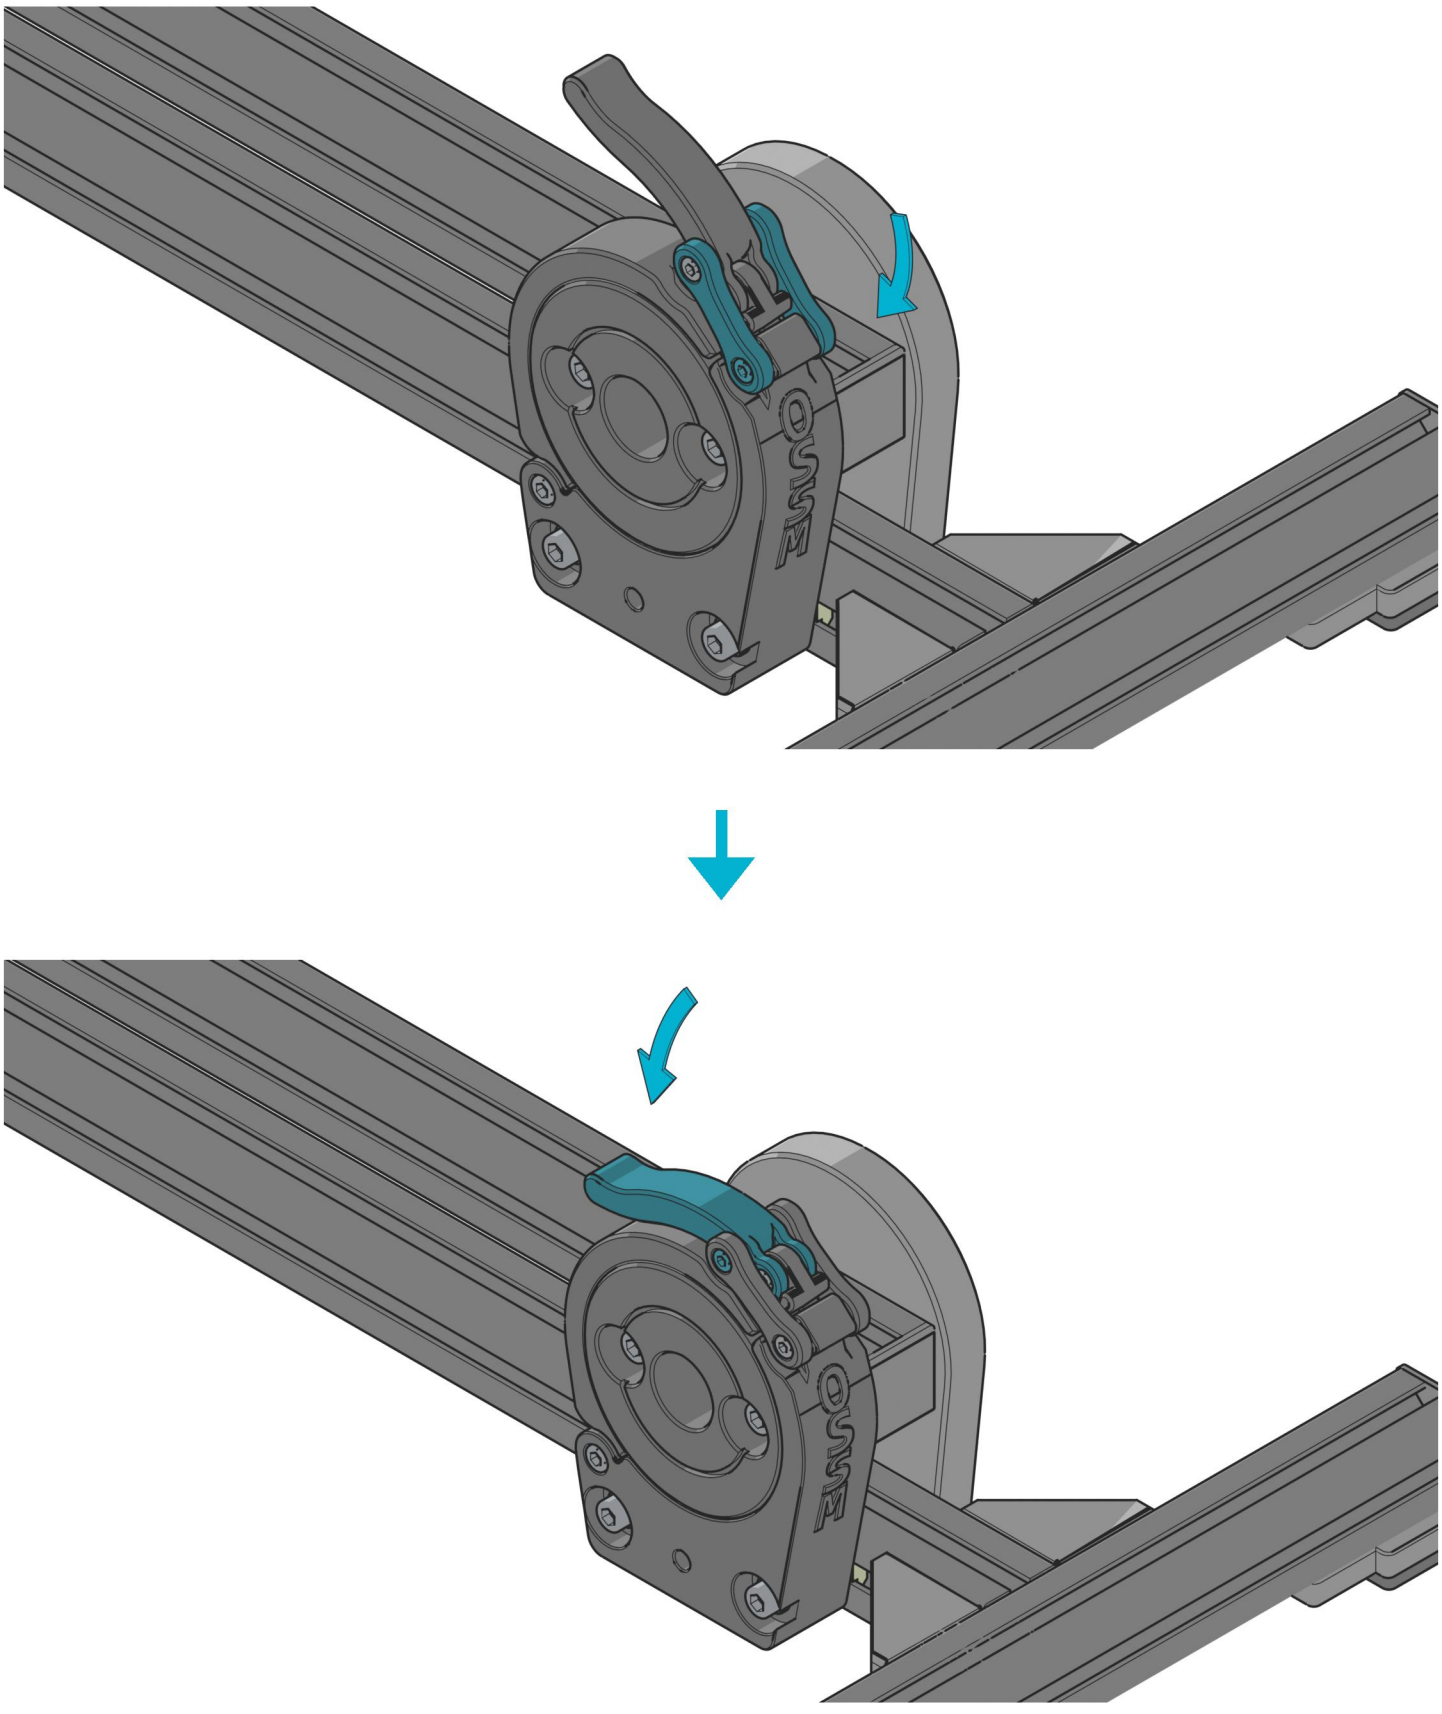

27








1×

M6×25 Screw

5 mm Hex key

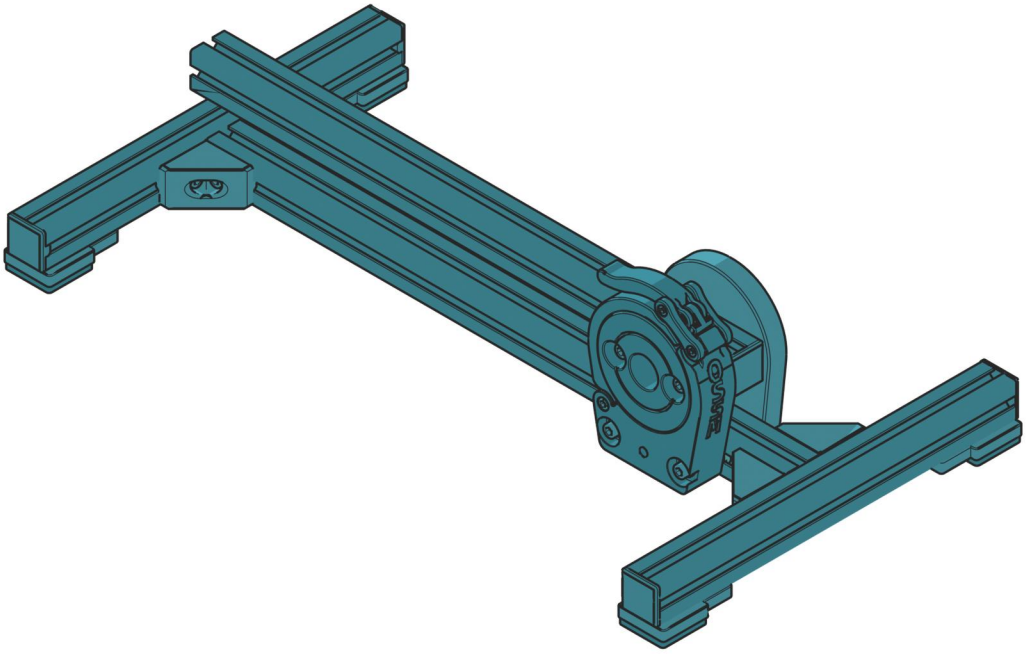




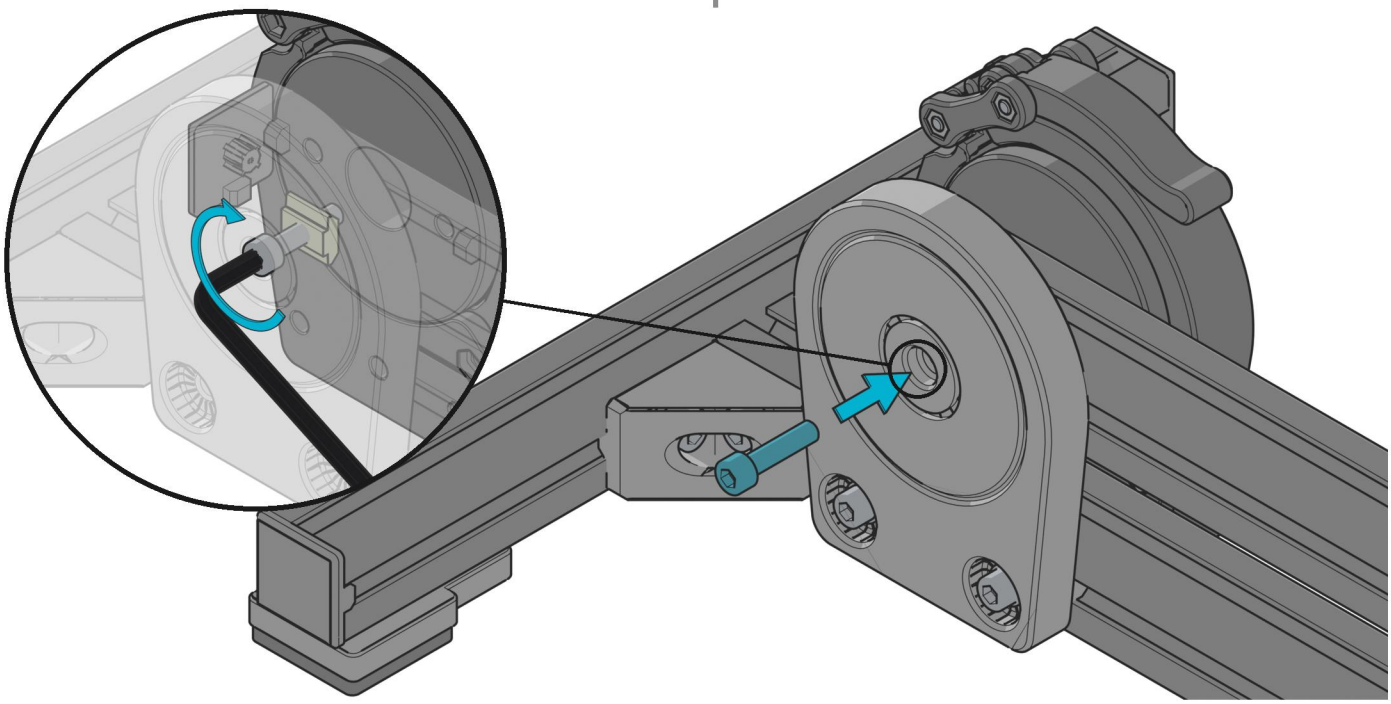

3 The PitClamp Mini




28




1× Link (nut side)

2× M4 Nut

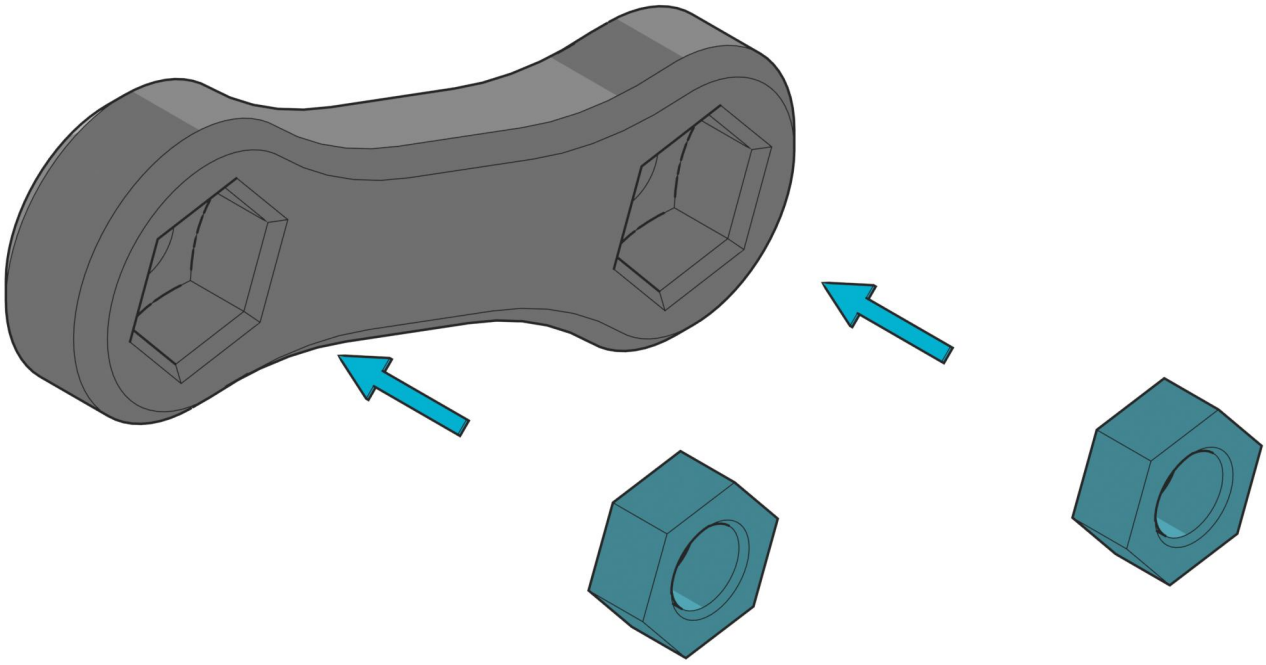


29




1×

Clasp with handle



1×

Link (bolt side)




1×


M4×25 Screw



3 mm Hex key

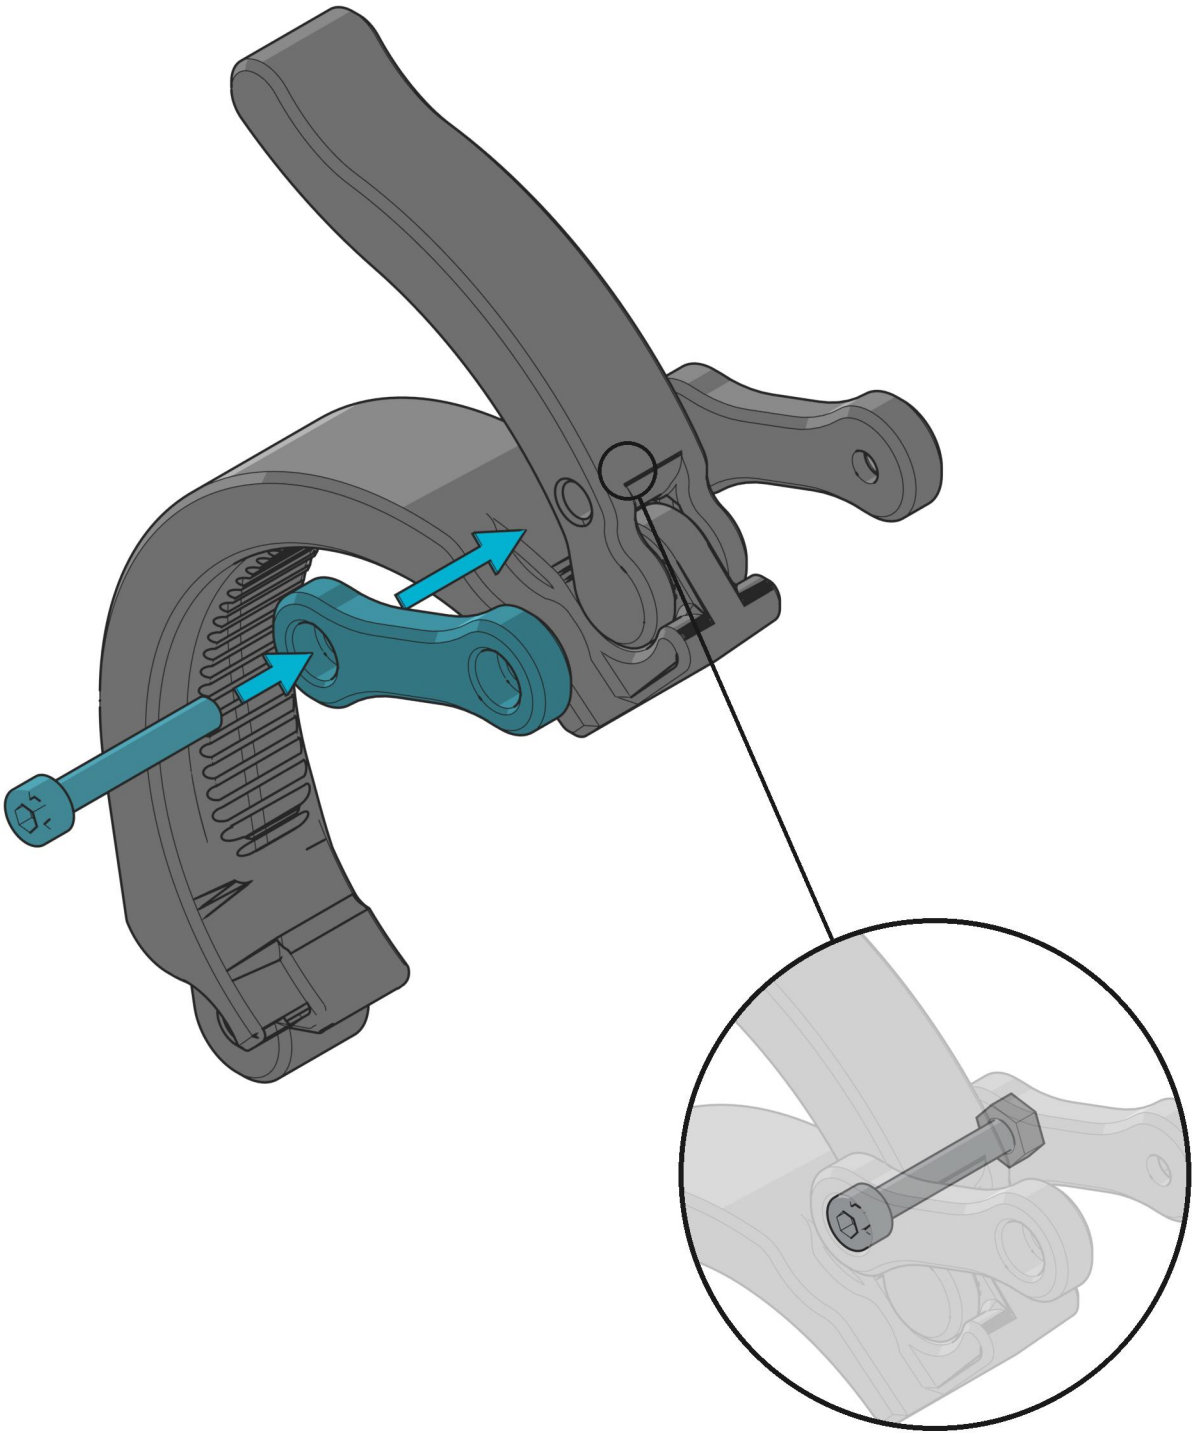


30






1×
M4×25 Screw


3 mm Hex key

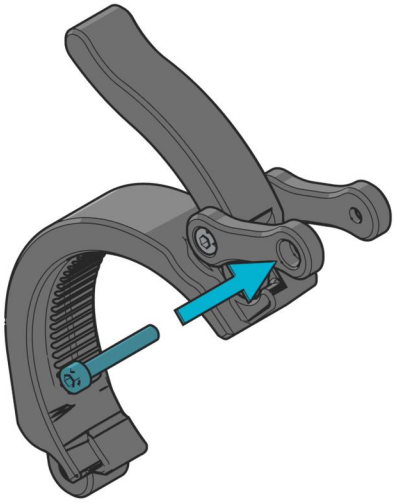



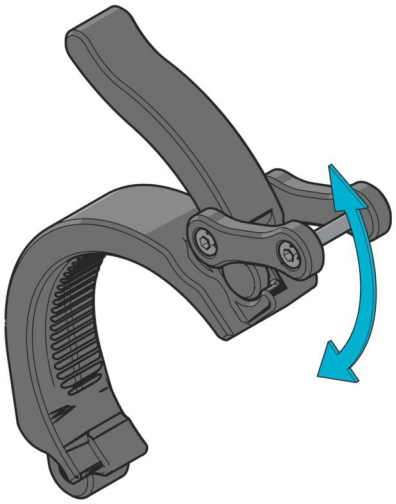



31

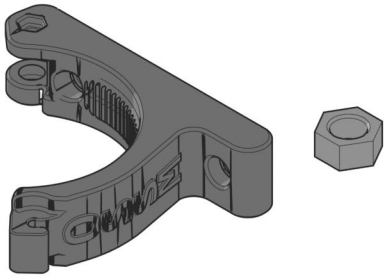


1× Upper clamp base

1× M5 Nut

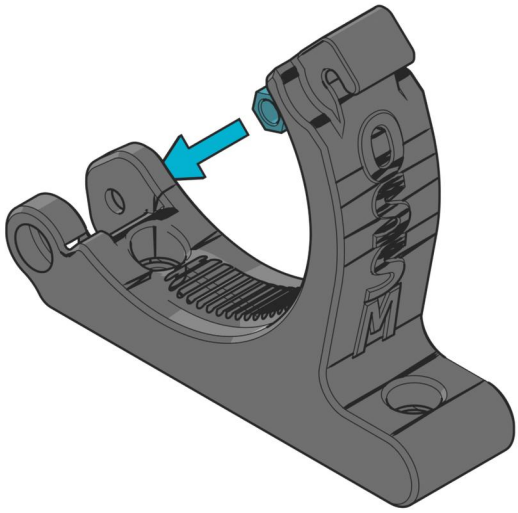

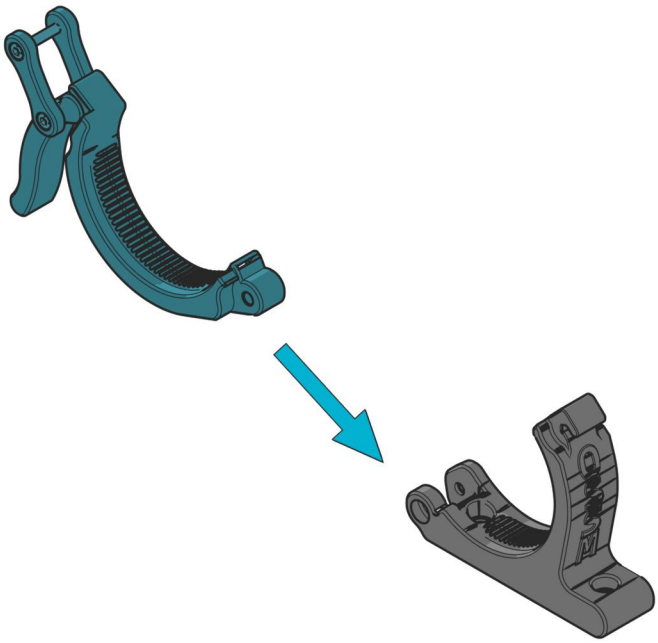


32






1×
M5×20 Screw


4 mm Hex key

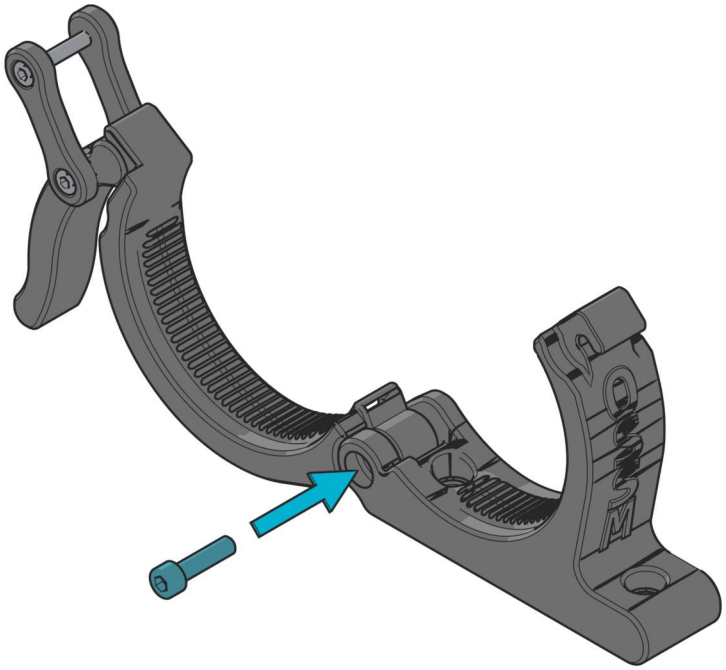




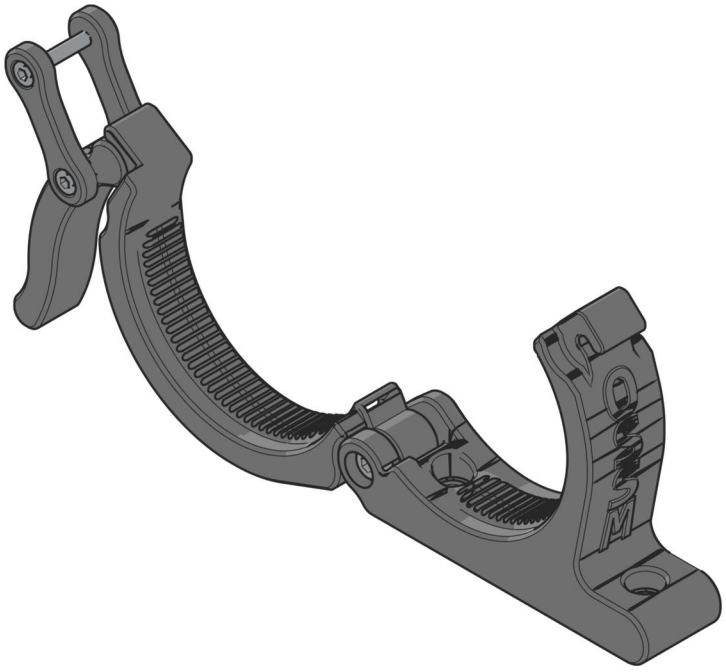


33




2×
M6 T-nut




Tape measure

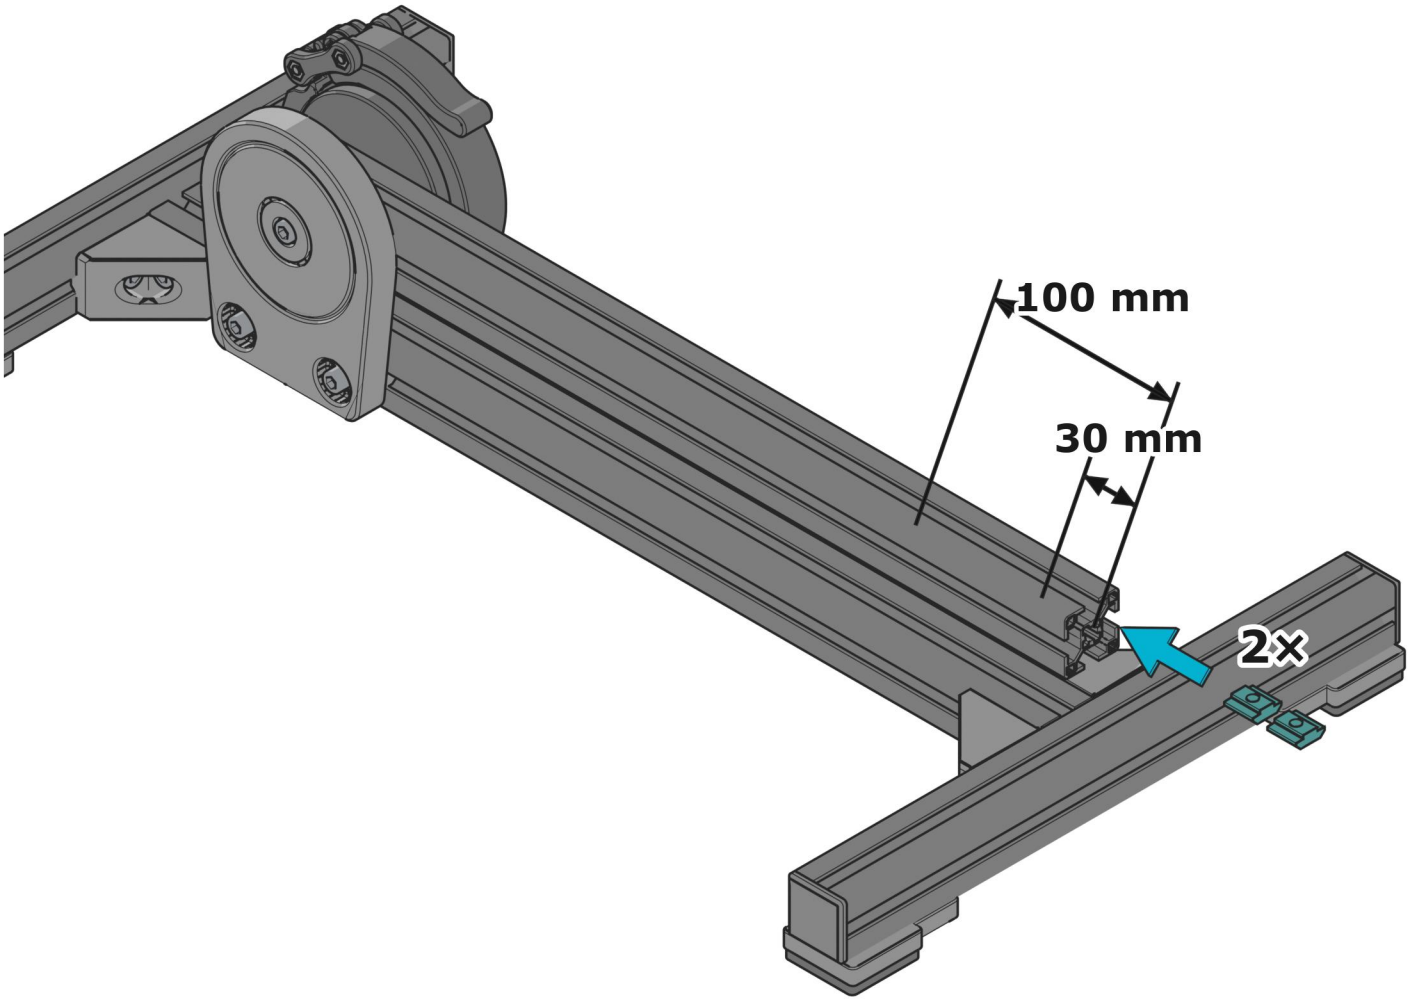


34




2×
M6 T-nut



Tape measure

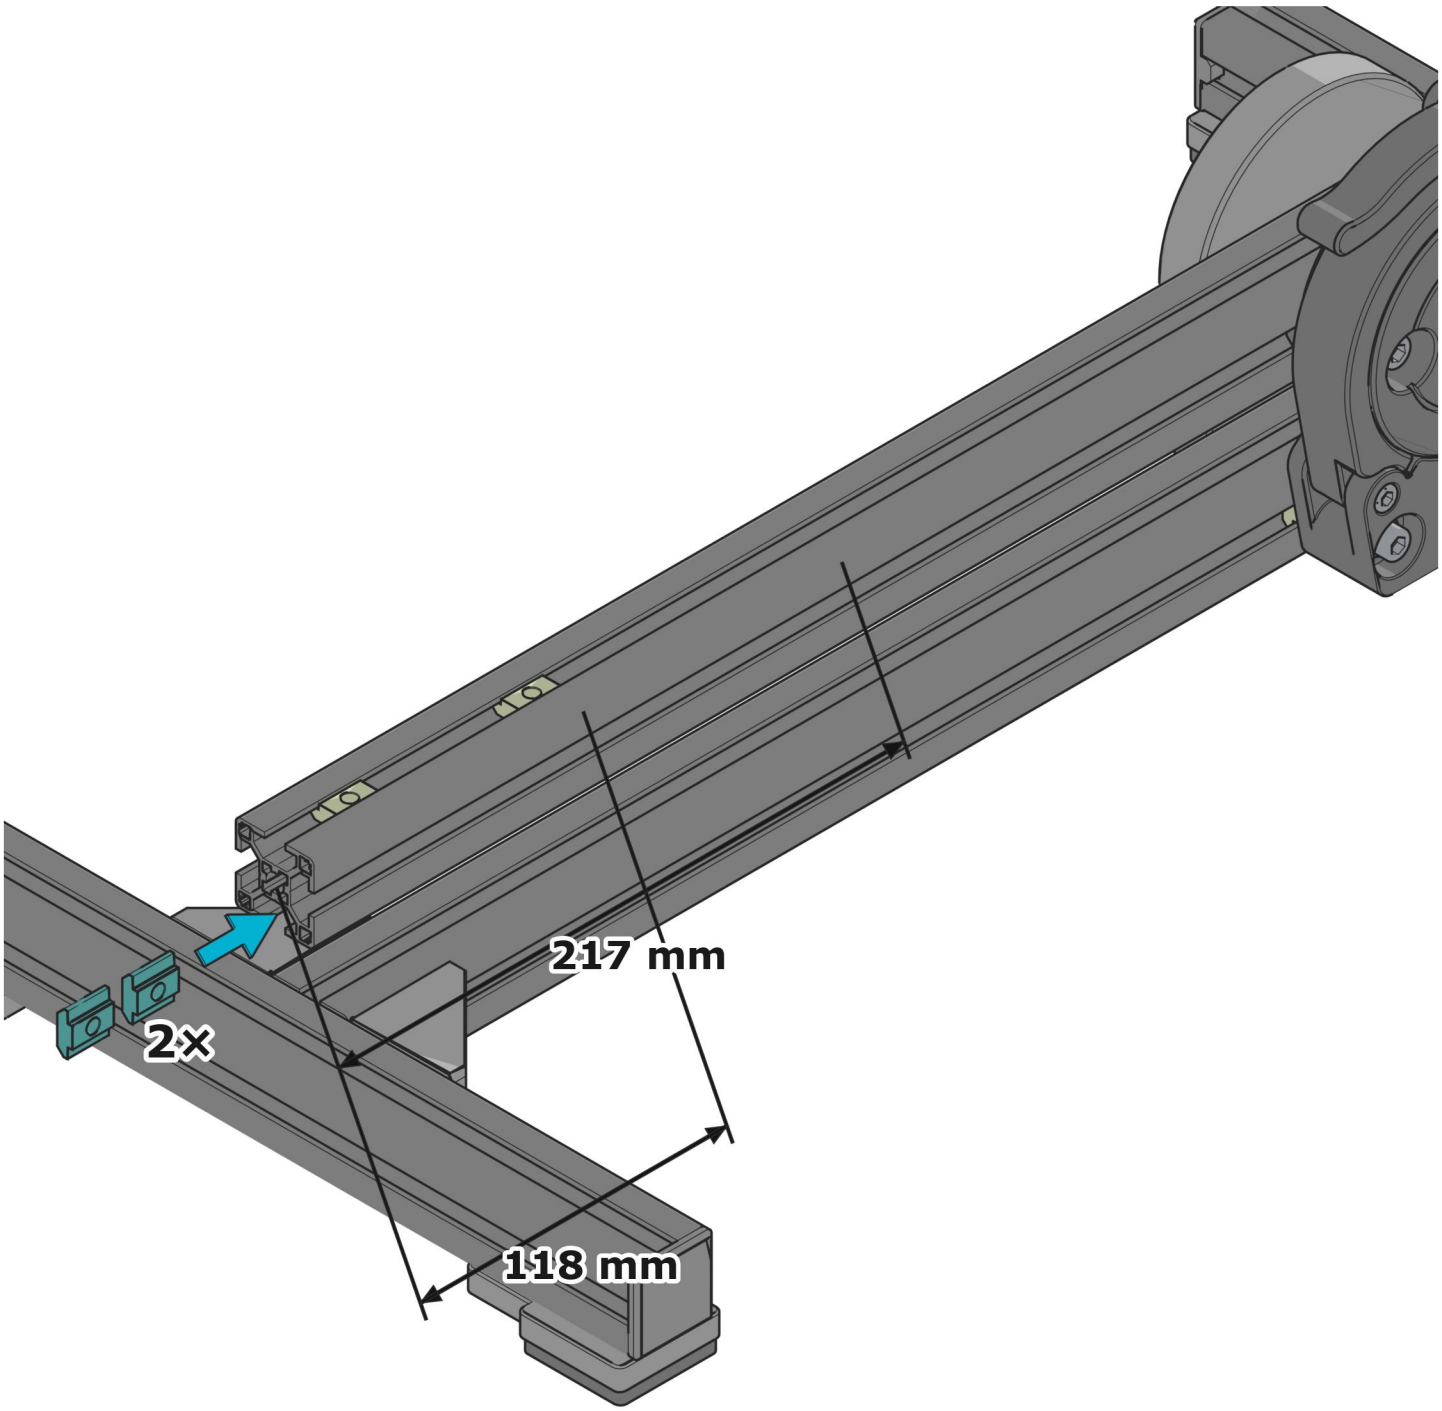


35




1×

End cap

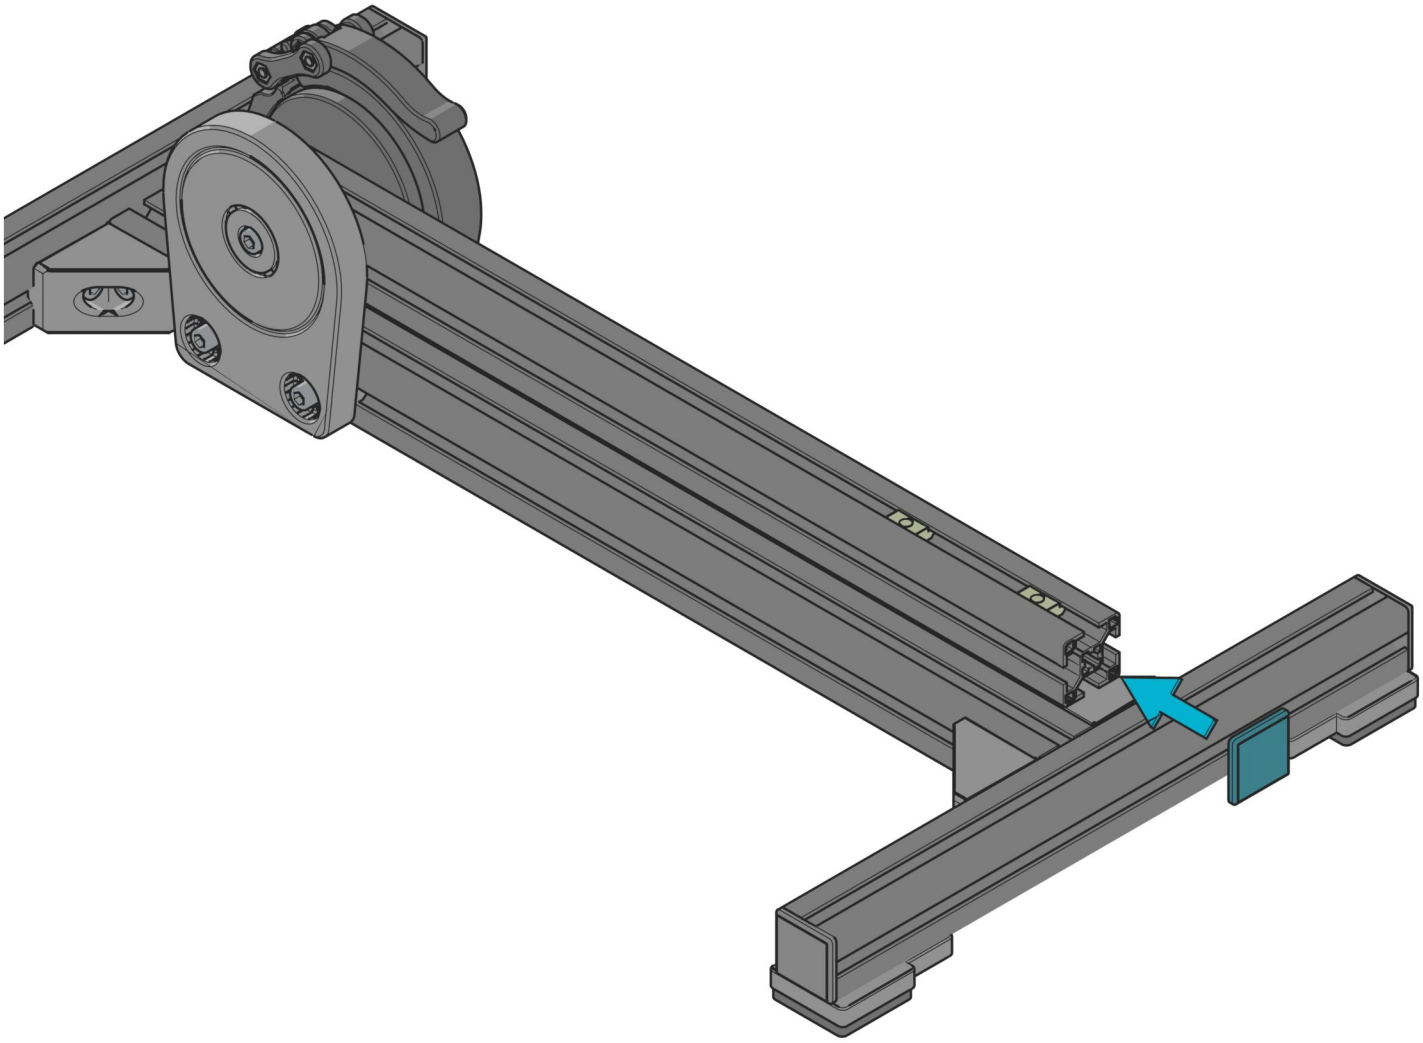


36






2× M6×16 Screw

5 mm Hex key

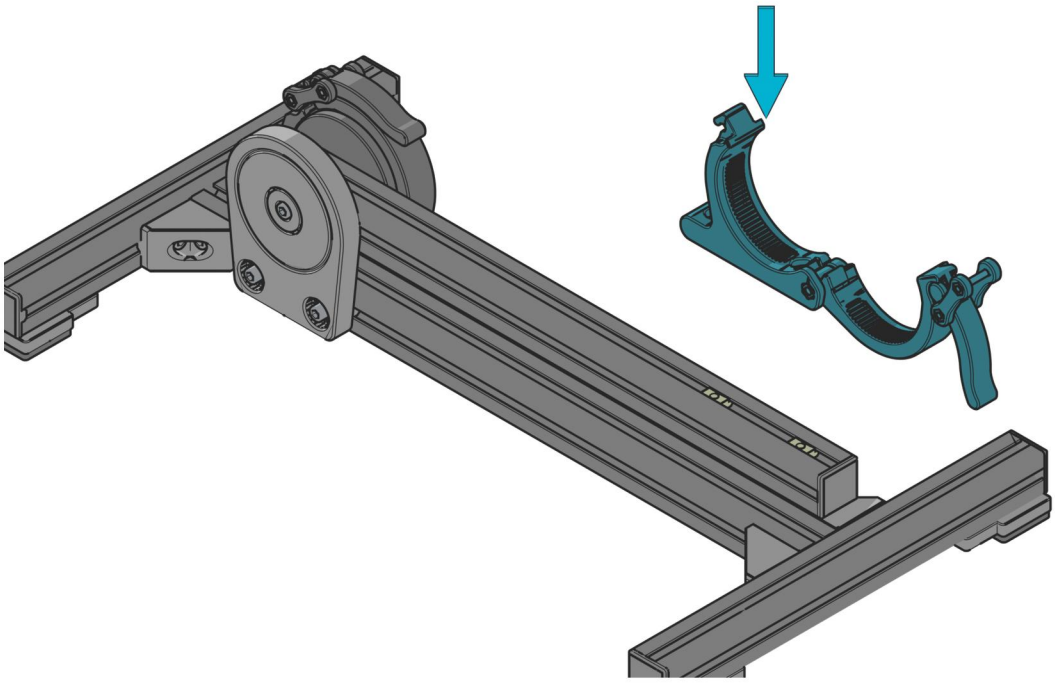

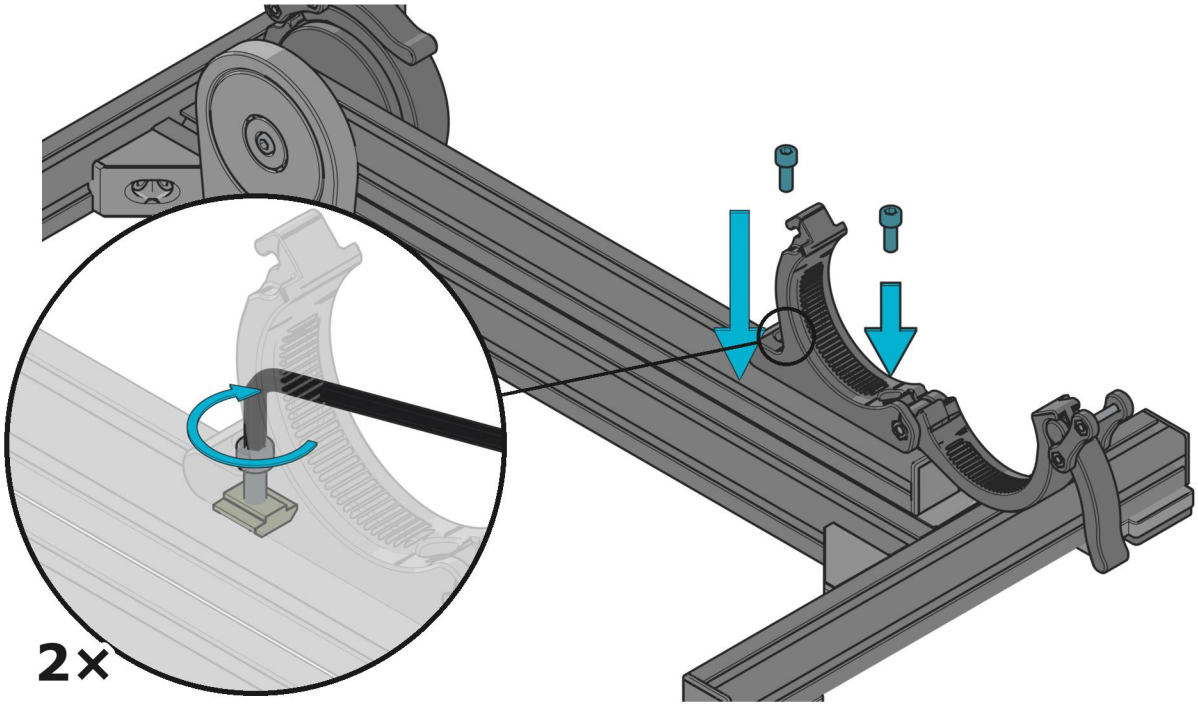



You may now proceed to installing the actuator.

RESEARCH + DESIRE

OSSM Stand Build Guide

PitClamp stand · Version 1.0.13

Support
support@researchanddesire.com

Assembly instructions
ohai.researchanddesire.com/ossm