



ORTHOGONAL VIEWS AND SECTION

Model-derived hidden-line removal; identical scale for all views.





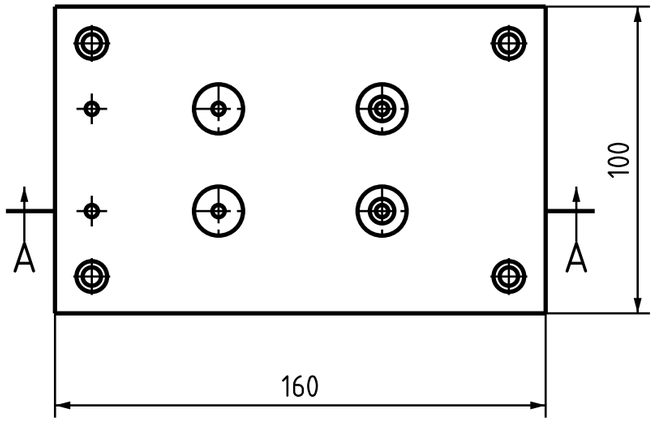

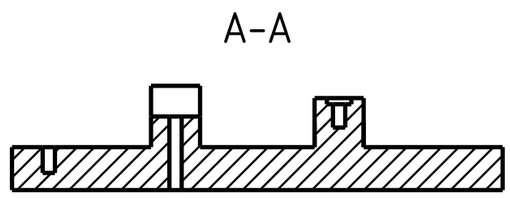

DRAFT - CONFORMANCE REVIEW PENDING

Nominal geometry only

OWNER CAD-ENV		DOCUMENT TYPE Part drawing	
TITLE alignment fixture			
IDENTIFICATION b349b2f3d7a0c6b6b3676d67		REV	SHEET 1/2
CREATOR	APPROVAL	ISSUE DATE 2026-11-09	
DRAFT	SCALE 1:2	mm	1st angle

FEATURE AND DRILLING SCHEDULE

Coordinates in the global model XY system. Diameters and depths in mm.

PAD: height upward from support. HOLE: depth downward from support top.

CB: counterbore diameter / depth from the same support top.

TYPE	FEATURE	SUPPORT	X	Y	SIZE	H / DEPTH	CB (D / DEPTH)
BASE	BasePad	XY / Z=0	0	0	160 x 100	14	-
PAD	Locator01	BasePad	53.3333	33.3333	⌀16	10	-
PAD	Locator02	BasePad	106.667	33.3333	⌀16	16	-
PAD	Locator03	BasePad	53.3333	66.6667	⌀16	20	-
PAD	Locator04	BasePad	106.667	66.6667	⌀16	8	-
HOLE	Pin01	Locator01	53.3333	33.3333	⌀4	24	-
HOLE	Pin02	Locator02	106.667	33.3333	⌀4	9.6	⌀8 / 2
HOLE	Pin03	Locator03	53.3333	66.6667	⌀4	34	-
HOLE	Pin04	Locator04	106.667	66.6667	⌀4	4.8	⌀8 / 2
HOLE	Bolt01	BasePad	12	12	⌀6	14	⌀10 / 7
HOLE	Bolt02	BasePad	148	12	⌀6	14	⌀10 / 7
HOLE	Bolt03	BasePad	12	88	⌀6	14	⌀10 / 7
HOLE	Bolt04	BasePad	148	88	⌀6	14	⌀10 / 7
HOLE	Dowel01	BasePad	12	33.3333	⌀4	8.4	-
HOLE	Dowel02	BasePad	12	66.6667	⌀4	8.4	-

Do not merge holes with different depths into a single through cut.

All listed rows are required. Names identify feature supports, not operation order.

No fit, surface finish, thread or material requirements are inferred from nominal geometry.

DRAFT - CONFORMANCE REVIEW PENDING

Nominal geometry only

OWNER CAD-ENV			DOCUMENT TYPE Part drawing
TITLE alignment fixture			
IDENTIFICATION b349b2f3d7a0c6b6b3676d67		REV	SHEET 2/2
CREATOR	APPROVAL		ISSUE DATE 2026-11-09
DRAFT	SCALE NTS (schedule)	mm	1st angle