



ORTHOGONAL VIEWS AND SECTION

Model-derived hidden-line removal; identical scale for all views.





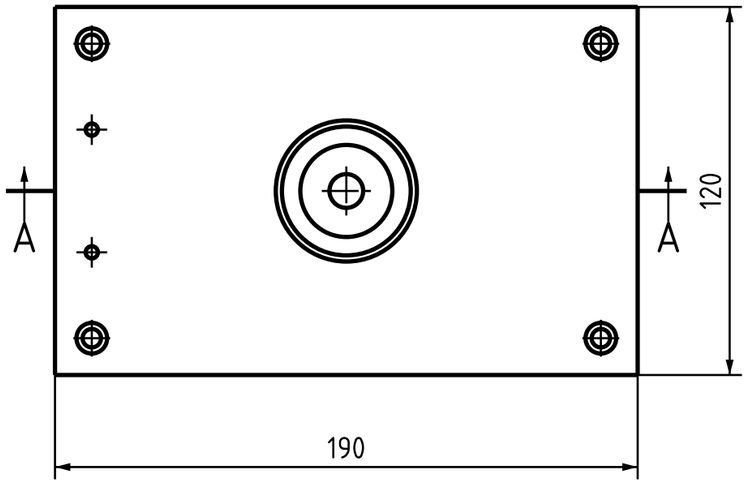

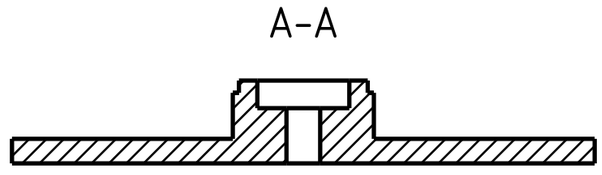

DRAFT - CONFORMANCE REVIEW PENDING

Nominal geometry only

OWNER CAD-ENV			DOCUMENT TYPE Part drawing
TITLE bearing cartridge			
IDENTIFICATION 1182d7756bcf93d004a90e5f		REV	SHEET 1/2
CREATOR	APPROVAL		ISSUE DATE 2026-11-09
DRAFT	SCALE 1:2	mm	1st angle

FEATURE AND DRILLING SCHEDULE

Coordinates in the global model XY system. Diameters and depths in mm.

PAD: height upward from support. HOLE: depth downward from support top.

CB: counterbore diameter / depth from the same support top.

TYPE	FEATURE	SUPPORT	X	Y	SIZE	H / DEPTH	CB (D / DEPTH)
BASE	BasePad	XY / Z=0	0	0	190 x 120	8	-
PAD	Hub	BasePad	95	60	⌀46	15	-
PAD	Pilot	Hub	95	60	⌀42	4	-
HOLE	Shaft	Pilot	95	60	⌀11	27	⌀30 / 9
HOLE	Bolt01	BasePad	12	12	⌀6	8	⌀10 / 4
HOLE	Bolt02	BasePad	178	12	⌀6	8	⌀10 / 4
HOLE	Bolt03	BasePad	12	108	⌀6	8	⌀10 / 4
HOLE	Bolt04	BasePad	178	108	⌀6	8	⌀10 / 4
HOLE	Dowel01	BasePad	12	40	⌀4	4.8	-
HOLE	Dowel02	BasePad	12	80	⌀4	4.8	-

Do not merge holes with different depths into a single through cut.

All listed rows are required. Names identify feature supports, not operation order.

No fit, surface finish, thread or material requirements are inferred from nominal geometry.

DRAFT - CONFORMANCE REVIEW PENDING

Nominal geometry only

OWNER CAD-ENV		DOCUMENT TYPE Part drawing	
TITLE bearing cartridge			
IDENTIFICATION 1182d7756bcf93d004a90e5f		REV	SHEET 2/2
CREATOR	APPROVAL	ISSUE DATE 2026-11-09	
DRAFT	SCALE NTS (schedule)	mm	1st angle