


Technical Data	STK SERIES CONNECTOR	
-----------------------	-----------------------------	---

Nomenclature: CON RF50 TNC PL ST M 5.6 MIL-G RoHS	Page No. 1 of 1
--	---------------------------

STK-571112111255	CON RF50 TNC PL ST M 5.6 MIL-G RoHS
-------------------------	-------------------------------------

OUTLINE DRAWING

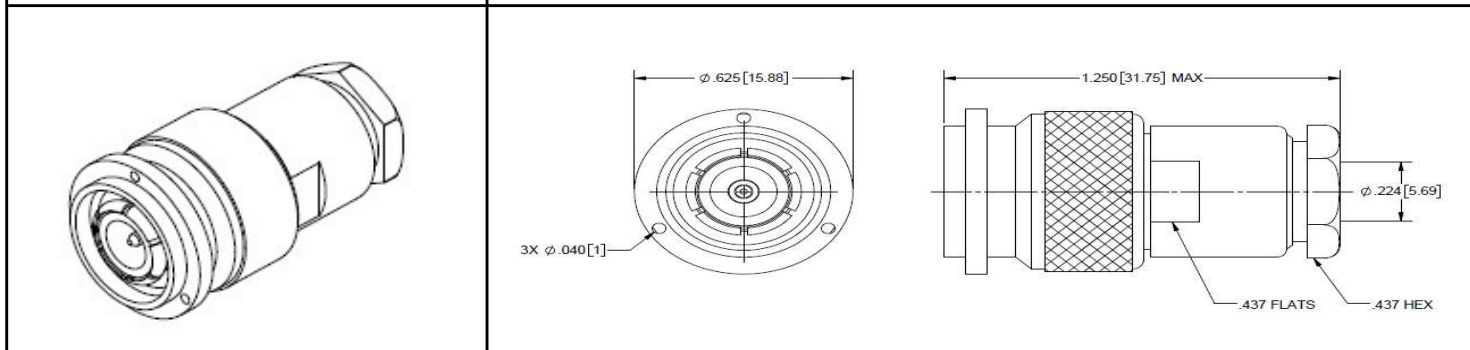

TECHNICAL DATA

ELECTRICAL DATA

IMPEDANCE	50 OHMS
VSWR:	1.30 :1 DC TO 11.0 GHz
FREQ. RANGE	DC TO 11.0 GHz

MECHANICAL INFORMATION

COMPONENTS	MATERIALS	PLATINGS (μm)
Outer conductor	Brass	SUCOPLATE (R) Plating
Centre contact	Brass	Gold Plating (Nickel underplated)
Coupling nut	Brass	SUCOPLATE (R) Plating
Body	Brass	SUCOPLATE (R) Plating
Cable entry centre contact		soldered
Mating cycles	500	
Weight	0.0196 kg	
Cable entry outer contact		clamped
Insulator	PFA / PTFE	-
Gasket	VMQ (Silicone rubber)	-

Originated	Date	Approved	Date	Rev	Amend	Name	Date	
Sang	27.10.25	Krishnamurthy	-	0	-	-	-	
Synergy Telecom P Ltd,				-	-	-	-	Email: sales.blr@rfconnector.in
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-	

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.
www.rfconnector.in