


Technical Data	STK SERIES ANTENNA	
----------------	--------------------	---

Nomenclature: CONN RF50 SMA ST PLUG M 2.92mm FLMT	Page No. 1 of 1
---	--------------------

STK-571128821251	CONN RF50 SMA ST PLUG M 2.92mm FLMT
------------------	-------------------------------------

OUTLINE DRAWING

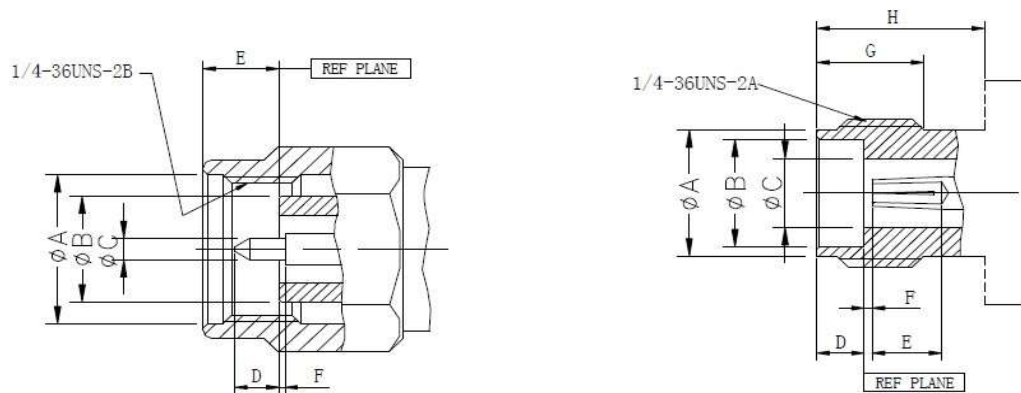

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50Ω
Frequency	DC-40GHz
VSWR	DC-40GHz.... 1.15:1 (max)
Center Contact	≤3.0mΩ Housing≤2.0mΩ
Insulation Resistance	≥3000MΩ
Dielectric Withstanding Voltage	750V
Durability	500 Cycles
Temperature Range	-55°C~+165°C

DIMENSION

COMPONENTS	MATERIALS	FINISH
Housing	Stainless Steel	Polished/Passivated
Center Contact	Beryllium Copper	Gold plated
Insulators	PEI or PEI&PTFE	

Originated	Date	Approved	Date	Rev	Amend	Name	Date	
Sang	27.10.25	Krishnamurthy	-	0	-	-	-	
Synergy Telecom P Ltd,				-	-	-	-	
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-	



Email: sales.blr@rfconnector.in

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in