



Technical Data

STK SERIES CONNECTOR



www.rfconnector.in



Nomenclature: CONN RF50 SMA PL M ST CAPT FL RG58



Page No.

1 of 1

STK-571114111492

CONN RF50 SMA PL M ST CAPT FL RG58

OUTLINE DRAWING

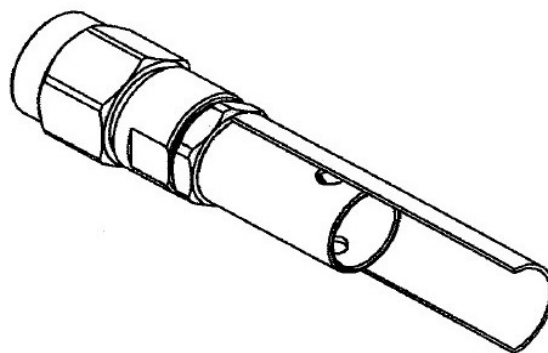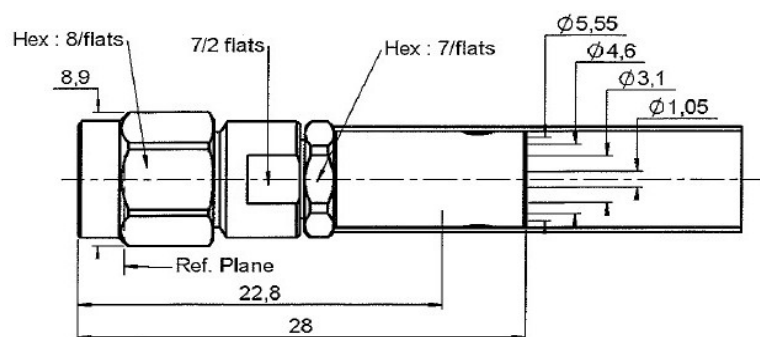

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency	0-12.4 GHz
VSWR	1.15 + 0.020 x F(GHz) Maxi
Insertion loss	0.06 $\sqrt{F(GHz)}$ dB Maxi
RF leakage	- (60 - F(GHz)) dB Maxi
Voltage rating	335 Veff Maxi
Dielectric with standing voltage	1000 Veff mini
Insulation resistance	5000 M Ω mini

MECHANICAL INFORMATION

Axial force – Mating end	27 N mini
Axial force – Opposite end	27 N mini
Torque	NA N.cm mini
Mating	100 N.cm
Panel nut	NA N.cm
Clamp nut	100 N.cm
A/F clamp nut	7.000 mm
Mating life	500 Cycles mini
Weight	5.356 g

ENVIRONMENTAL							
Operating temperature	-65/+165 ° C						
Hermetic seal	NA Atm.cm3/s						
Panel leakage	NA						
DIMENSIONS							
COMPONENTS	MATERIALS		PLATINGS (mm)				
BODY	STAINLESS STEEL		PASSIVATED				
CENTER CONTACT	BRASS		GOLD 1.3 OVER NICKEL 2				
OUTER CONTACT	-		-				
INSULATOR	PTFE		-				
GASKET	SILICONE RUBBER						
OTHERS PARTS	BRASS		NICKEL				
Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	01.11.25	Krishnamurthy	-	0	-	-	-
Synergy Telecom P Ltd, WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-
				-	-	-	-
				 Synergy Telecom Pvt Ltd Defence & Aerospace Division Email: sales.blr@rfconnector.in			
This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand. www.rfconnector.in							