


Technical Data	STK SERIES ANTENNA	
-----------------------	---------------------------	---

Nomenclature: UHF ANTENNA (410-470) MHz	Page No. 1 of 1
--	---------------------------

STK-587894151289	UHF ANTENNA (410-470) MHz
-------------------------	---------------------------

OUTLINE DRAWING

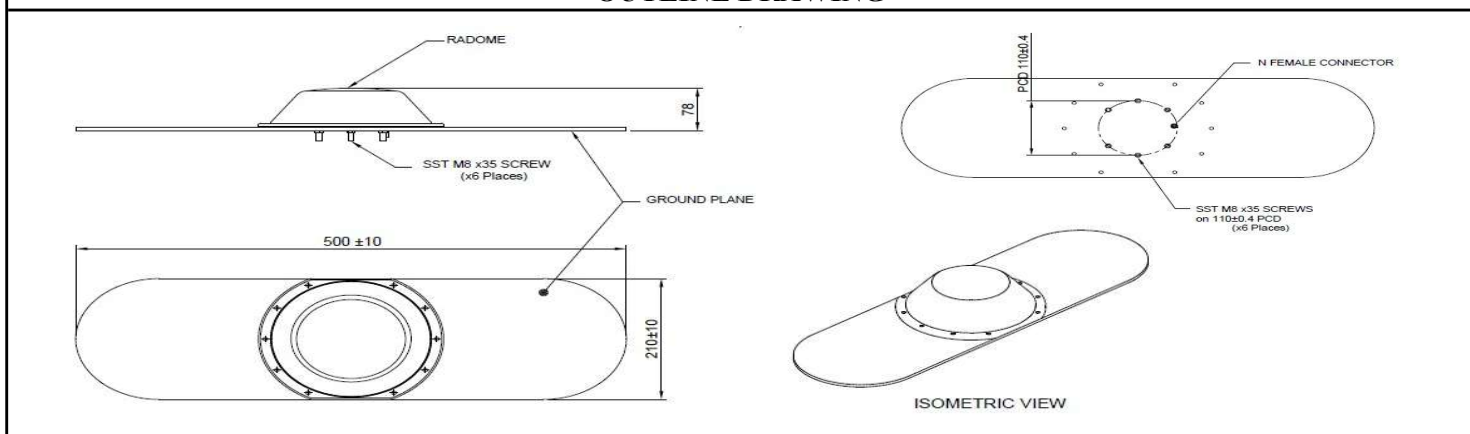

TECHNICAL DATA

ELECTRICAL DATA

Frequency	410-470Mhz
Polization	Vertical
Inpedence	50
Antenna Type	Ring- Resonator
Max-Power	50w
Gain	3.5dbi
Pattern	Omni Directional azimmuthal
Efficiency	95%
RF- Connection	N(F)
V.S.W.R	<1.70 (426 TO 430Mhz) and < 2.0 (410 to 470 Mhz)

MECHANICAL INFORMATION

Temp Range	(-60°C to +80°C)
Weight	2.5 kg Maxx
Ground plane Finish	Black / Grey/ Silver
Poof of Voltage	25kV AC/3kV DC
Water Protection	IP65
Mounting	6 Bolts on pitch circle 110MM,M8x48MM
Radome material/colour	ABS/GRAY

Originated	Date	Approved	Date	Rev	Amend	Name	Date	 Synergy Telecom Pvt Ltd Defence & Aerospace Division
Sang	11.10.25	Krishnamurthy	-	0	-	-	-	
Synergy Telecom P Ltd,				-	-	-	-	
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-	Email: sales.blr@rfconnector.in

This document is the property of **Synergy Telecom P Ltd**- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from **Defense & Aerospace division**. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in