


Technical Data	STK SERIES ANTENNA	
----------------	--------------------	---

Nomenclature: 4 HOLE FLANGE MOUNT PLUG	Page No. 1 of 1
--	--------------------

STK-571155621284	4 HOLE FLANGE MOUNT PLUG
------------------	--------------------------

OUTLINE DRAWING

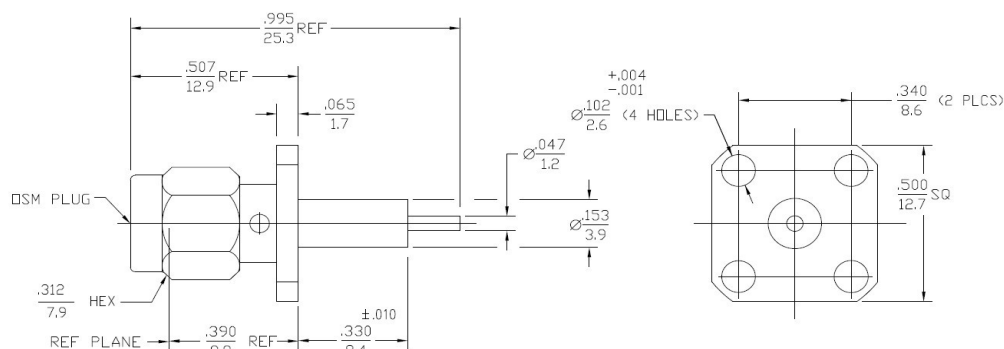

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50Ω
Insertion loss (db) Max	.03f (Ghz)
RF Leakage	-(60-F)(Ghz)
Frequency	DC UP TO 27GHz
VSWR	1.05 + 005f(GHz)
VRMS MIN	1000
CENTER CONTACT	2
OUTER CONTACT	2
CABLE TO HOUSING	N/A
I.R MEGOHMS	10000
Volt Rating	335

MECHANICAL INFORMATION

TORQUE	7-10 in - Lbs
Disenagage	2
AXIAL (Lbs)	6
Radial	4
Weight	TBD

DIMENSION

COMPONENTS	MATERIALS	FINISH
COUPLING NUT	STAINLESS STEEL	GOLD PLATE
DIELECTRIC	TFE	
RATAINING RING	BERYLLIUM COPPER	GOLD PLATE
GASKET	SILICONE RUBBER	
CENTER CONTACT	BERYLLIUM COPPER	

Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	27.10.25	Krishnamurthy	-	0	-	-	-
Synergy Telecom P Ltd,				-	-	-	-
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-



Email: sales.blr@rfconnector.in

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and all copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in