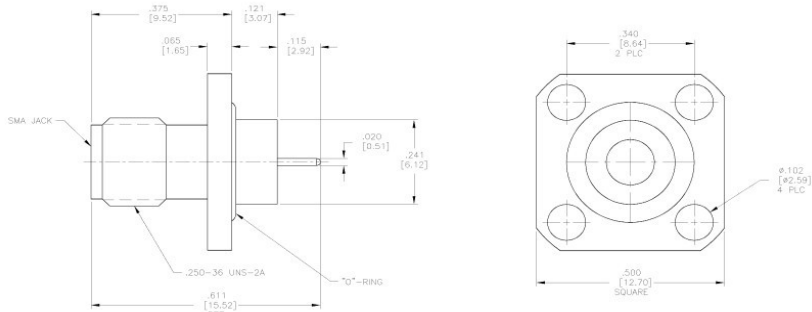


 Technical Data	STK SERIES CONNECTOR	 www.rfconnector.in						
Nomenclature:CONN SMA RCPT F HER 4/FMt			Page No. 1 of 1					
STK-571123981339		CONN SMA RCPT F HER 4/FMt						
OUTLINE DRAWING								
								
TECHNICAL DATA								
ELECTRICAL DATA								
Impedance	50 Ω							
Frequency Range	DC to 18 GHz							
VSWR	≤ 1.30:1 (typical)							
Insertion Loss	≤ 0.2 Db							
DielectricWithstandingVoltage	≥ 1000 V RMS							
nsulation Resistance	≥ 5000 MΩ							
ENVIRONMENTAL INFORMATION								
Operation temperature	-55 °C to +125 °C							
MECHANICAL INFORMATION								
Weight	-							
MATERIAL INFORMATION								
COMPONENTS		MATERIAL	PLATING					
BODY		STAINLESS STEEL	GOLD					
CENTER CONTACT		BERYLLIUM COPPER	GOLD					
DIELECTRIC		PTFE	-					
O RING		SILICON RUBBER	-					
Originated	Date	Approved	Date	Rev	Amend	Name	Date	 Synergy Telecom PVT Ltd Defence & Aerospace Division
Sang	01.12.25	Krishnamurthy	-	0	-	-	-	
Synergy Telecom P Ltd,				-	-	-	-	
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-	
This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.								www.rfconnector.in