

# Chapter 1: Tour of WICED Bluetooth

Time 1 Hour

After completing Chapter 1 (this chapter) you will understand a top-level view of the components of the WICED ecosystem including the chips, modules, software, documentation, support infrastructure and development kits. You will have WICED Studio installed and working on your computer and will understand how to program an existing project into a kit.

<b>1.1</b>	<b>TOUR OF WICED STUDIO SDK.....</b>	<b>2</b>
1.1.1	FIRST LOOK .....	2
1.1.2	PROJECT EXPLORER.....	4
<b>1.2</b>	<b>TOUR OF DOCUMENTATION.....</b>	<b>7</b>
1.2.1	IN THE SDK WORKSPACE.....	7
1.2.2	ON THE WEB.....	7
<b>1.3</b>	<b>REPORTING ISSUES.....</b>	<b>9</b>
<b>1.4</b>	<b>TOUR OF BLUETOOTH.....</b>	<b>10</b>
1.4.1	THE BLUETOOTH SPECIAL INTEREST GROUP (SIG) .....	10
1.4.2	CLASSIC BLUETOOTH .....	11
1.4.3	BLUETOOTH LOW ENERGY .....	12
1.4.4	BLUETOOTH HISTORY.....	12
<b>1.5</b>	<b>TOUR OF CHIPS.....</b>	<b>13</b>
<b>1.6</b>	<b>TOUR OF PARTNERS.....</b>	<b>14</b>
<b>1.7</b>	<b>TOUR OF DEVELOPMENT KITS.....</b>	<b>15</b>
1.7.1	<a href="#">CYPRESS CYW920706WCDEVAL</a> .....	15
1.7.2	<a href="#">CYPRESS CYW920719Q40EVB-01</a> .....	15
<b>1.8</b>	<b>EXERCISE(S) .....</b>	<b>16</b>
	EXERCISE - 1.1 CREATE A FORUM ACCOUNT.....	16
	EXERCISE - 1.2 OPEN THE DOCUMENTATION .....	17
	EXERCISE - 1.3 DOWNLOAD THE BLUETOOTH SPEC VERSION 5.0 .....	17


## 1.1 Tour of WICED Studio SDK


### 1.1.1 First Look

The WICED software tool is called "WICED Studio" and it is based on Eclipse.

WICED Studio is installed, by default, in `C:/Users/<UserName>/AppData/Local/WICED`. As a part of installing WICED Studio, an SDK Workspace is created, by default, in `C:/Users/<UserName>/My Documents/WICED-Studio-<version>/20719-B1_Bluetooth`. The SDK Workspace is where you will create your projects. Note that a new set of SDK Workspace files is created for each version of WICED Studio that you install. If you install a newer version of WICED Studio, your projects from the previous version will still be available in the SDK Workspace location associated with that previous version of WICED Studio. You must copy them over manually if you want to access them in the new version.

Once installed, WICED Studio will show up in Windows under Start > All Programs > Cypress > WICED-Studio. The first time you open WICED Studio, you will be asked for which platform you want to use. We will use *20719-B1\_Bluetooth* for this class, but if you used a different selection don't worry – you can change it easily from inside the tool using the dropdown menu.

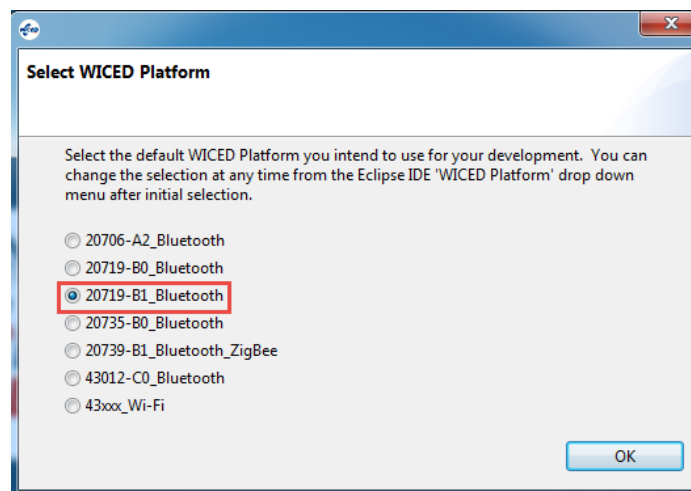

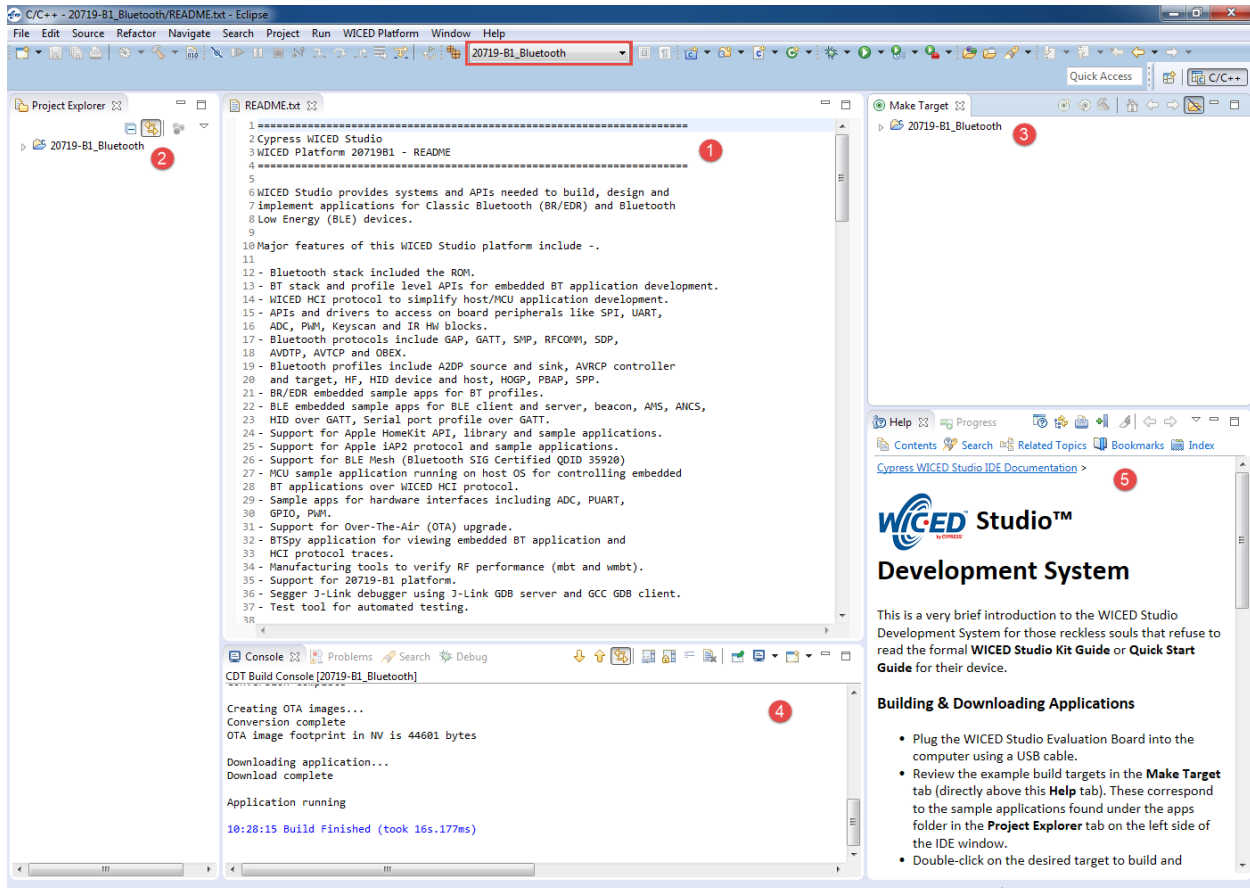


The major views are:

1. File Editor
2. Project Explorer
3. Make Target
4. Console
5. Help

If you close a view unintentionally, you can reopen it from the menu Window > Show View. Some of the views are under Window > Show View > Other... You can drag and drop windows and resize them as you desire.

### 1.1.2 Project Explorer

If you expand 20719-B1\_Bluetooth from the Project Explorer window you will see the following:

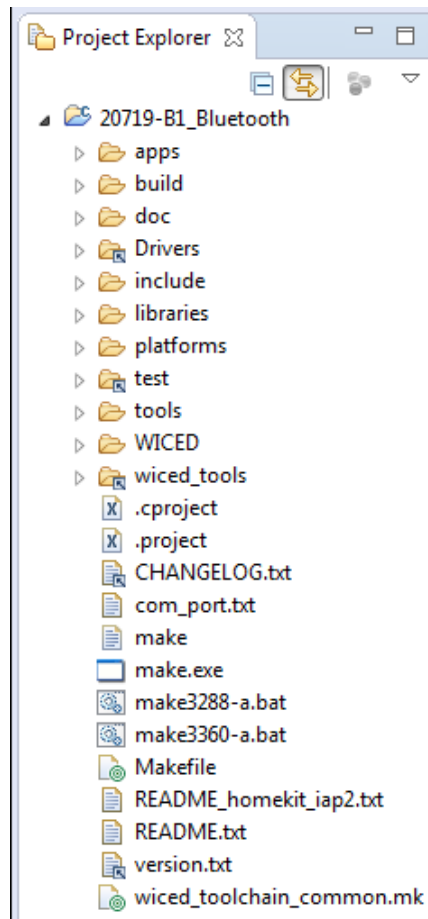

The README.txt file provides basic information about the SDK. This file is open by default in the editor window when the SDK is first opened. The file version.txt contains details of the version of WICED Studio that you have open. Other folders of interest in the Project Explorer are:

#### Apps

The *apps* folder is where all the example projects reside as well as where you will put your own projects. The SDK Workspace includes a wealth of example projects. These are broken into categories by folder name. A few of the useful ones are:


1. *snip*: Short examples that typically demonstrate one feature. For example:
  - a. *snip/hal/gpio* demonstrates GPIO use by reading buttons and blinking LEDs.
  - b. *snip/ble/mybeacon* demonstrates a beacon that sends vendor specific advertising data.
2. *demo*: More complex and complete demonstrations. For example:
  - a. *demo/hello\_sensor* demonstrates a BLE application with custom profiles implemented. A client peer application for Android, iOS, and Windows is also provided in the project.

## Doc

The doc folder contains the documentation for the SDK Workspace. Of particular interest is the API.html file which documents all of the WICED API functions. It is usually easier to use that file if you open it in a web browser of your choice rather than from inside WICED Studio. You can do this from WICED Studio by right clicking on API.html and choosing "Open With > System Editor". Depending on your web browser and settings, you may have to tell it to allow ActiveX controls to see the menus.

The first window you will see when you open the API.html file is shown below. You can enter search strings in the box in the upper-right corner. The list will filter dynamically as you type. For example, if you enter "wiced\_hal\_gpio" you will see a list of all WICED APIs that are used for controlling IOs.

Note: sometimes the search feature stops working. If this happens, close the browser page and reopen it.

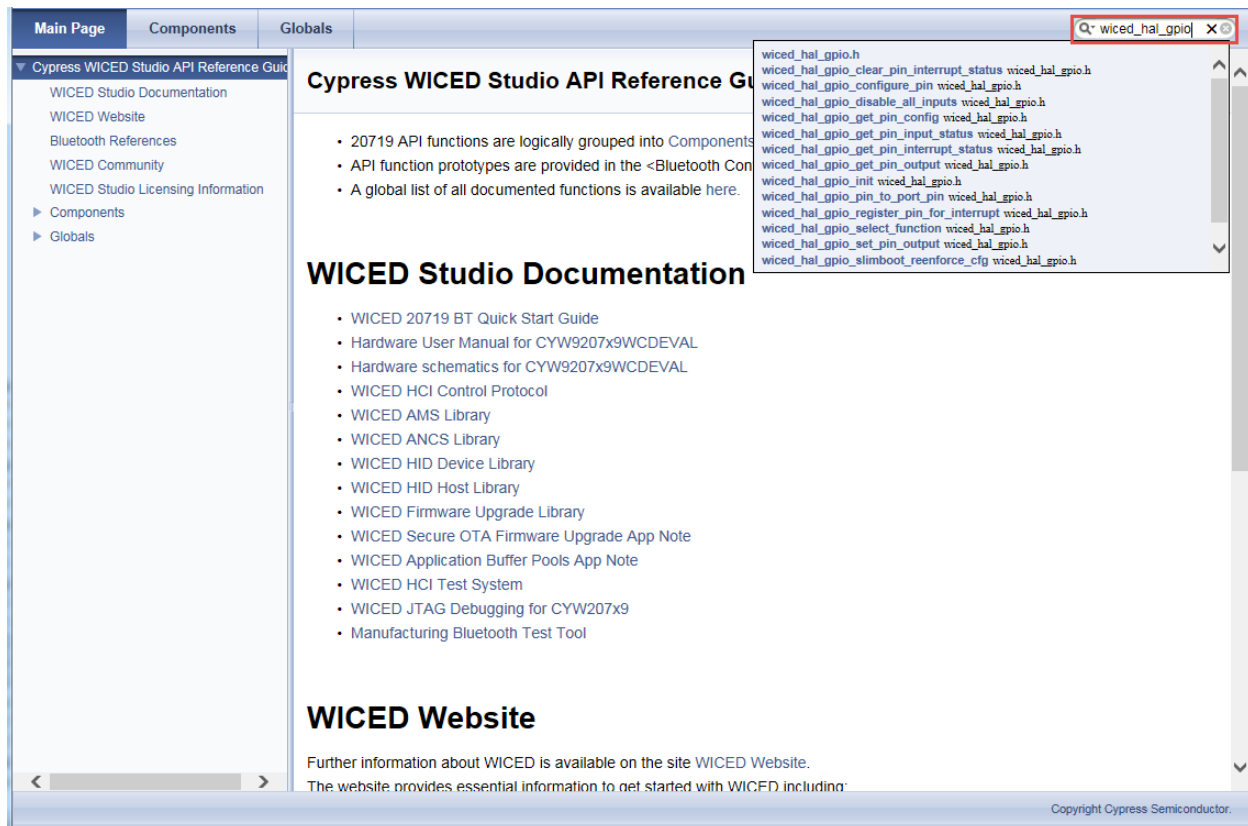

## Platforms

The platforms folder contains information on different kits (i.e. hardware platforms). These files are necessary to program a given project into specific hardware. In our case, the kit we are using is called CYW920719Q40EVB\_01. That kit has a platform folder, but since we are also using a shield attached to it, we will use a custom set of platform files that also includes the peripherals on the shield. You will have to copy over the custom platform files before using the shield and kit (this will be the first exercise



in Chapter 2). You can even create platform files for your own custom hardware that you design. We'll discuss the platforms folder in more detail in Chapter 2.

## **Libraries**

The libraries folder contains various sets of library function files. For example, there are libraries for working with different Bluetooth profiles such as A2DP (Advanced Audio Distribution Profile), HFP (Hands Free Profile), SPP (Serial Port Profile), etc. Many of the projects you look at and create later will use library functions.

## **Include**

The include folder contains header files that allow you to APIs for the different functions that your application requires. Many of these files and functions will be discussed in the next few chapters.


## **WICED**

The WICED folder contains the "guts" of the SDK such as global make files, linker scripts, etc.

## 1.2 Tour of Documentation

### 1.2.1 In the SDK Workspace

As discussed previously, the doc folder in the SDK Workspace contains various documents. The most important of these is the API guide but the folder also contains other useful documents such as debugging information, test system information, OTA update procedures, etc. The list of files in the doc directory looks like this:

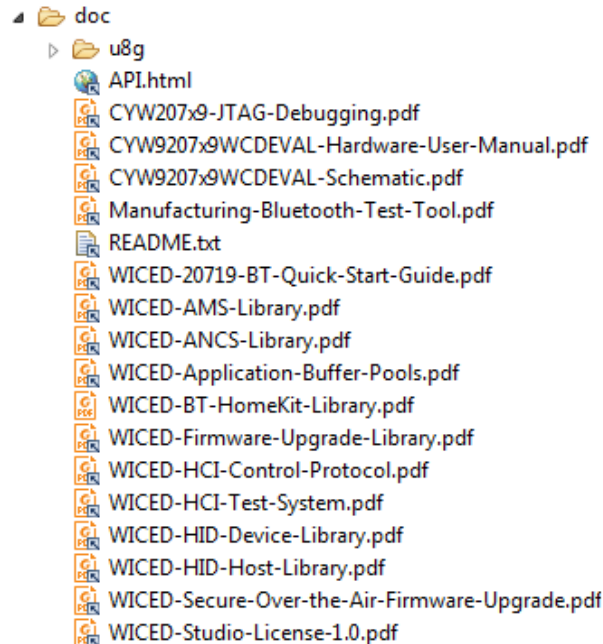

Each of the files in the doc folder can be accessed either from within the WICED Studio (the Project Explorer pane) or from Windows Explorer.

### 1.2.2 On the Web

Navigating to "[www.cypress.com](http://www.cypress.com) > Design Support > Community" will take you to the following site (the direct link is <https://community.cypress.com/welcome>):





Clicking on the Wireless icon and then the BLE and Bluetooth icon will take you to the community page as shown below. From this page, you can download WICED Studio, purchase kits, search for answers, ask questions, etc.

**WELCOME TO THE CYPRESS DEVELOPER COMMUNITY 3.0**

HOME

CONTENT


PEOPLE

PLACES

GET STARTED

SEARCH Developer Community

Home > All Places >



WICED Studio Bluetooth

Follow

Overview

Content

People

Subspaces

Actions

About

Share


**WHAT IS WICED STUDIO BLUETOOTH?**

WICED™ Studio Bluetooth consists of dual-mode Bluetooth solutions that support Bluetooth Classic i.e. Basic Rate (BR) and Enhanced Data Rate (EDR) as well as Bluetooth Low Energy (BLE) wireless connectivity to a range of embedded applications.

**RESOURCE PAGES**


CYW20706 Resource Page

GET STARTED




Join the Community

Register




Download SDK, Review Docs

More Info




Purchase a Development Kit

Kits



Find Answers or ask Cypress

Forums



Select a Production Partner

Partners

DISCUSSIONS AND ACTIVITY




### 1.3 Reporting Issues

If you are a Cypress employee and you find an issue in WICED Studio (bug, missing or confusing documentation, enhancement request), please use a "JIRA" to report it:

[jira.cypress.com](https://jira.cypress.com)

Click on Create to start submitting a JIRA. Use the project type of "WICED SDK with PSoC6 Support (CYSDK)" – just type CYSDK in to the project field - and then fill in as many details as you can to report the issue. If you are reporting an issue with a kit, use "KITS:" as a prefix to the summary.

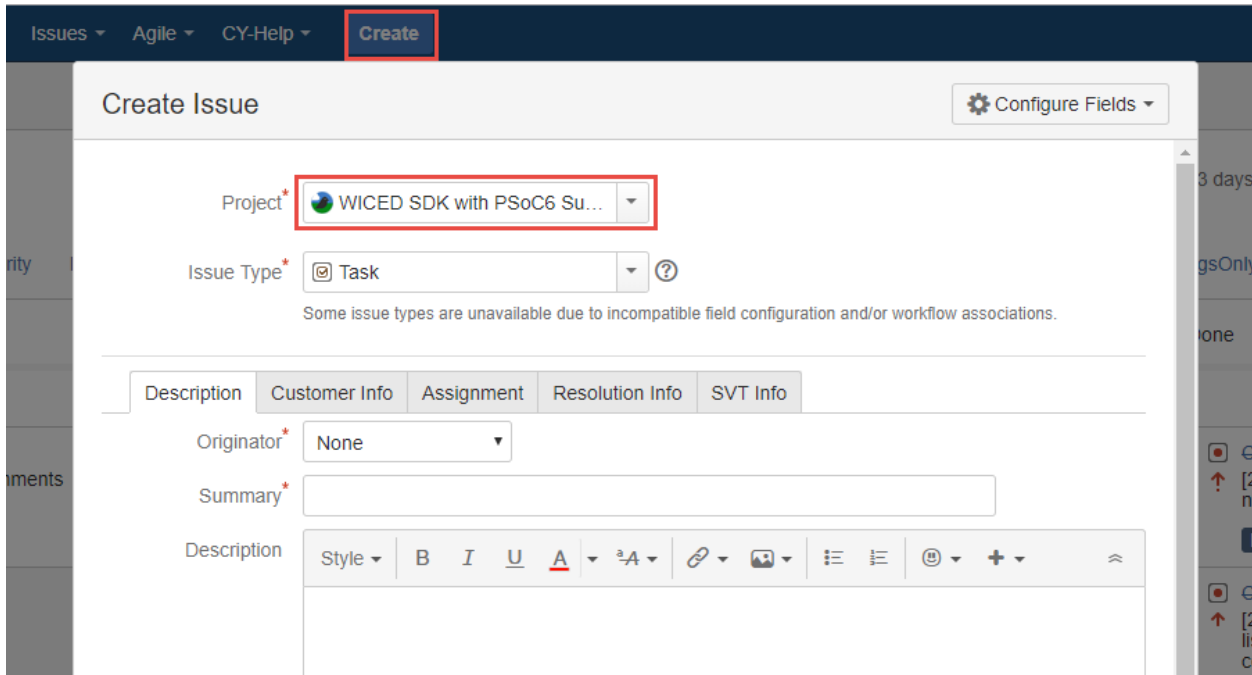

The screenshot shows the 'Create Issue' form in JIRA. The 'Project' dropdown is set to 'WICED SDK with PSoC6 Su...' and is highlighted with a red box. The 'Issue Type' dropdown is set to 'Task'. The 'Originator' dropdown is set to 'None'. The 'Summary' field is empty. The 'Description' field has a rich text editor toolbar with options like Bold, Italic, Underline, and Link.

Non-Cypress employees can ask questions and report issues in the developer community which was discussed in the previous section.


## 1.4 Tour of Bluetooth

Bluetooth is a short-range wireless standard that runs on the 2.4 GHz ISM (Industrial, Scientific, and Medical) band modulation. It is controlled by the Bluetooth Special Interest Group (SIG).

Discussions about Bluetooth are typically divided into *Classic Bluetooth* and *Bluetooth Low Energy*.

### 1.4.1 The Bluetooth Special Interest Group (SIG)

The Bluetooth Special Interest Group is an industry consortium that owns the specifications for Bluetooth. All the Bluetooth documentation is available at [www.bluetooth.org](http://www.bluetooth.org). You can register for an account on that website.

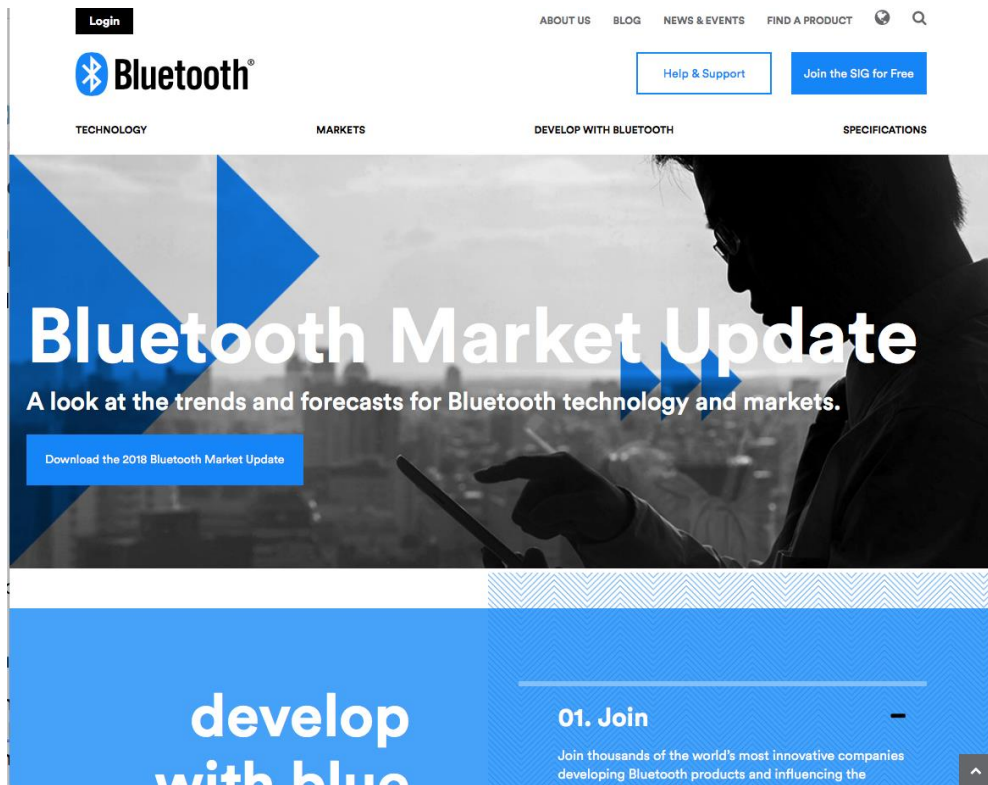

The current Bluetooth Specification is Version 5.0 is a 2822 page long document that can be downloaded from the Bluetooth SIG website at <https://www.bluetooth.com/specifications/bluetooth-core-specification>

# specifications



[Home](#) > [Specifications](#) > [Core Specifications](#)

[Working Groups](#)

**Core Specifications**

[Archived Specifications](#)

[Mesh Networking Specifications](#)

[Traditional Profile Specifications](#)

[Protocol Specifications](#)

[GATT Specifications](#)

[Errata Service Releases](#)

[Qualification Test Requirements](#)

[Assigned Numbers](#)

## Core Specifications

The *Bluetooth®* Core Specification defines the technology building blocks that developers use to create the interoperable devices that make up the thriving Bluetooth ecosystem. The Bluetooth specification is overseen by the Bluetooth Special Interest Group (SIG) and is regularly updated and enhanced by [Bluetooth SIG Working Groups](#) to meet evolving technology and market needs.

Specification	Version	Status	Adoption Date
CS Core Specification	<a href="#">5.0</a>	Active	06 Dec 2016
CSS Core Specification Supplement	<a href="#">7</a>	Active	06 Dec 2016
CSA Core Specification Addendum	<a href="#">6</a>	Active	12 Jul 2017

### 1.4.2 Classic Bluetooth

Classic Bluetooth uses 79 channels with a channel spacing of 1 MHz. It has three main speeds – Basic Rate (BR) and two Extended Data Rates (EDR). Each of these uses a different modulation scheme.

Mode	Speed	Modulation
Basic Rate	1 Mbps	GFSK (Gaussian Frequency Shift Keying)
Extended Data Rate	2 Mbps	$\pi/4$ DQPSK (Differential Quadrature Phase Shift Keying)
Extended Data Rate	3 Mbps	8DPSK (Octal Differential Phase Shift Keying)

The range is dependent on the transmission power which is divided into four classes:

Class	Max Permitted Power		Typical Range (m)
	(mW)	(dBm)	
1	100	20	100
2	2.5	4	10
3	1	0	1
4	0.5	-3	0.5

### 1.4.3 Bluetooth Low Energy

Bluetooth Low Energy (BLE) uses 40 channels with a channel spacing of 2 MHz (and so it shares the same range of frequencies with Bluetooth Classic). It provides much lower power consumption than Classic Bluetooth. Lower power is not achieved by reducing range (i.e. transmission power) but rather by staying actively connected for short bursts and being idle most of the time. This requires devices to agree on a connection interval. This connection interval can be varied to trade off the frequency of data transmitted vs. power. Therefore, BLE is excellent for data that can be sent in occasional bursts such as sensor states (i.e. temperature, state of a door, state of a light, etc.) but is not good for continuous streaming of data such as audio. BLE typically transmits data up to 1 Mbps, but 2 Mbps can be achieved in Bluetooth version 5 with shorter range.

Another name for Bluetooth Low Energy is "Bluetooth Smart". Devices that support both Classic Bluetooth and BLE are sometimes called "Bluetooth Smart Ready".

### 1.4.4 Bluetooth History

Bluetooth Spec	Year	Major Features
1.0	1999	Initial standard.
1.1	2002	Many bug fixes. Addition of RSSI and non-encrypted channels.
1.2	2003	Faster connection and discovery. Adaptive Frequency Hopping (AFH) Host Control Interface (HCI) Addition of flow control and retransmission.
2.0 + EDR	2004	Addition of EDR (up to 3 Mbps).
2.1 + EDR	2007	Addition of Secure Simple Pairing (SPP) and enhanced security. Extended Inquiry Response (EIR).
3.0 + HS	2009	Addition of HS which uses Bluetooth for negotiation and establishment, then uses an 802.11 link for up to 24 Mbps. This is called Alternative MAC/PHY (AMP). Addition of Enhanced Retransmission Mode (ERTM) and Streaming Mode (SM) for reliable and unreliable channels.
4.0 + LE	2010	Addition of BLE. Addition of Generic Attribute Profile (GATT). Addition of Security Manager (SM) with AES encryption.
4.1	2013	Incremental software update.
4.2	2014	LE secure connections with data packet length extension. Link Layer privacy. Internet Protocol Support Profile (SPP) version 6.
5	2016	LE up to 2 Mbps for shorter range, or 4x range with lower data rate. LE increased packet lengths to achieve 8x data broadcasting capacity.


## 1.5 Tour of Chips

Device	Key Features	Notes
CYW20706	<ul style="list-style-type: none"> <li>• Bluetooth BR, EDR and LE 5.0</li> <li>• ARM Cortex-M3</li> <li>• 848 kB ROM</li> <li>• 352 kB RAM (data and patches)</li> <li>• 2 kB NVRAM</li> </ul>	
CYW20719	<ul style="list-style-type: none"> <li>• Bluetooth BR, EDR and LE 5.0</li> <li>• 2 Mbps LE v5</li> <li>• 96 MHz ARM Cortex-M4</li> <li>• Single Precision FPU</li> <li>• 2 MB ROM</li> <li>• 1 MB On-Chip Flash</li> <li>• 512 kB RAM</li> </ul>	

The Cypress CYW20719 is an enhanced ultra-low power (ULP), highly integrated, and dual-mode Bluetooth wireless MCU. By leveraging the all-inclusive development platform WICED Studio, it allows you to implement the industry's smallest-footprint, lowest-power Bluetooth Low Energy (BLE) and dual mode Bluetooth applications quickly. CYW20719 is a Bluetooth 5.0 compliant SoC with support for Bluetooth Basic Rate (BR), Enhanced Data Rate (EDR), and BLE. CYW20719 supports all optional LE features as per Bluetooth core specification v4.2 and the LE 2 Mbps feature as per specification v5.0.

Manufactured using an advanced 40 nm CMOS low-power process, the CYW20719 employs the highest level of integration to eliminate all critical external components, thereby minimizing the device's footprint and the costs associated with implementing Bluetooth solutions. A 96 MHz CM4 CPU coupled with 1-MB on-chip flash and 2-MB ROM for stack and profiles offers significant processing power and flash space to customers for their applications. CYW20719 is the optimal solution for a range of battery-powered single/dual mode Bluetooth internet of things applications such as home automation, HID, wearables, audio, asset tracking, and so on.

## 1.6 Tour of Partners

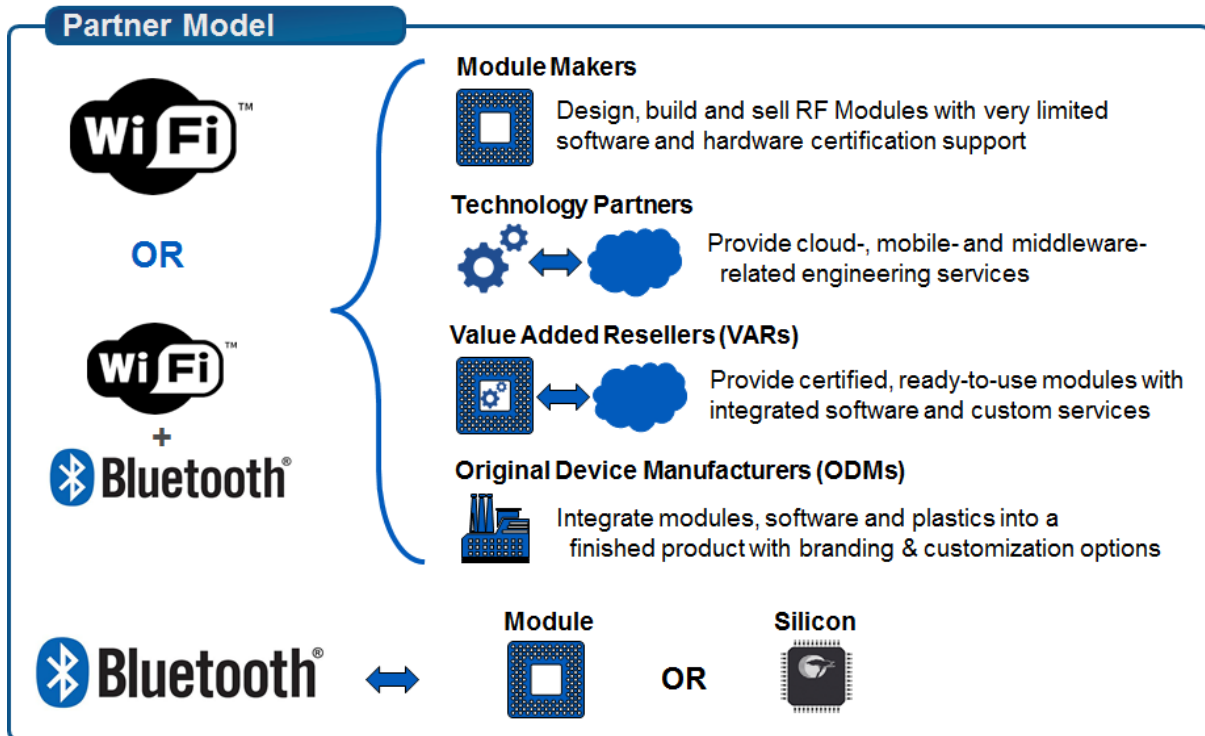

A global partner ecosystem enables you to get the level of support you need for your IoT application




An IoT Selector Guide including partner modules available can be found in the Community at:

<https://community.cypress.com/docs/DOC-3021>

## 1.7 Tour of Development Kits

### 1.7.1 [Cypress CYW920706WCDEVAL](#)

- Monolithic, Single-chip, Bluetooth 5.0 + HS
- ARM Cortex-M3 processor
- Integrated transceiver
- 848 kB ROM, 352 kB SRAM (data and patches), 2 kB NVRAM, 512 kB External Serial Flash
- 1 User Button, 2 User LEDs
- USB JTAG Programmer/Debugger

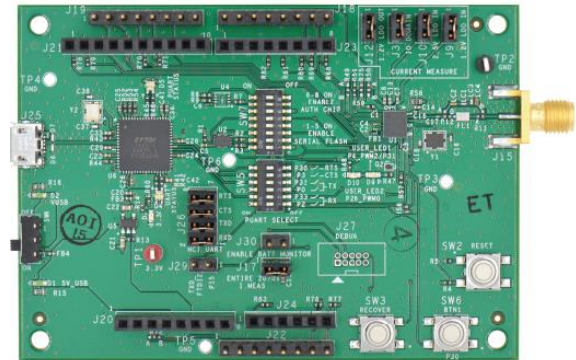

### 1.7.2 [Cypress CYW920719Q40EVB-01](#)

- Bluetooth 5.0 plus 2 Mbps LE from v5
- 96 MHz ARM Cortex-M4
- Integrated transceiver
- 2 MB ROM, 1 MB On-ChipFlash, 512 kB SRAM
- 1 User Button, 2 User LEDs
- USB JTAG Programmer/Debugger





## 1.8 Exercise(s)


### Exercise - 1.1 Create a forum account

1. Go to <https://community.cypress.com/welcome>
2. Click "Log in" from the top right corner of the page and login to your Cypress account. If you do not have an account, you will need to create one first.
3. Once you are logged in, click the "Wireless" icon and then the "BLE and Bluetooth" icon.



4. Click on the "Forums" button.

### GET STARTED

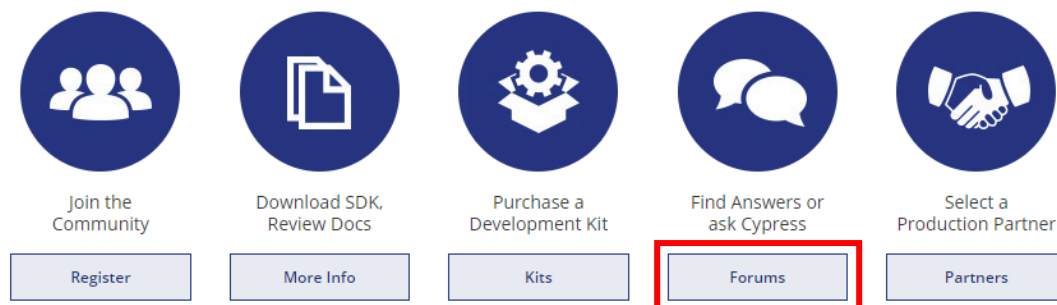

5. Browse the existing forum articles or search for a particular topic that interests you.



### Exercise - 1.2 Open the documentation

1. Open the API.html document from the WICED Studio Project Explorer or using Windows Explorer in the SDK Workspace *doc* directory.

Depending on your browser and security settings, you may need to allow ActiveX controls to get the page to display correctly.

### Exercise - 1.3 Download the Bluetooth Spec Version 5.0

The spec can be found at: [www.bluetooth.org](http://www.bluetooth.org)

Questions to Answer:

What is the organization scheme used in the spec?

On what page does the Attribute protocol specification start?