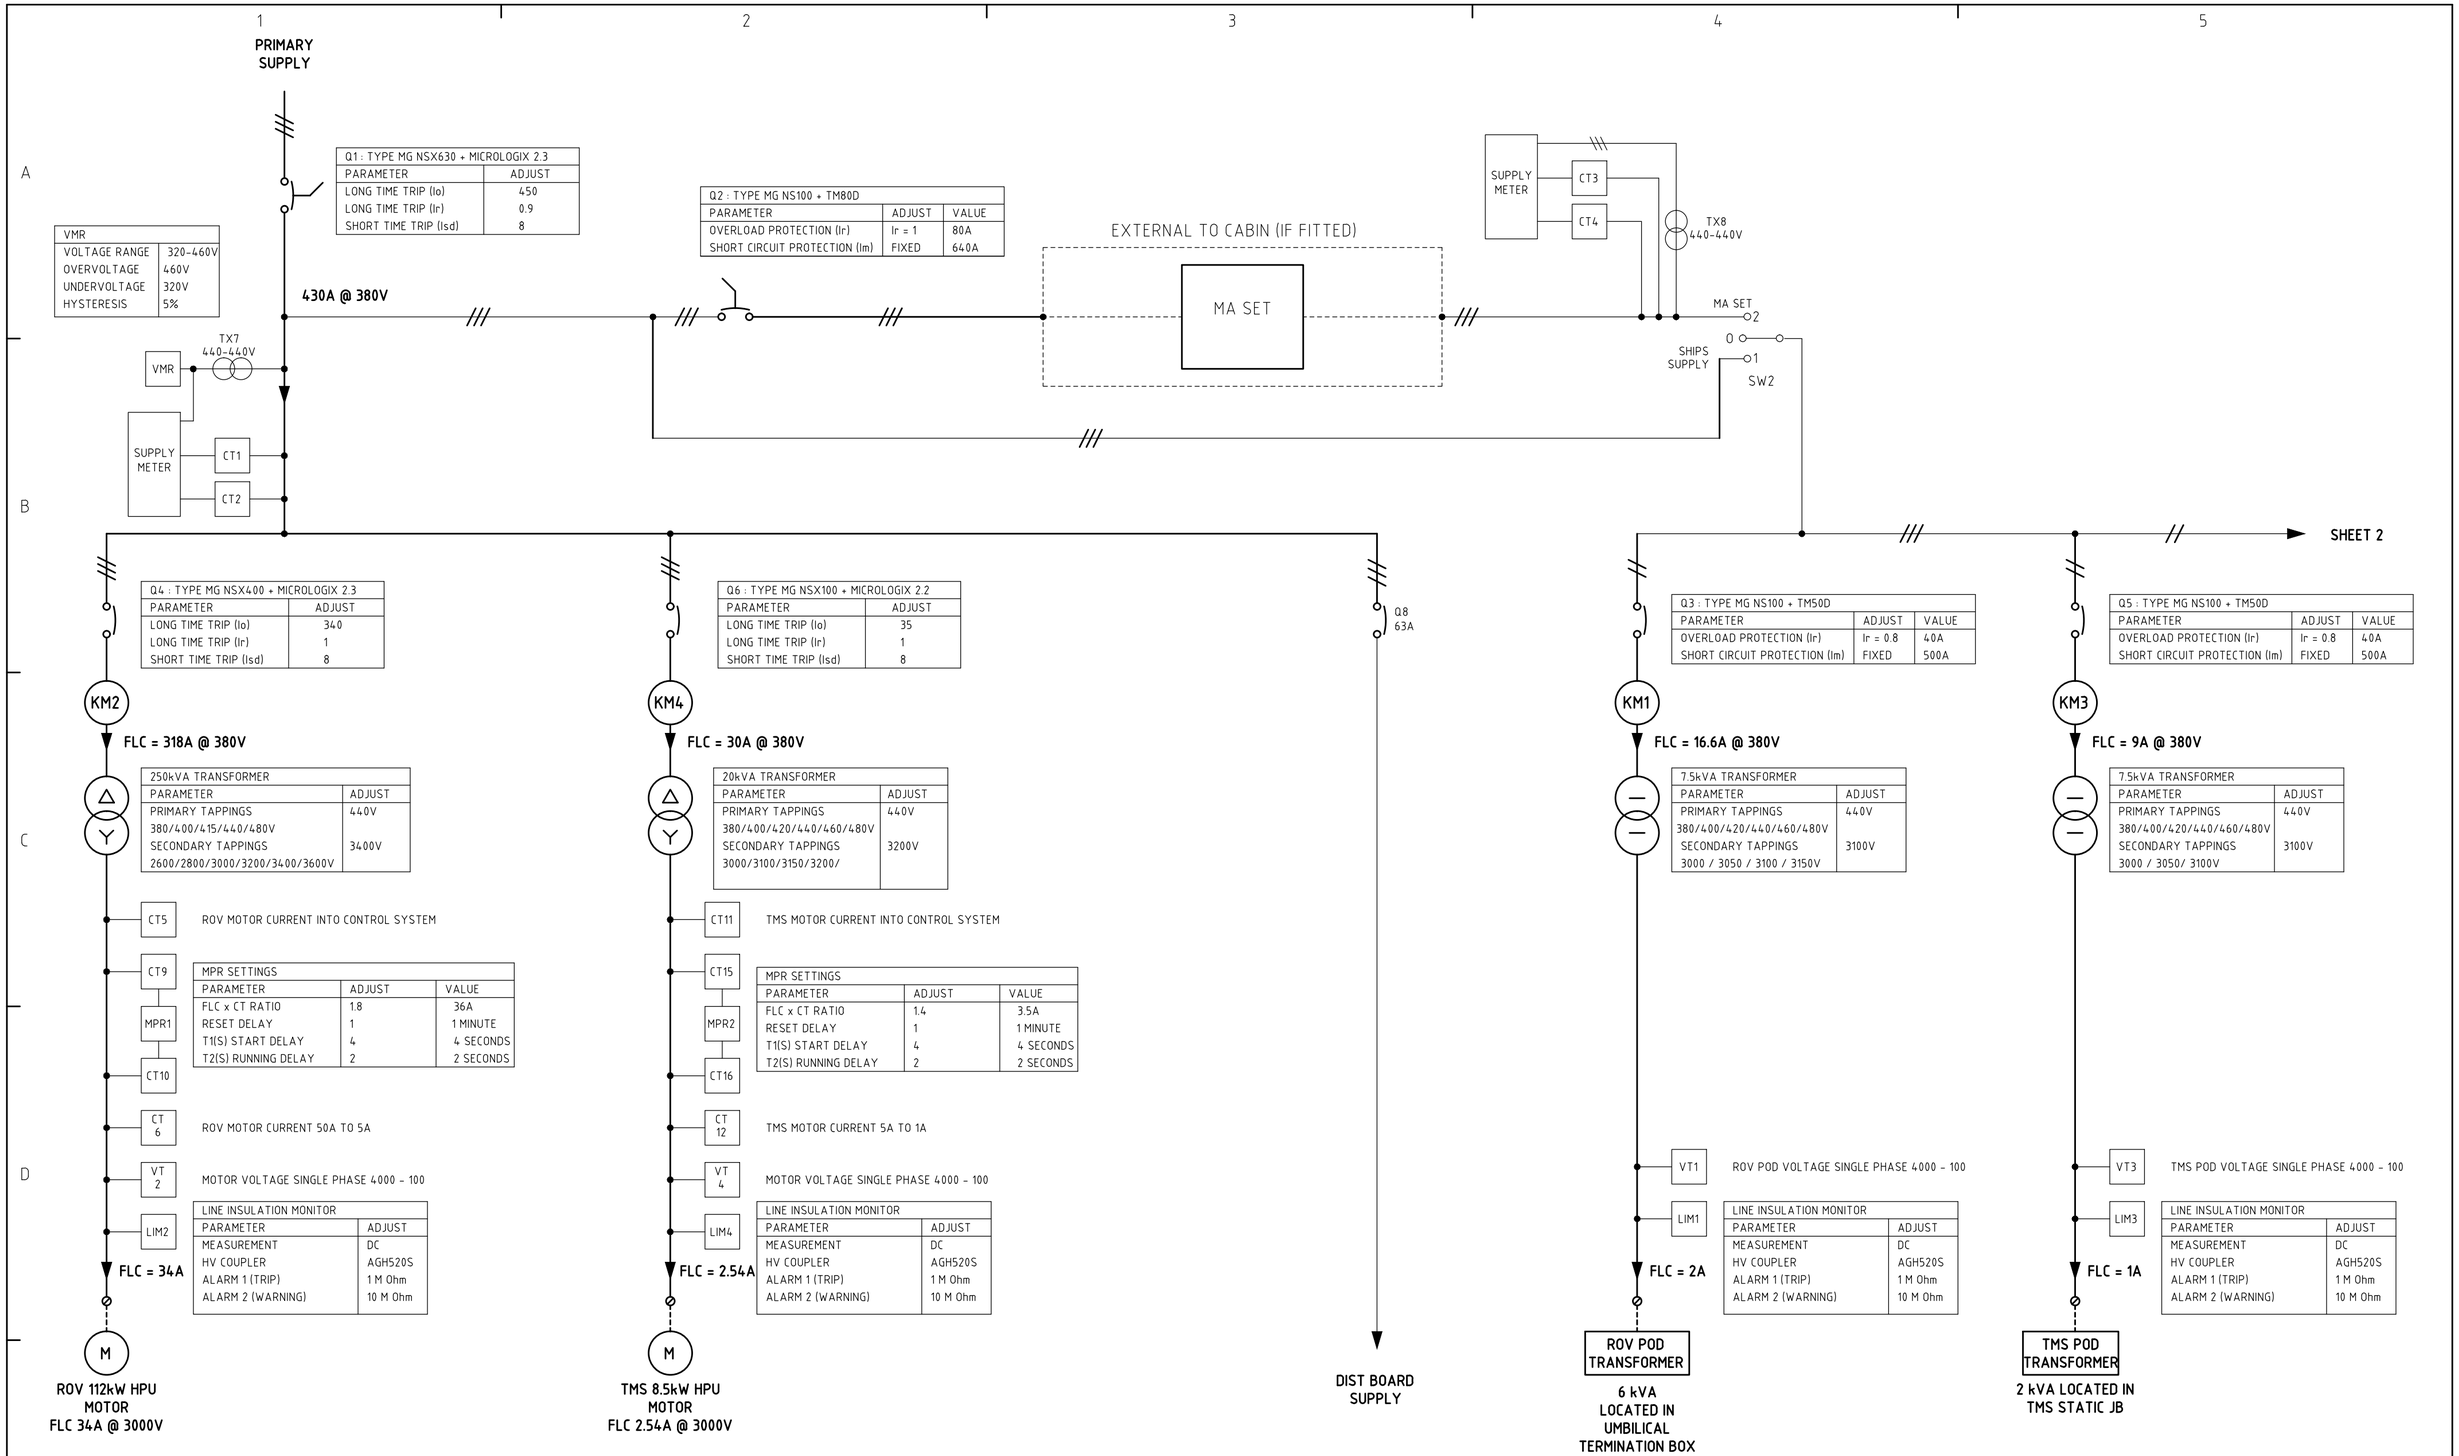

VMR	
VOLTAGE RANGE	320-460V
OVERVOLTAGE	460V
UNDERVOLTAGE	320V
HYSTERESIS	5%

Q1 : TYPE MG NSX630 + MICROLOGIX 2.3	
PARAMETER	ADJUST
LONG TIME TRIP (Io)	450
LONG TIME TRIP (Ir)	0.9
SHORT TIME TRIP (Isd)	8

Q2 : TYPE MG NS100 + TM80D		
PARAMETER	ADJUST	VALUE
OVERLOAD PROTECTION (Ir)	Ir = 1	80A
SHORT CIRCUIT PROTECTION (Im)	FIXED	640A

Q3 : TYPE MG NS100 + TM50D		
PARAMETER	ADJUST	VALUE
OVERLOAD PROTECTION (Ir)	Ir = 0.8	40A
SHORT CIRCUIT PROTECTION (Im)	FIXED	500A

Q5 : TYPE MG NS100 + TM50D		
PARAMETER	ADJUST	VALUE
OVERLOAD PROTECTION (Ir)	Ir = 0.8	40A
SHORT CIRCUIT PROTECTION (Im)	FIXED	500A

Q4 : TYPE MG NSX400 + MICROLOGIX 2.3	
PARAMETER	ADJUST
LONG TIME TRIP (Io)	340
LONG TIME TRIP (Ir)	1
SHORT TIME TRIP (Isd)	8

Q6 : TYPE MG NSX100 + MICROLOGIX 2.2	
PARAMETER	ADJUST
LONG TIME TRIP (Io)	35
LONG TIME TRIP (Ir)	1
SHORT TIME TRIP (Isd)	8

250kVA TRANSFORMER	
PARAMETER	ADJUST
PRIMARY TAPPINGS 380/400/415/440/480V	440V
SECONDARY TAPPINGS 2600/2800/3000/3200/3400/3600V	3400V

20kVA TRANSFORMER	
PARAMETER	ADJUST
PRIMARY TAPPINGS 380/400/420/440/460/480V	440V
SECONDARY TAPPINGS 3000/3100/3150/3200/	3200V

7.5kVA TRANSFORMER	
PARAMETER	ADJUST
PRIMARY TAPPINGS 380/400/420/440/460/480V	440V
SECONDARY TAPPINGS 3000 / 3050 / 3100 / 3150V	3100V

7.5kVA TRANSFORMER	
PARAMETER	ADJUST
PRIMARY TAPPINGS 380/400/420/440/460/480V	440V
SECONDARY TAPPINGS 3000 / 3050/ 3100V	3100V

MPR SETTINGS		
PARAMETER	ADJUST	VALUE
FLC x CT RATIO	1.8	36A
RESET DELAY	1	1 MINUTE
T1(S) START DELAY	4	4 SECONDS
T2(S) RUNNING DELAY	2	2 SECONDS

MPR SETTINGS		
PARAMETER	ADJUST	VALUE
FLC x CT RATIO	1.4	3.5A
RESET DELAY	1	1 MINUTE
T1(S) START DELAY	4	4 SECONDS
T2(S) RUNNING DELAY	2	2 SECONDS

LINE INSULATION MONITOR	
PARAMETER	ADJUST
MEASUREMENT	DC
HV COUPLER	AGH520S
ALARM 1 (TRIP)	1 M Ohm
ALARM 2 (WARNING)	10 M Ohm

LINE INSULATION MONITOR	
PARAMETER	ADJUST
MEASUREMENT	DC
HV COUPLER	AGH520S
ALARM 1 (TRIP)	1 M Ohm
ALARM 2 (WARNING)	10 M Ohm

LINE INSULATION MONITOR	
PARAMETER	ADJUST
MEASUREMENT	DC
HV COUPLER	AGH520S
ALARM 1 (TRIP)	1 M Ohm
ALARM 2 (WARNING)	10 M Ohm

LINE INSULATION MONITOR	
PARAMETER	ADJUST
MEASUREMENT	DC
HV COUPLER	AGH520S
ALARM 1 (TRIP)	1 M Ohm
ALARM 2 (WARNING)	10 M Ohm

REV No	DATE	CHANGE	ZONE	DRAWN	CHECKED	APPROVED

TITLE

DRAWING CABIN SETTINGS

DESIGNED	DRAWN	CHECKED	APPROVED	DATE	DRAWING NO.	REV No.
KS	PC	AT	IMP	21-MAY-13	AH2713 SHEET 1 OF 2	0

ALL INTELLECTUAL PROPERTY RIGHTS SUBSISTING IN THESE DESIGNS ARE THE PROPERTY OF SOIL MACHINE DYNAMICS LTD. NO COPY IS TO BE MADE WITHOUT THE WRITTEN PERMISSION OF SOIL MACHINE DYNAMICS LTD. ANY PATENT APPLICATIONS, PATENTS AND/OR DESIGN APPLICATIONS, REGISTERED DESIGNS, DESIGN RIGHTS OR COPYRIGHT ARISING FROM OR CONTAINED IN THE DESIGNS ARE THE PROPERTY OF SOIL MACHINE DYNAMICS LTD AND ALL INFORMATION MUST BE HELD IN THE STRICTEST CONFIDENCE

SMD Soil Machine Dynamics Ltd

A2

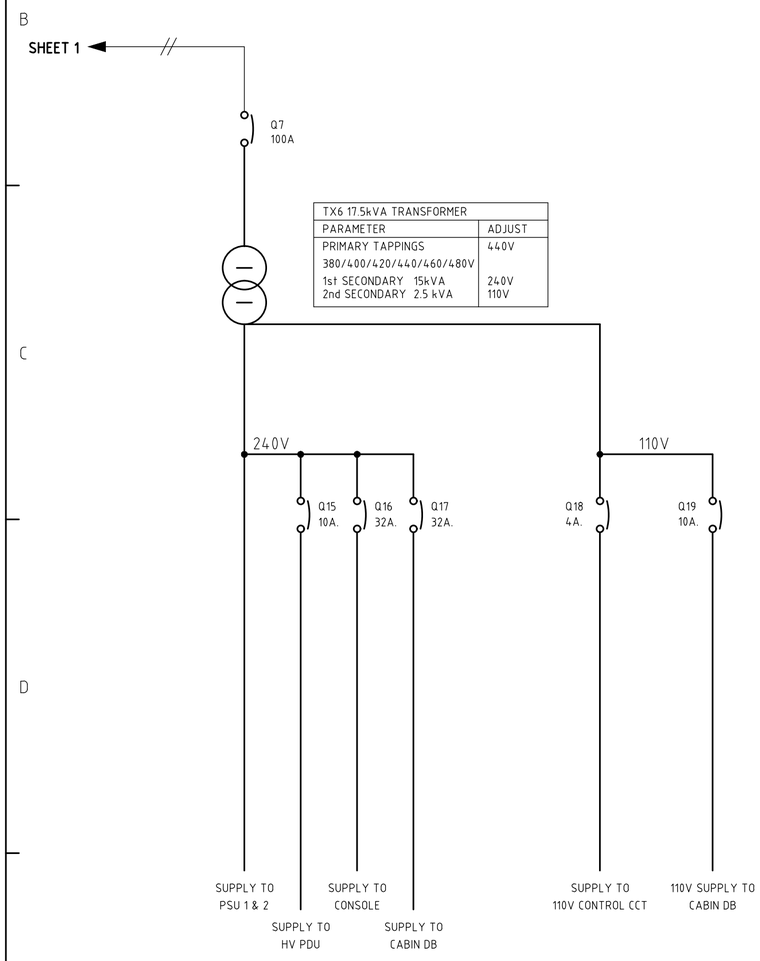

TX6 17.5kVA TRANSFORMER	
PARAMETER	ADJUST
PRIMARY TAPPINGS 380/400/420/440/460/480V	440V
1st SECONDARY 15kVA 2nd SECONDARY 2.5 kVA	240V 110V

TX1 ROV POD TRANSFORMER (7.5KVA)			
UMBILICAL LENGTH	TETHER LENGTH	SECONDARY TAPPING 60Hz	SECONDARY TAPPING 50Hz
3500 - 3000M	500 - 450M	3100 ✳	3000
3500 - 3000M	450 - 100M	3100	3000
3000 - 1500M	500 - 300M	3100	3000
3000 - 1500M	<300M	3100	3000
<1500M	500 - 400M	3100	3000
<1500M	<400M	3100	3000

TX2 ROV MOTOR TRANSFORMER (250KVA)			
UMBILICAL LENGTH	TETHER LENGTH	SECONDARY TAPPING 60Hz	SECONDARY TAPPING 50Hz
3500 - 3000M	500 - 450M	3400 ✳	2800
3500 - 3000M	450 - 100M	3400	2800
3000 - 1500M	500 - 300M	3400	2800
3000 - 1500M	<300M	3200	2600
<1500M	500 - 400M	3400	2800
<1500M	<400M	3200	2600

TX3 TMS POD TRANSFORMER (3KVA)	
UMBILICAL LENGTH	SECONDARY TAPPING
3300 - 1500M	3100
<1500M	3050

TX4 TMS MOTOR TRANSFORMER (20KVA)	
UMBILICAL LENGTH	SECONDARY TAPPING
3300 - 1500M	3200
<1500M	3200

✳ FACTORY DEFAULT SETTING AS DELIVERED WITH FULL LENGTH UMBILICAL.

REV No	DATE	CHANGE	ZONE	DRAWN	CHECKED	APPROVED

TITLE
DRAWING CABIN SETTINGS

DESIGNED	DRAWN	CHECKED	APPROVED	DATE	DRAWING NO.	REV No.
KS	PC	AT	IMP	21-MAY-13	AH2713 SHEET 2 OF 2	0

ALL INTELLECTUAL PROPERTY RIGHTS SUBSISTING IN THESE DESIGNS ARE THE PROPERTY OF SOIL MACHINE DYNAMICS LTD. NO COPY IS TO BE MADE WITHOUT THE WRITTEN PERMISSION OF SOIL MACHINE DYNAMICS LTD. ANY PATENT APPLICATIONS, PATENTS AND/OR DESIGN APPLICATIONS, REGISTERED DESIGNS, DESIGN RIGHTS OR COPYRIGHT ARISING FROM OR CONTAINED IN THE DESIGNS ARE THE PROPERTY OF SOIL MACHINE DYNAMICS LTD AND ALL INFORMATION MUST BE HELD IN THE STRICTEST CONFIDENCE

SMD Soil Machine Dynamics Ltd A2