


| MODEL NO. | OVERALL FRAME WIDTH (A) | CLEAR DOOR OPENING WIDTH (B) | BREAKOUT OPENING (C) | ACTIVE & SIDELITE LEAF WIDTH (D) | ROUGH OPENING WIDTH (E) |
|-------------|----------------------------------|---------------------------------------|----------------------------|---|----------------------------------|
| VMS2FBO-7 | 84" [2133.6] | 35 9/16" [903.3] | 71 5/16" [1811.3] | 41 7/16" [1052.1] | 84 1/2" [2146.3] |
| VMS2FBO-8 | 96" [2438.4] | ① 41 9/16" [1055.7] | 83 5/16" [2116.1] | 47 7/16" [1204.5] | 96 1/2" [2451.1] |
| VMS2FBO-8-6 | 102" [2590.8] | ② 44 9/16" [1131.9] | 89 5/16" [2268.5] | 50 7/16" [1280.7] | 102 1/2" [2603.5] |
| VMS2FBO-9 | 108" [2743.2] | 47 9/16" [1208.1] | 95 5/16" [2420.9] | 53 7/16" [1356.9] | 108 1/2" [2755.9] |
| KEY: | | (A/2)-6 7/16" (A/2)-[163.5] | A-12 11/16" A-[322.3] | (A/2)-9/16" (A/2)-[14.7] | A+1/2" A+[12.7] |

① - MEETS OR EXCEEDS DIMENSIONAL REQUIREMENTS OF NFPA SECTION 18.2.3.6(1) CODE
② - MEETS OR EXCEEDS DIMENSIONAL REQUIREMENTS OF CBC 2007 1008.1.1 CODE

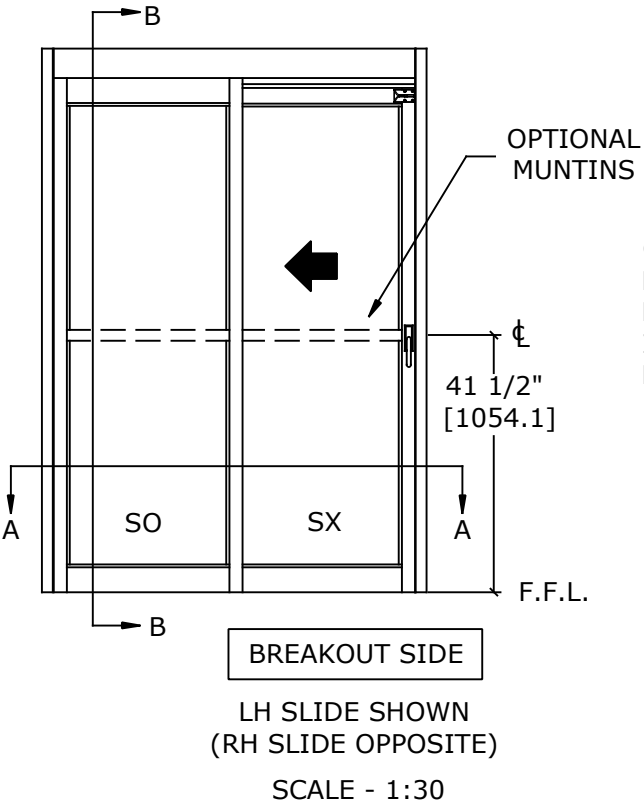

* SEALS: FACTORY APPLIED SEALS USED ON THIS SYSTEM TO SLOW OR RESTRICT PASSAGE OF SMOKE COMPLIES TO ONE OR MORE OF THE FOLLOWING REQUIREMENTS: UL1784, ANSI/NFPA105 2007, UBC7-2, PART11, B5476, UL10B, UL10C, UBC7-2 PART 1 & B5476.



NOTES:

STANDARD PACKAGE CONSISTS OF:

- STANDARD FINISH:
 - CLASS 1, .018MM, CLEAR- AA-M12C22A41
- NARROW STILE RAILS
- 1/4" GLASS STOPS AND BLOCKS
- NURSE ASSIST MAGNETIC CATCHES
- POSITIVE LATCHING
- CONCEALED SWEEPS
- SMOKE RATED SEALS
- FLUSH BOLT-FREE DESIGN


OPTIONS AVAILABLE:

- SPECIAL FINISHES
- PACKAGE WILL ACCEPT UP TO 1 1/4" [31.8] INSULATED GLASS, SEE SHEET AA-13 FOR DETAILS
- 7" & 10" BOTTOM RAILS, SEE SHEET AA-14 FOR DETAILS
- MUNTINS, SEE SHEET AA-14 FOR DETAILS
- SELF-CLOSING, SEE SHEET AA-2 FOR DETAILS
- SEE SHEET OS-1 FOR ALL OTHER OPTIONS.

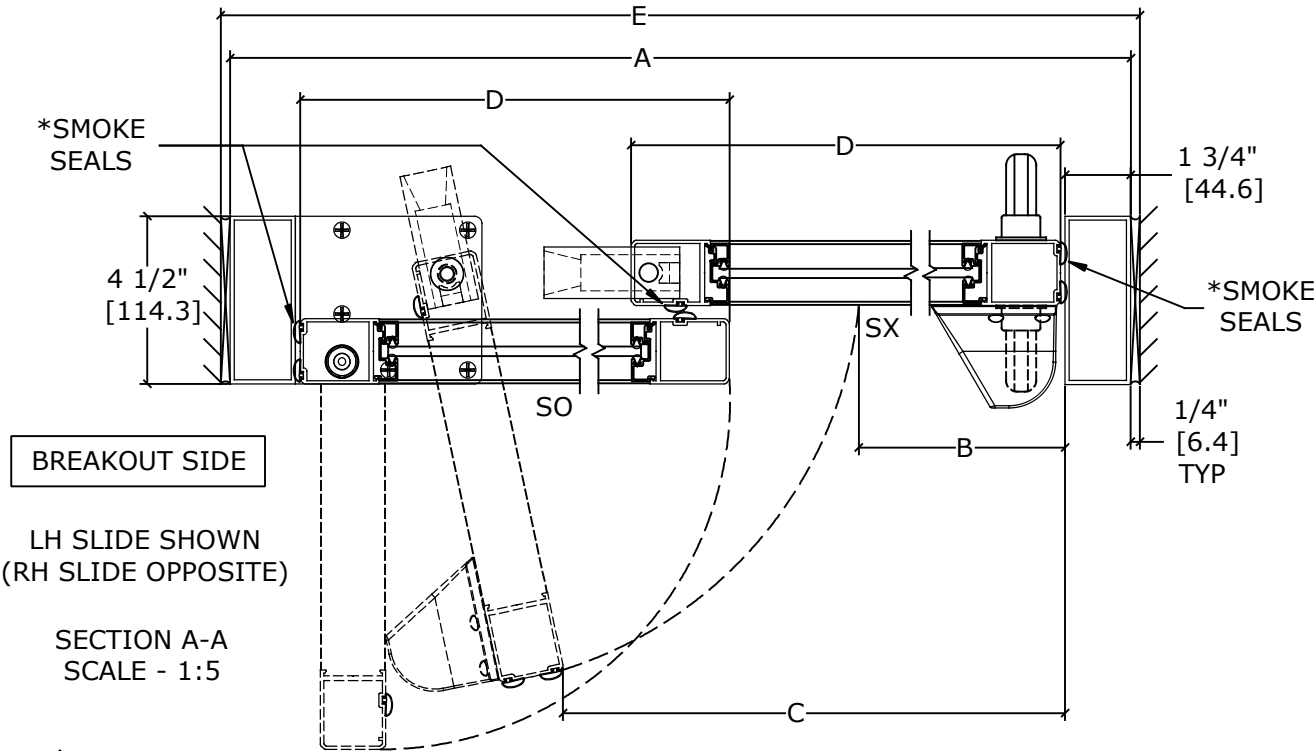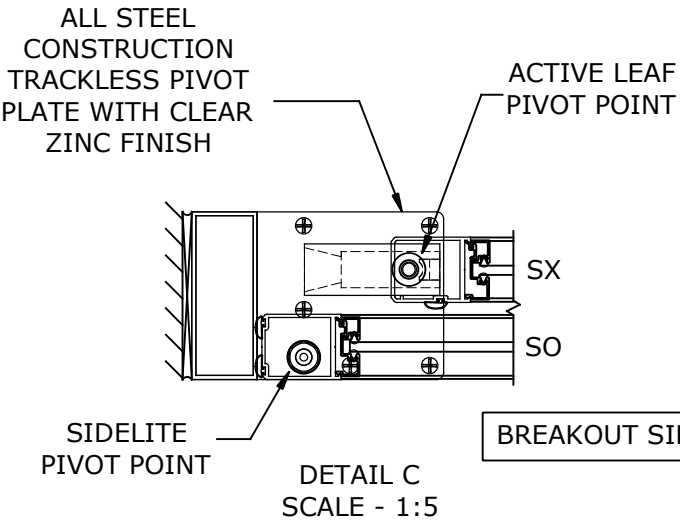

- DOORS WILL ONLY BREAK OUT WHEN IN THE FULLY OPEN POSITION.

REFER TO RELEVANT [LOCAL, STATE, NATIONAL, OR AHJ] BUILDING CODE FOR MIN DOOR HEIGHT & MIN/MAX WIDTH ALLOWABLE FOR EGRESS REQUIREMENT IN CONJUNCTION WITH TABLE.

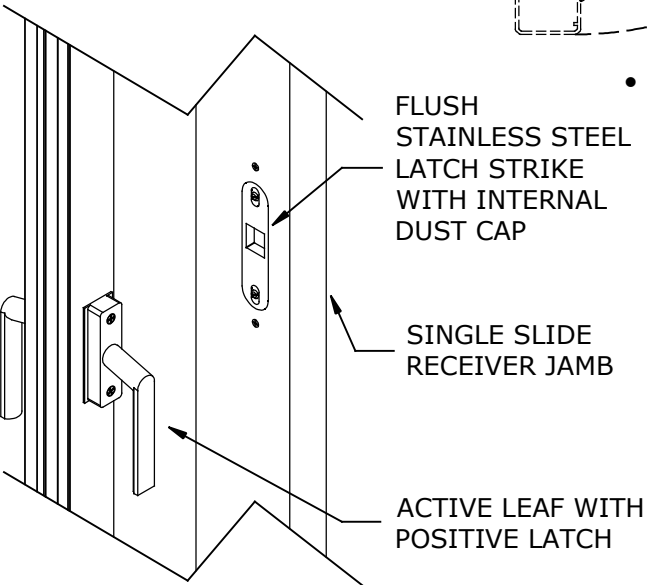

| | | | | | | | | | | | |
|-----------------------|---------|------|----------|--------|-----|------|----------|------|-----|------|----------|
| DWG NO. | 1016198 | | | | | | | | | | |
| DRN BY | DBN | DATE | 02/22/17 | CHK BY | CLW | DATE | 03/03/17 | REV. | 2.0 | DATE | 05/24/17 |
| <div>ASSA ABLOY</div> | | | | | | | | | | | |