
Bits-Back Coding And Variational Inference

Lecture 7 (3 June 2022); lecturer: Robert Bamler more course materials online at https://robamler.github.io/teaching/compress22/

Recap from last lecture: Asymmetric Numeral Systems (ANS)

- stream code that operates as a stack (i.e., "last in first out")
- uses "bits-back" trick (see illustration)



Today: generalize bits-back trick to arbitrary latent variable models

- This will not only generalize the main trick that's used in ANS, it will also use ANS internally.
- We'll also see that an important method from probabilistic machine learning, variational inference, follows directly from the bits-back coding objective. We'll use variational inference in the next lecture to introduce an important class of deep probabilistic models, so-called variational autoencoders.


Spoiler: Main Results (see Problem Set 7)

Today, we'll

- (re-)introduce latent variable models
- think about three differnent ways how we could use latent variable models for data compression, starting from a very simple and naive method and culminating in the so-called bits-back coding algorithm.

On the problem set, you will

- focus on a concrete toy example latent variable model;
- implement of all three compression methods with latent variable models that we'll discuss today;
- compare the performance of these methods, culminating in the plot on the right.



Reminder: Latent Variable Models

Example: Consider the following hypothetical news headlines:


"Parliament Votes on New Labor Bill."

"Labor Union Votes to Extend Strikes."

"Soccer Player Scores First Goal Since Joining New Team."

"Guest Team is Leading by One Goal."

•

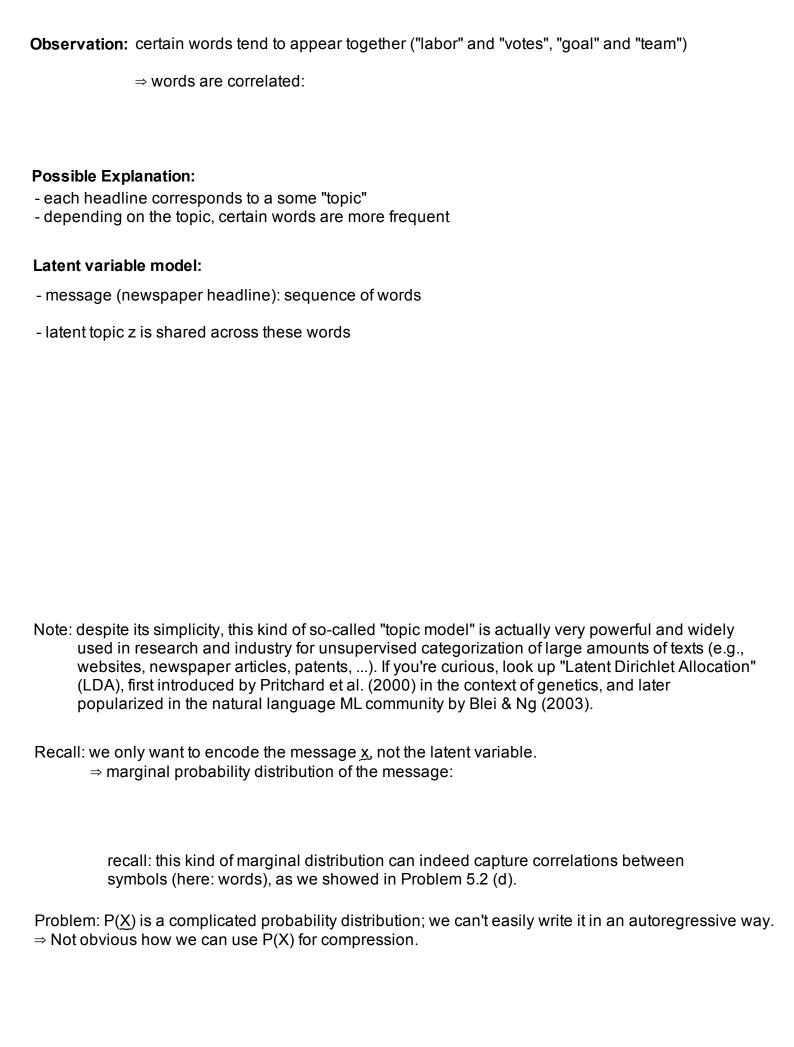


Data Compression With Latent Variable Models

Problem set (strongly recommended! feel free to work in teams):

implement & compare 3 compression methods for latent variable models:

- Problem 7.2: naive method: ignore correlations and treat words as independent



 Problem 7.3: "MAP estimate method": encode some dummy z*, then encode each symbol X; using the likelihood P(X; | Z=z*)

- Problem 7.4: bits-back coding

Thus, the bits-back coding algorithm, which we'll discuss below, has the same (net) bit rate as if we were using the marginal distribution P(X) for compression, even though we won't directly use this marginal distribution.

MAP Estimate Method

Idea: - find some dummy z^* , then encode each symbol X_i using the likelihood $P(X \mid Z=z^*)$; - use some (near) optimal stream code, like range coding or ANS.

Question: which value of z* should we chose

Encoding scheme with MAP-estimate method:

- 1) find z* as described above
- 2) encode z^* using the prior model P(Z) and each symbol x_i using the likelihood model P($X_i \mid Z=z^*$) [if using a range coder, encode z^* first and then the symbols x_i ; if using ANS, encode first the symbols x_i and then z^* so that the decoder can decode z^* first]

Decoding scheme with MAP-estimate method:

- 1) decode z* using the prior model P(Z)
- 2) decode all symbols x using the likelihood model $P(X \mid Z=z^*)$
- 3) throw away z*

Understanding the overhead: recall our news headlines:

Now consider the following hypothetical headline:

"Parliament Votes on Aid for Community Sports Teams."

This uncertainty about the latent variable Z even when we know the message \underline{x} is exactly what is described by the posterior distribution $P(Z \mid \underline{X} = \underline{x})$.


Bits-Back Coding

[Wallace 1990, Hinton & Camp 1993] practical: BB-ANS [Townsend et al. 2019] lossy: [Yang, RB, Mandt, 2020]

Idea: "piggiback" some additional side information into the choice of z*

Typical setup:

- communicate multiple messages (e.g., multiple image pages or multiple frames of a video) over a single channel
- side information = any previously encoded data

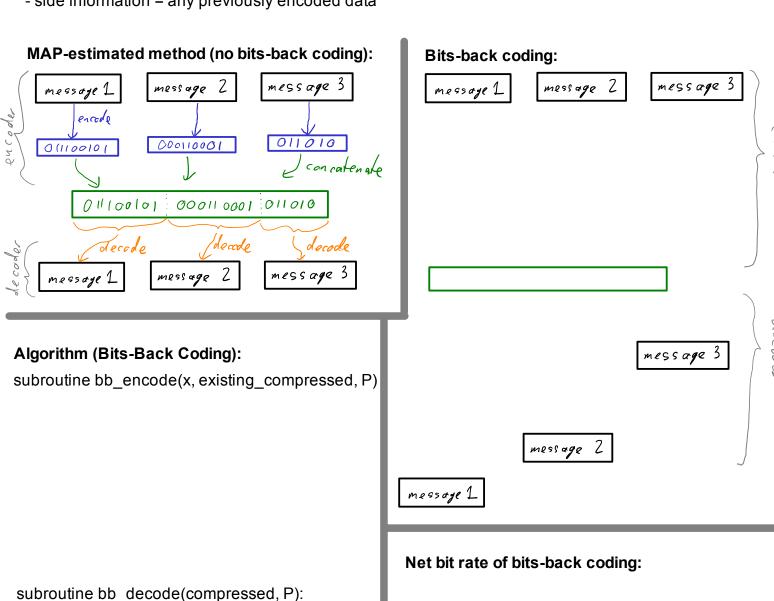

Note: Recall that we already used the bits-back trick inside the ANS algorithm itself (last lecture). There, bits-back coding was a bit simpler because the prior was a uniform distribution and the likelihood was deterministic. Can you identify the steps of the general bits-back algorithm in the special example of ANS?

Hint: the yellow step in the encoder and decoder were not necessary for ANS. Why? How many bits would encoding \underline{x} with the likelihood model $P(\underline{X} \mid Z=z)$ contribute when the likelihood is deterministic?

Variational Inference (Teaser)

- The above derivation that the net bit rate of bits back coding is the optimal bit rate only works if we use the posterior distribution P(Z | X=x) for decoding z in bb encode.
- Since we cannot outperform the optimal bit rate (in expectation), using any other distribution Q(Z) instead of the posterior would lead to a higher bit rate.

_	Problem:	the t	true	nosterior	is usually	hard to	calculate:
	I IUDICIII.	uici	แนษ	DUSICITOR	is usualiv	i ilaiu io	Carculate.

Idea: instead of the true posterior, use some parameterized candidate distribution $Q_{\phi}(Z)$, and minimize expression (K) for the net bit rate over the parameters ϕ (where we replace the posterior in (K) by $Q_{\phi}(Z)$).

- → This method is called "Variational Inference", and it is an important method in modern probabilistic machine learning, far beyond applications for data copmression.
- → In the next lecture, we'll apply (a generalization of) Variational Inference to deep latent variable models (i.e., latent variable models that are parameterized by deep neural networks). This will lead to the popular variational autoencoder (VAE) model architecture.