

NRG - 70

Graphene nanoplatelets (NRG) are high purity, low defect, few nanometers thin platelets of pure carbon. They are produced in several grades and sizes through the proprietary manufacturing process. The unique size and platelet morphology of Nano sheets make them especially effective for electrodes for energy storage. NRG sheets are compatible with almost all polymers making them a suitable active ingredient for inks and coating.

Properties


Appearance	Dark Grey
Purity	> 99%
Carbon	> 93 %
Oxygen	< 7 %
Surface area	70 – 75 m ² /gram
Physical Form	Fine Powder
pH	Neutral
d(A)	3.389
Crystallite Size	93.35 nm
I _D /I _G	0.587
No. of Layers	~20-25 layers (Approx.)
Particle Size D90	2.5 micron

Applications:

- Anode material for Lithium – Ion batteries
- Additives for Lubricants
- Barrier Coatings for anti-corrosion
- Barrier Coatings for packaging


- Chemical and biochemical sensors
- Super capacitors
- Electrically Conductive Inks
- Thermally conductive inks and Coatings
- Heat Spreaders
- Additive for metal – matrix composites
- Thermal Interface Materials

RAMAN SPECTROSCOPY TEST RESULT

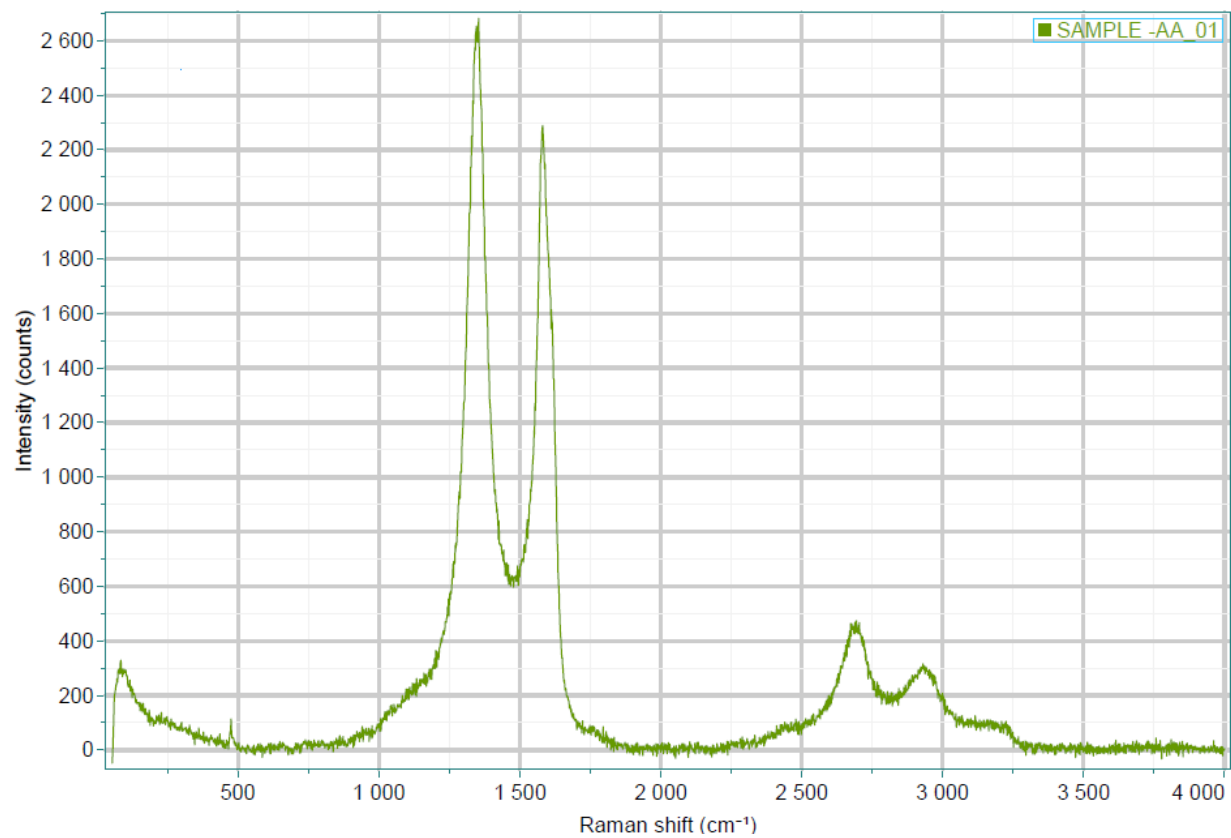

XRD TEST RESULT

ST

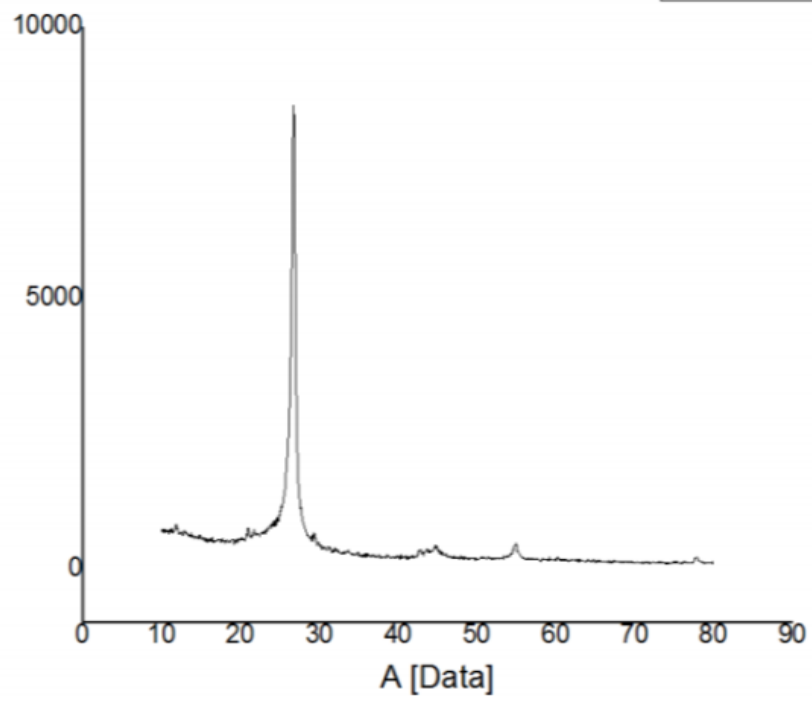

FE-SEM TEST IMAGE

