

Specification

Driver Board

Part number :HC10MST

DATE: 1/03/2016

AUTHOUR	CHECKED	APPROVED

CONTENTS

1.Summarize.....
2.Feature.....
3.Outline Drawing
4.Interface Description.....
5. PCB Sizes.....
6. Attention.....

1. Summarize


HC10MST is a lcds driver board, Support HDM INPUT for raspberry PI, Support resolution 1280X800, It also Can be compatible with multiple resolutions at the same time, can be adjusted according to customer's requirements.

2.Products Feature

Chip	M-star
OSD language	English
Drive-Screen	Interface:TTL/LVDS
	MAX Resolution:1900X1200
Input Format	HDMI
Power Supply	5V
Button Board	Power, up , down, back, input
LED	Green , Red

3.Outline Picture:


LCDS Driver Board Front View

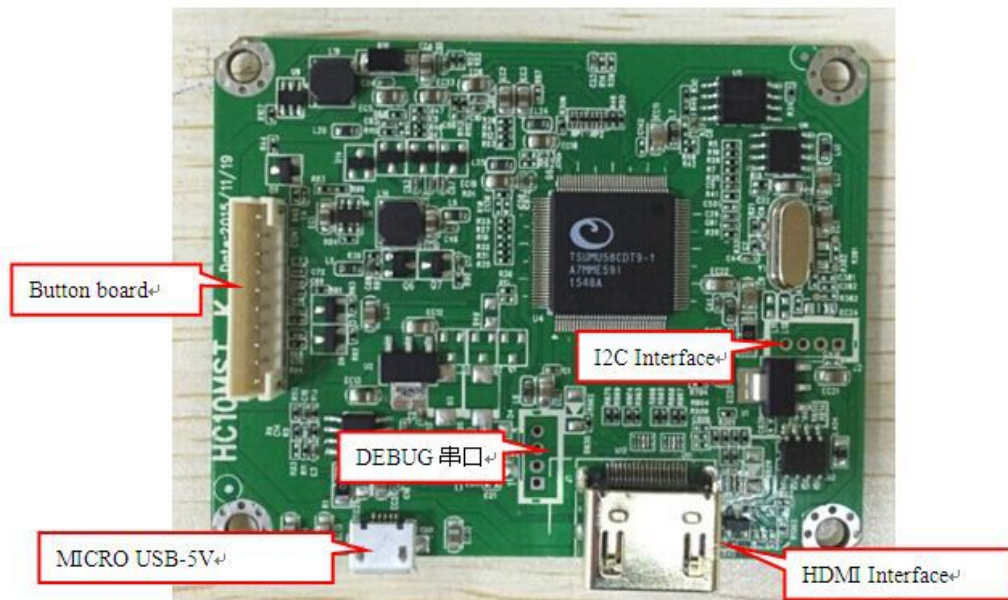

Back View



4.Interface description

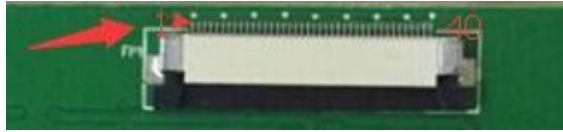

NO.	SYMBOL	Function
1	VCOM	Common Voltage
2	VDD	Power Voltage for digital circuit
3	VDD	Power Voltage for digital circuit
4	NC	No connection
5	NC	No connection
6	NC	No connection
7	GND	Ground
8	RXIN0-	- LVDS differential data input
9	RXIN0+	+ LVDS differential data input
10	GND	Ground
11	RXIN1-	- LVDS differential data input
12	RXIN1+	+ LVDS differential data input
13	GND	Ground
14	RXIN2-	- LVDS differential data input
15	RXIN2+	+ LVDS differential data input
16	GND	Ground
17	RXCLKIN-	- LVDS differential clock input
18	RXCLKIN+	+ LVDS differential clock input
19	GND	Ground
20	RXIN3-	- LVDS differential data input
21	RXIN3+	+ LVDS differential data input
22	GND	Ground
23	NC	No connection
24	NC	No connection
25	GND	Ground
26	NC	No connection
27	LED_PWM	CABC controller signal output for backlight
28	NC	No connection
29	AVDD	Power for Analog Circuit
30	GND	Ground
31	LED-	LED Cathode
32	LED-	LED Cathodev
33	NC	No connection
34	NC	No connection
35	VGL	Gate OFF Voltage
36	NC	No connection

