
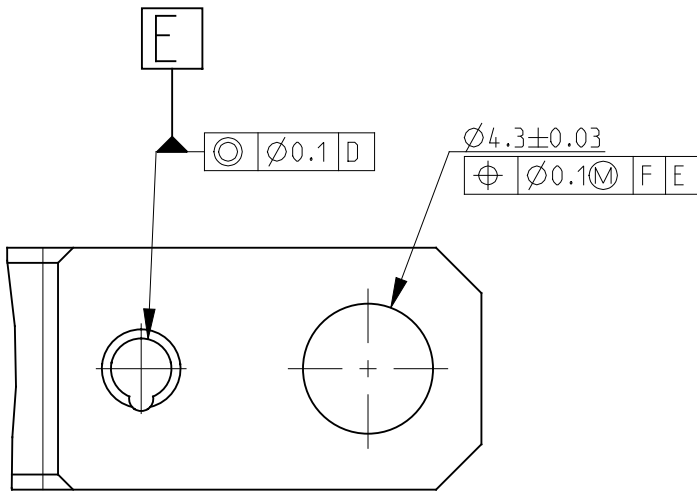


THIS DOCUMENT CONTAINS VALUABLE PROPRIETARY TO RAFAEL. THE RECIPIENTS OF THIS DOCUMENT SHALL NOT DISCLOSE ITS CONTENTS IN WHOLE OR IN PART TO ANY THIRD PARTY UNLESS OTHERWISE AGREED BY RAFAEL.		UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN MILLIMETERS. INTERPRET DRAWING ACCORDING TO RAFAEL PROCEDURE 18.00.10		
REVISIONS				
REV	DESCRIPTION	ECN	ID	DATE
F	BASED ON DRAWING NO. R00-190216. 2 CHAMFERS REMOVED, THREADED POSITION CHANGED FOR SYMMETRY PURPOSE. P.N SUFFIX CHANGED TO 'B'.	ECN74155	BINYAMS	2016-01-26



ח"ג:שלנו
עד:10ש
235X

PRODUCTION ROUTING CHART					OPERDATE	
No.	DESCRIPTION					
10	GENERAL INSTRUCTIONS					
10.1	THIS DRAWING SHALL BE USED WITH ITS MODEL FOR COMPLETE PRODUCT DEFINITION					
10.2	DIMENSIONAL LIMITS APPLY AFTER SURFACE TREATMENT UNLESS OTHERWISE SPECIFIED					
20	MATERIAL					
	DESCRIPTION	CAT.NO.	QTY	UM		
20.1	ALUMINUM ALLOY 6061-T651 PLATE L=144. W=48. T=0.375 INCH COMMERCIAL GEN_1111-1	5010978075	0.15	KG		
30	MACHINING					
30.1	REMOVE BURRS ~0.3, UNLESS OTHERWISE SPECIFIED					
30.2	INNER RADII ~0.3, UNLESS OTHERWISE SPECIFIED					
40	SURFACE TREATMENT					
40.1	CONVERSION COATING FOR IMPROVED CORROSION RESISTANCE PER RAFD0CS-434847(PS- 111.21).					
50	INSPECTION					
50.1	100% VISUAL INSPECTION					
50.2	SAMPLING INSPECTION ACC. TO ZO SQUEGLIA, INDEX VALUE 2.5%					
50.3	100% INSPECTION OF REQUIREMENTS INDICATED BY (*). ACTUAL RESULTS TO BE REPORTED					
60	INSERTS INSTALLATION					
60.1	INSTALL INSERTS ACC. TO DRAWING REQUIREMENTS					
70	FINAL APPROVAL					
70.1	VISUAL INSPECTION & VERIFICATION OF DOCUMENTS					
70.2	SERVICEABILITY TAG					
80	PACKING					
80.1	PACKING SHALL PREVENT CORROSION AND PHYSICAL DAMAGE DURING PROCESS, STORAGE AND SHIPMENT					


TOLERANCES UNLESS OTHERWISE SPECIFIED		CAGE CODE S9285	ID	SIGNATURE	RAFAELCOPYRIGHT PROTECTED 			
THREADS POSITION ⌀ 0.3 A B C		DESIGNED	REVIVOD	DIGITALLY SIGNED DATE: 2016/02/01 RELEASE LEVEL: SEE EDR	TITLE			
HOLES POSITION ⌀ 0.200 A B C		DESIGNED	LIORMI					
SURFACE PROFILE  0.2 A B C		CHECKED	BINYAMS					
HOLES +0.10 -0.03		APPROVED						
SURFACE TEXTURE  Ra1.6		APPROVED	BINYAMS					
SCALE		CLASS			PN		SHT OF	
1:1		UNCLASSIFIED	 		DRAWING NO R00-241734		SEE EDR	1 1
					SIZE A2		REV F	

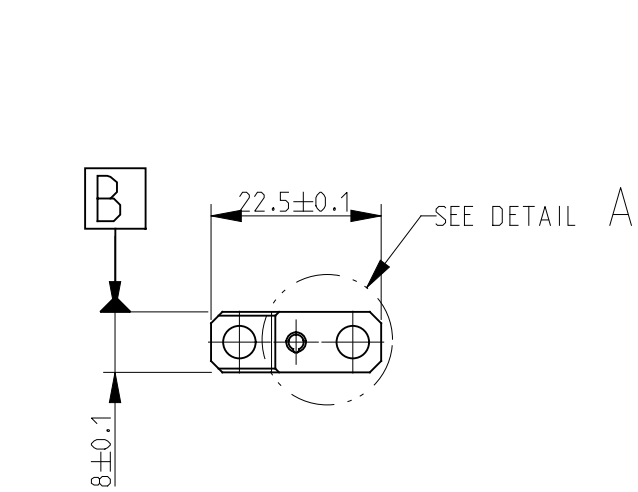

DETAIL A
SCALE 4:1

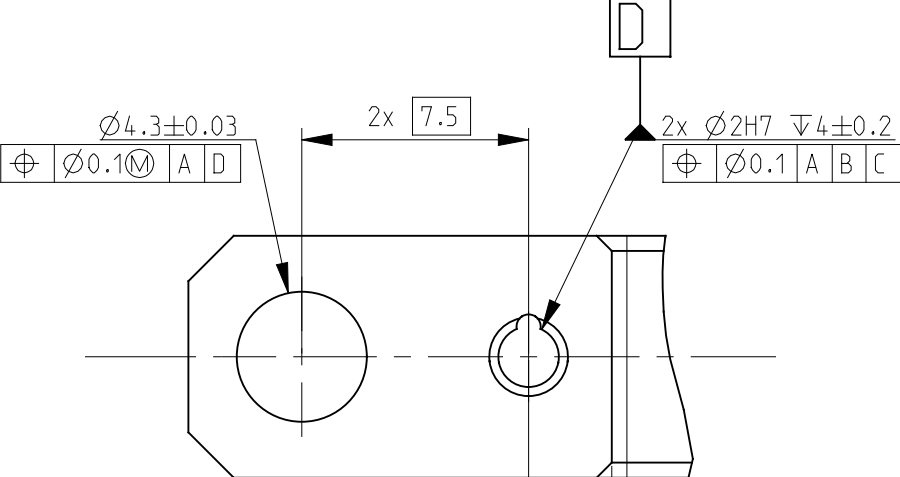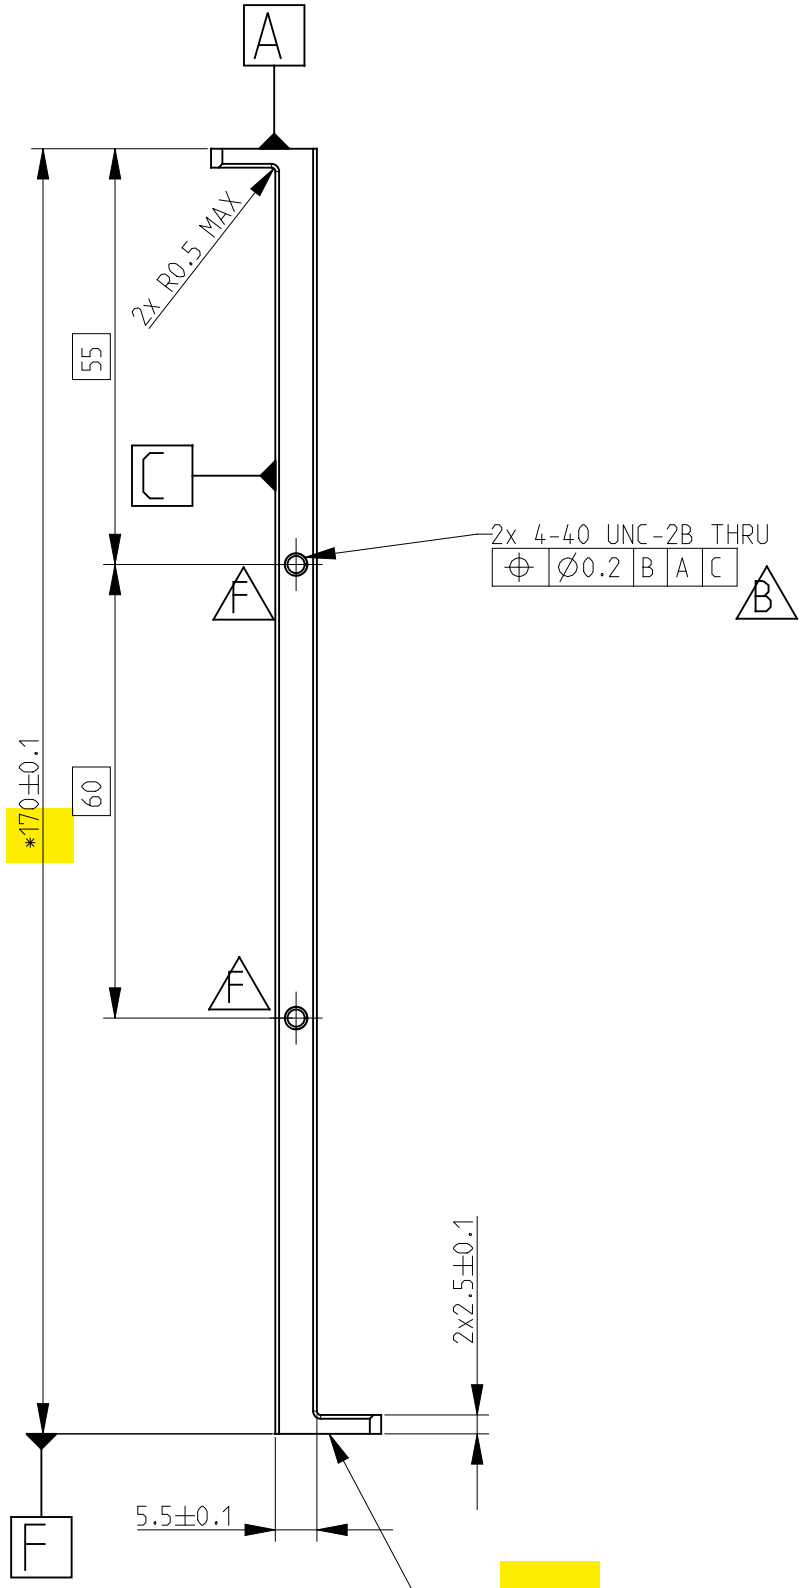

DETAIL B
SCALE 4:1

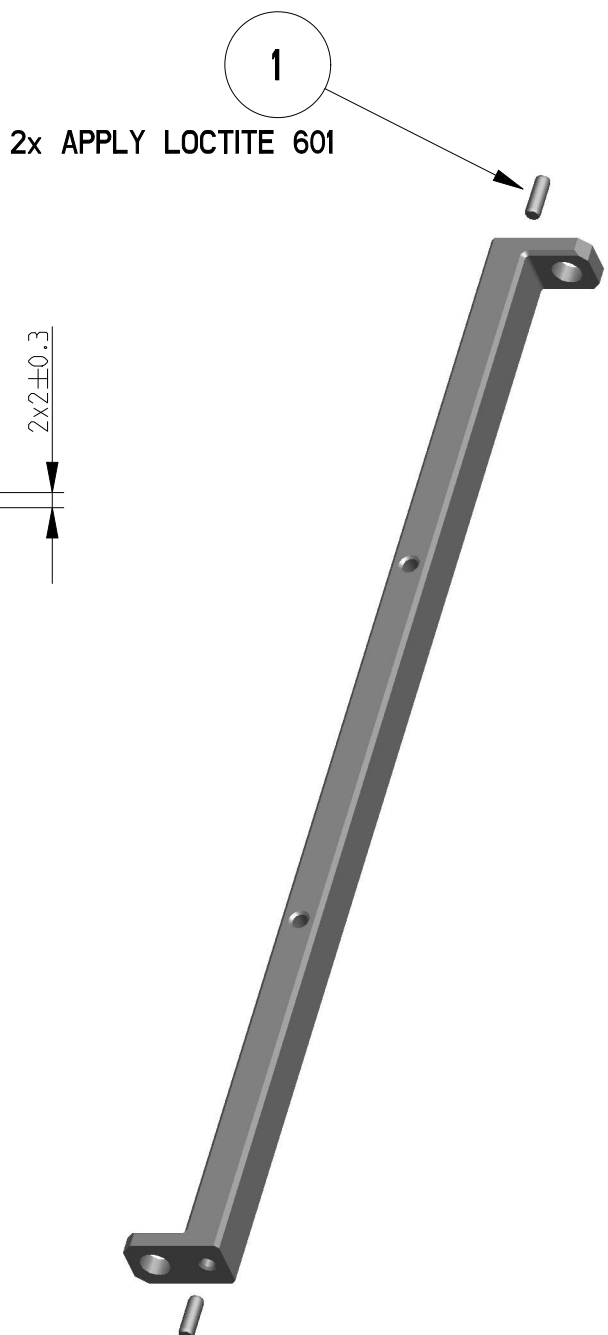

ITEM	DESCRIPTION	CAT NO	QTY	UM
1	PIN ISO 8734- 2.0M6 X 6.0 MM, AISI 420, 52-57HRC OR WST-NR. 14034 OR X46C-13	404770640	2	EA