DESIGN 08 OF 10

TOPO-FLOW

Continuous undulating contours, like wood grain and terrain.

THE DESIGN

The surface is a contour map with four wood-like knots. Ridges follow the contours so the lines flow around the handle like grain in a cut log, giving directional grip that is softer on the hand than sharp knurling.



CLOSE-UP · MID BODY

52.6 g
PLA, SEALED CORE

4
KNOTS

3.13 mm
PEAK RELIEF



THE HANDLE

A sleeve that slides over your paddle's flat handle: a 30.2 × 16.2 mm slot (the measured 30 × 16 mm tongue plus 0.2 mm), closed at the butt with a countersunk 3.5 mm hole so an M3 flat-head screw sits flush. About 1.2 mm of solid wall all round a sealed hollow core keeps it near 50 g. The outer shape is the same on all ten designs, so you can swap textures freely.

132.8 mm	30 × 16 mm	Ø 3.5 mm	100 %
LENGTH	PADDLE SLOT	SCREW HOLE	INFILL

CHOOSE YOUR COLOUR

DESIGNER'S PICK: CITRUS YELLOW




Topo-Flow, all round.


Four views, four surfaces and the idea behind the design. Shown as it prints: one solid PLA colour.



3/4 VIEW · TURN 0°

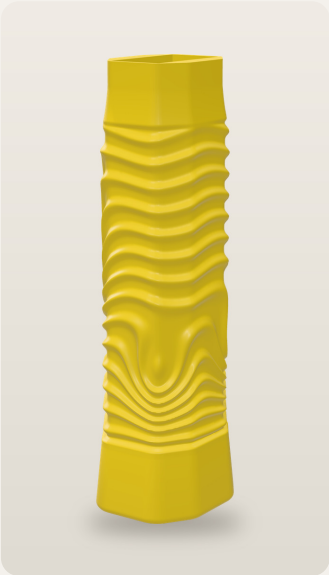

SIDE VIEW · TURN 90°

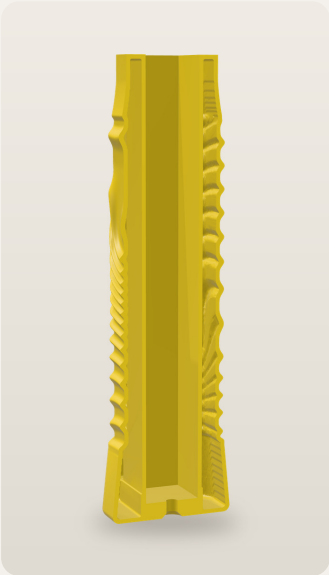

CUTAWAY · HOLLOW CORE




ON A PADDLE · ILLUSTRATION



CLOSE-UP · MID BODY



RIM & SLOT · FROM ABOVE



UNROLLED · LIT RELIEF



BUTT · Ø3.5 HOLE + CSK



DESIGN INSPIRATION

Topographic maps and the growth rings of a sawn log. Nature draws the same flowing lines wherever a surface is shaped gradually, and here they lead your fingers around the handle.


WHY IT GRIPS

- Four knots, contour ridges 2.5–7 mm apart
- Rounded crests about 3.1 mm, valleys 1.66 mm
- Ridge flanks stay under 45°

PRINT TIP

Ridge flanks are rounded and below 45°; the grain is geometry, not colour.

THE WHOLE COLLECTION

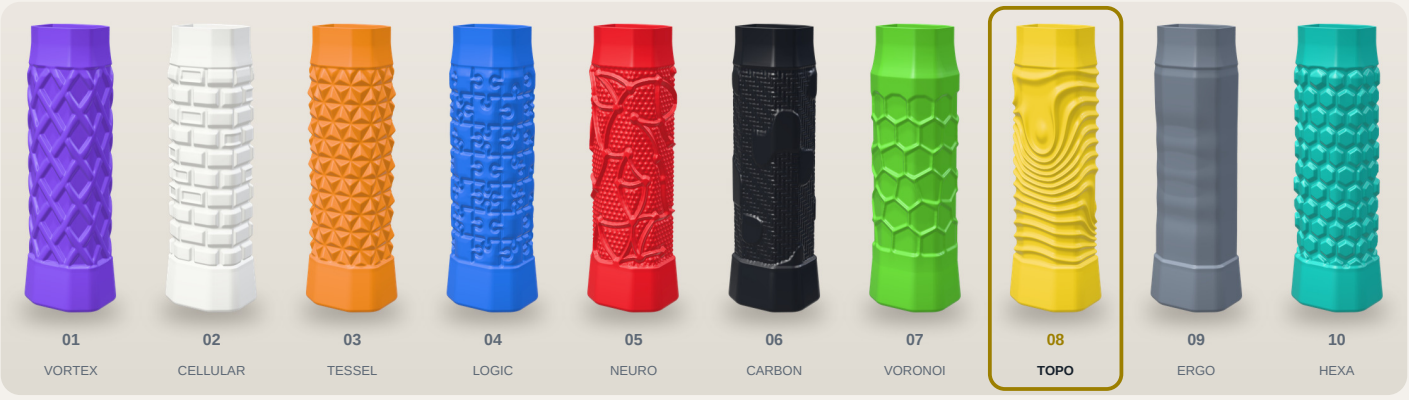

The paddle in the illustration is generic, drawn with your 30 × 16 mm handle. Every design prints in any of the ten PLA colours shown on page 1. 100 % infill · 0.20 mm layers · upright, butt end down.