

02


CELLULAR MOD

Staggered stacked cells; red cells are recessed pockets for swappable inserts.

47.7 g

PLA · 100 % infill · solid

✓ UNDER 50 G IN ALL 4 MATERIALS

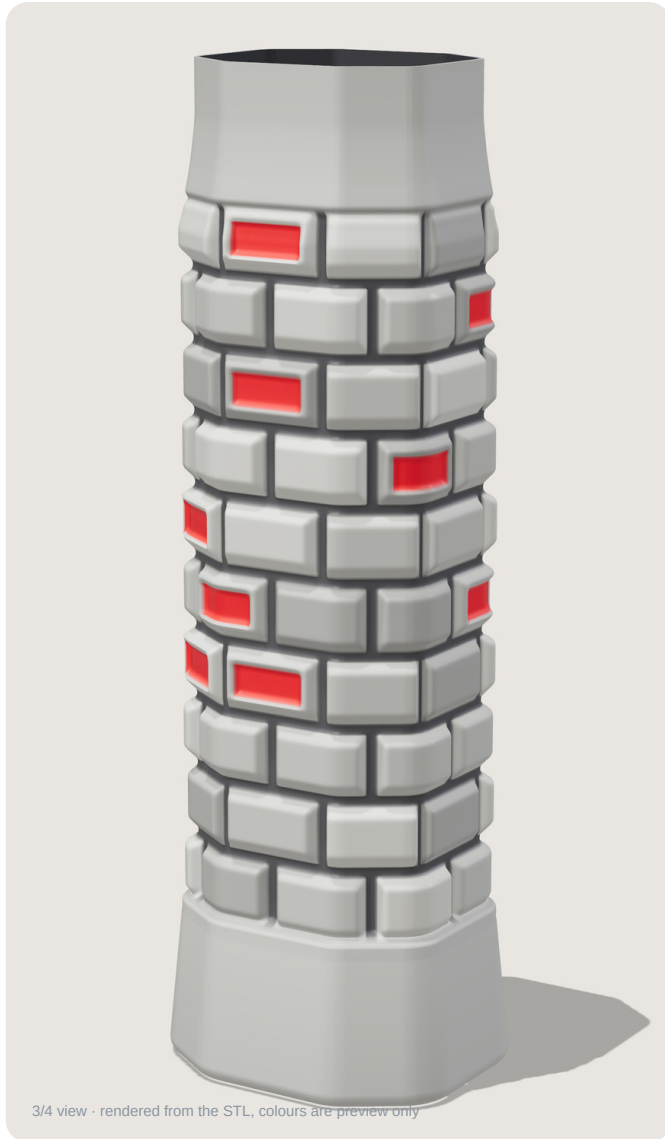

AT A GLANCE

Overall height	132.82 mm
Max footprint (foot)	42.63 × 36.61 mm
Bore	32.06 × 26.04 mm, 127.8 deep
Textured band	z 21.5 – 116.0 mm (94.5 tall)
Outer size in band (max)	38.1 × 31.9 mm
Peak texture height	3.04 mm above bore
Base wall / min rim	1.2 mm / 0.8 mm
Volume / surface area	38.47 cm ³ / 323 cm ²

WEIGHT · 100 % INFILL

PLA	1.24 g/cm ³		47.7 g
PETG	1.27 g/cm ³		48.9 g
TPU	1.21 g/cm ³		46.6 g
ABS	1.04 g/cm ³		40.0 g

50 g limit

COLOURWAY



3MF print palette

PRINT PROFILE

Infill / layer height	100 % / 0.20 mm
Layers	665
Orientation	upright, butt end down
Supports	none required
Filament, 1.75 mm	≈ 16.0 m (100 % flow)

DESIGN INTENT

A wall of staggered, individually pillowed cells. Roughly one cell in five is recessed as an insert pocket (red in the colourway), sized to take a contrasting insert. No insert parts are included.

Cell edges are chamfered; nothing overhangs beyond 45 degrees.

VERIFIED AGAINST THE REFERENCE

Bore vs reference	identical
Outer envelope vs reference	+0.001 mm at most
Rim vs reference	+0.40 mm (deliberate, ≥ 0.8 mm wall)
Bodies / enclosed voids	1 / none
Material under 0.4 mm wide	0.000 % of volume
Longest bridge	none

KEY FEATURES

- 10 rows × 8 staggered cells with 1.4 mm gaps
- Three cell heights give a subtly stepped surface
- About 22% of cells are recessed 0.7 – 1.2 mm as insert pockets

FILES


stl/02_cellular_mod.stl	14.7 MB · 294,052 triangles
3mf/02_cellular_mod.3mf	3.3 MB · colour

✓ FITMENT VERIFIED


✓ SOLID · ONE CLOSED BODY

✓ PRINT-READY · 0.20 MM LAYERS

✓ 3MF VALIDATED

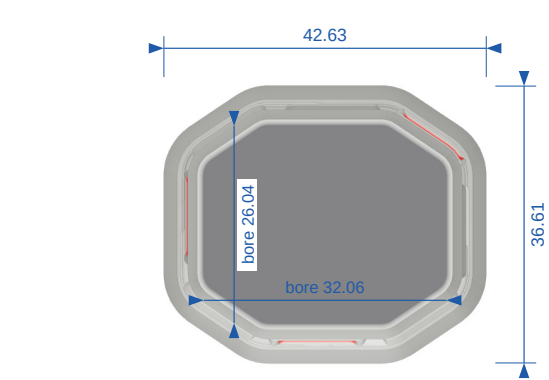


TOP VIEW (from +Z)

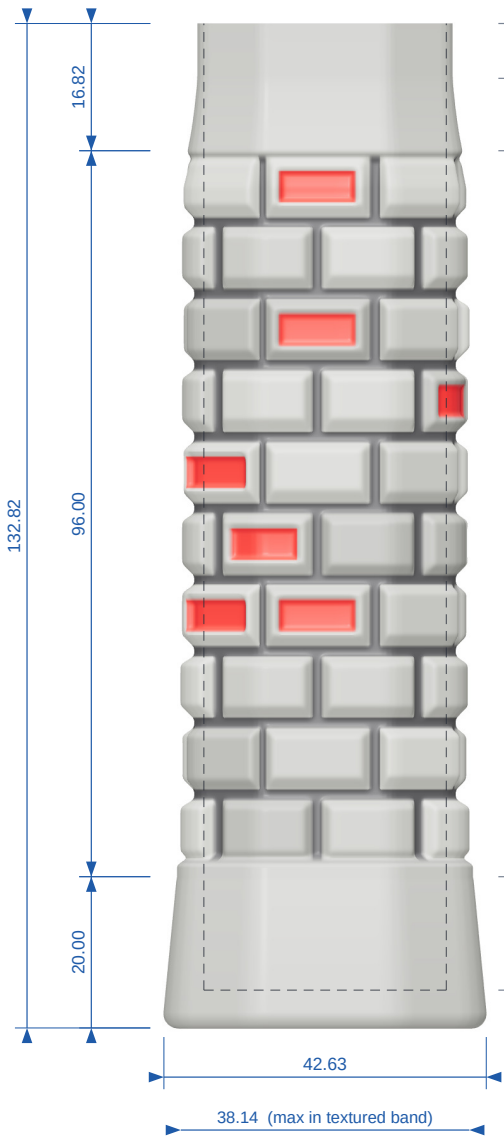

FRONT VIEW (from -Y)

KEY DIMENSIONS	
Overall height	132.82
Overall width × depth (foot)	42.63 × 36.61
Bore width × depth	32.06 × 26.04
Bore depth (floor at z 5.0)	127.82
Outer W × D, textured band (max)	38.14 × 31.89
Foot top (z 20)	39.16 × 33.13
Butt face (z 0)	40.56 × 34.54
Peak texture height above bore	3.04
Base wall / minimum rim wall	1.20 / 0.80

All values in mm. Dashed lines: bore (hidden edges). Renders are the actual STL surface.

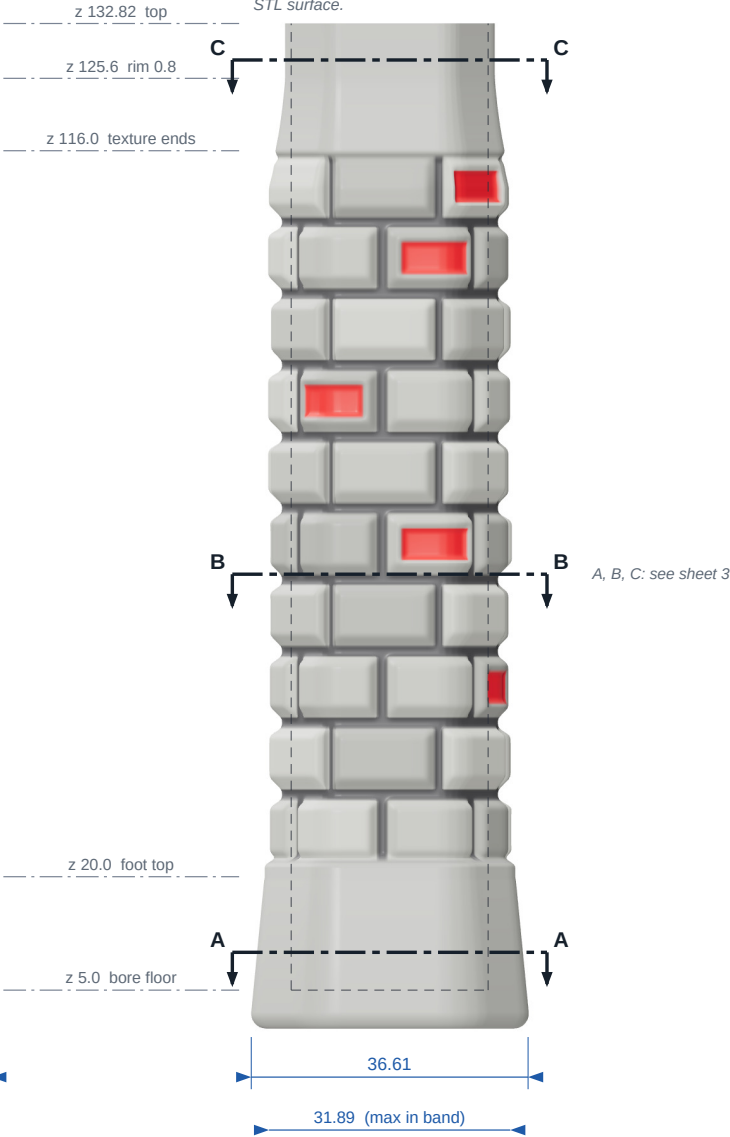

RIGHT VIEW (from +X)



SCALE 1 : 1



PART CELLULAR MOD Pickleball paddle grip sleeve, closed butt, open throat	SCALE 1 : 1	UNITS millimetres	PROJECTION
	MATERIAL PLA / PETG / TPU	INFILL 100 %	LAYER HEIGHT 0.20 mm
GENERAL NOTES 1. Views are true size: print this sheet at 100 %, do not fit to page. 2. Dimensions are measured from the STL, not nominal. 3. Bore, floor and outer envelope match the reference PickleballGrip_1.3mf. 4. Rim is held at a minimum of 0.8 mm (reference tapers to 0.36 mm).	MASS (PLA) 47.7 g	VOLUME 38.47 cm³	SURFACE AREA 323 cm²
	REVISION 2	DATE 2026-09-30	SHEET 2 of 4

Sections & profiles

True-size cross-sections, how the outer surface and material change with height, and the dimension tables.

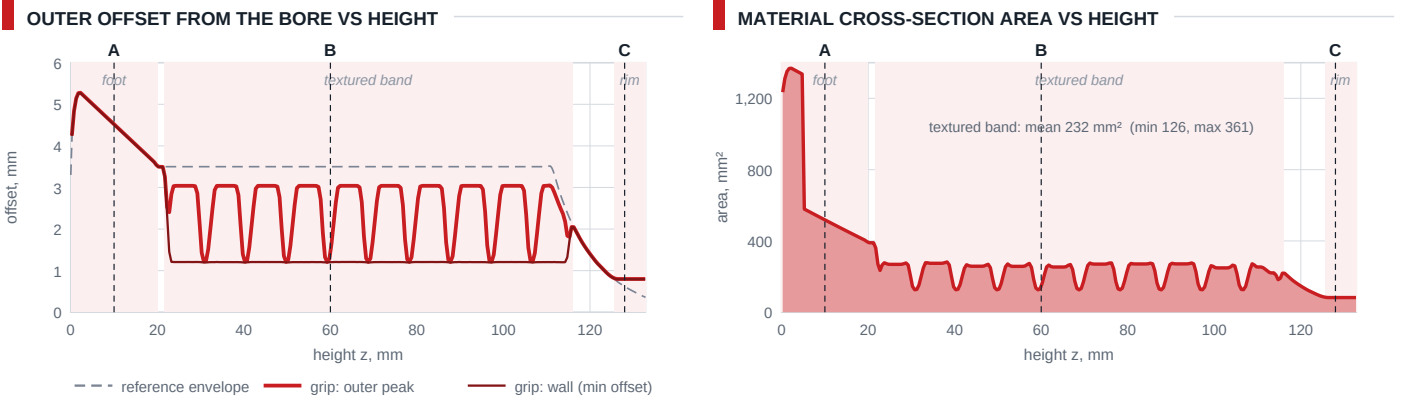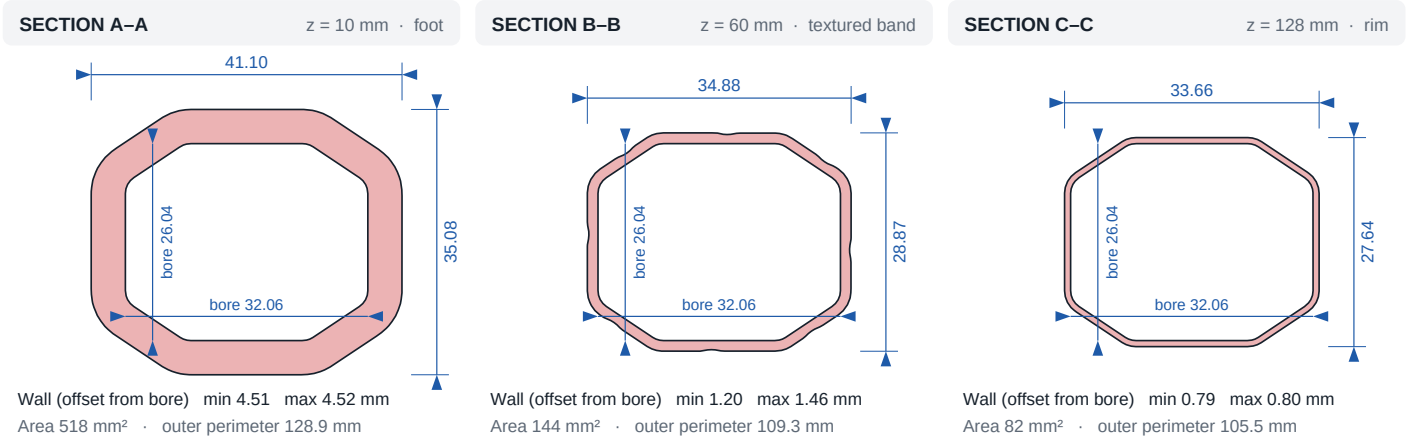

OVERALL & BORE

Overall length (Z)	132.82 mm
Overall width (X)	42.63 mm
Overall depth (Y)	36.61 mm
Bore width × depth	32.06 × 26.04 mm
Bore area / perimeter	751.0 mm² / 100.5 mm
Bore depth (floor at z 5.0)	127.82 mm
Butt face (z 0)	40.56 × 34.54 mm
Outer W × D in band (max)	38.14 × 31.89 mm
Circumference in band	108.1 – 118.4 mm
Volume / surface area	38.47 cm³ / 322.5 cm²

ZONES BY HEIGHT


ZONE	Z FROM	Z TO	HEIGHT
Solid floor (butt)	0.0	5.0	5.0
Flared foot	0.0	20.0	20.0
Smooth collar	20.0	21.5	1.5
Textured band	21.5	116.0	94.5
Smooth neck (taper)	116.0	125.6	9.6
Rim (0.8 mm wall)	125.6	132.82	7.3
Base wall (design / measured min)			1.20 / 1.20 mm
Rim wall (design / measured min)			0.80 / 0.80 mm
Peak texture height above bore			3.04 mm

OUTER DIMENSIONS BY HEIGHT


Z (MM)	OUTER W	OUTER D	PERIMETER	AREA MM²	WALL MIN	PEAK OFFSET
5.0	42.08	36.06	132.0	958	5.00	5.01
10.0	41.10	35.08	128.9	518	4.51	4.52
20.0	39.11	33.09	122.6	393	3.52	3.52
30.0	35.66	29.57	111.5	176	1.20	1.80
45.0	37.91	31.43	117.0	258	1.21	3.04
60.0	34.96	28.95	109.6	148	1.20	1.46
75.0	37.46	31.66	117.7	271	1.21	3.04
90.0	37.54	31.46	117.3	271	1.21	2.91
105.0	36.98	30.96	115.5	237	1.21	2.64
116.0	36.16	30.14	113.4	219	2.04	2.05
125.0	33.77	27.75	105.8	88	0.85	0.85
132.0	33.66	27.64	105.5	82	0.79	0.80

Views & surface


Four-way turntable, close-ups of the surface, and the unrolled height map with the design parameters.

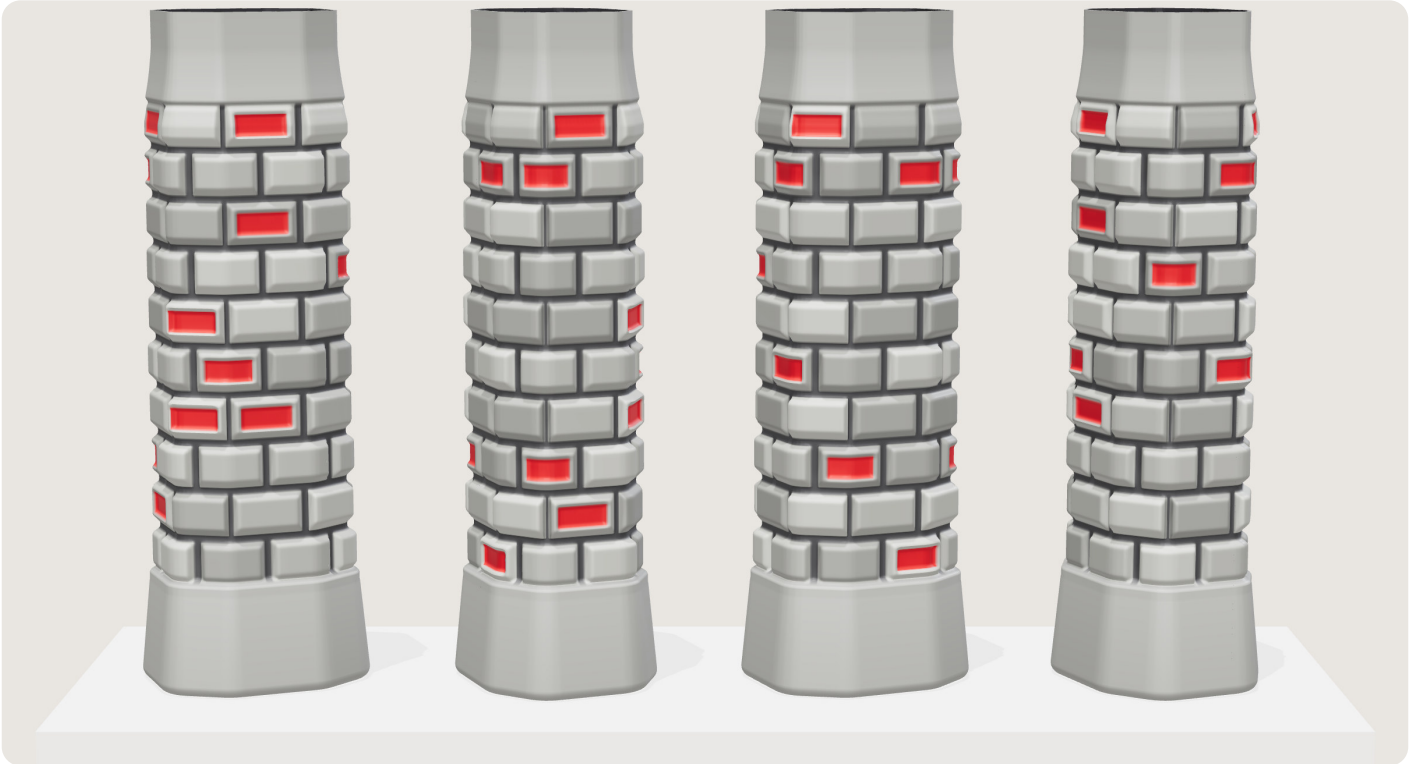

Four views, 90° apart · rendered from the STL, colours are preview only

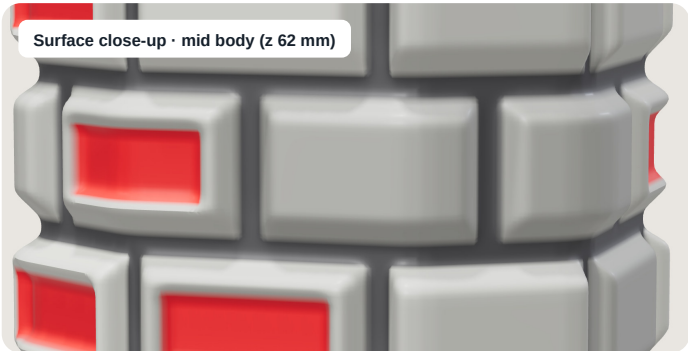

UNROLLED SURFACE · HEIGHT ABOVE BORE

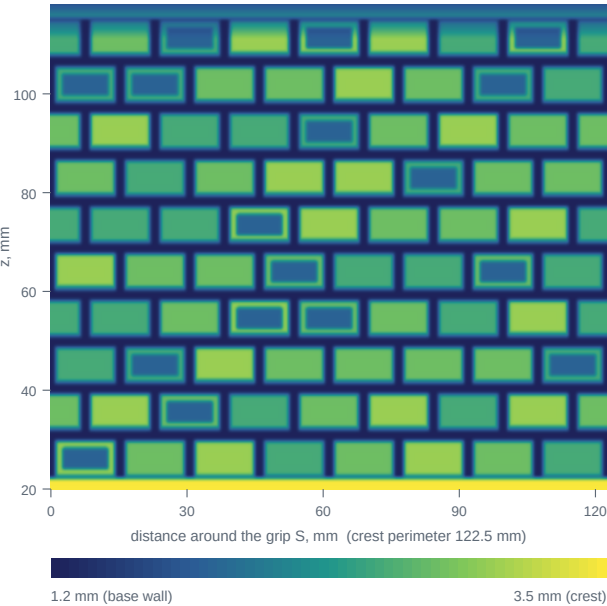

DESIGN PARAMETERS

Rows × cells	10 × 8 (staggered)
Row pitch	9.45 mm
Cell size	15.31 × 8.05 mm
Gap between cells	1.4 mm
Cell heights	2.58 / 2.81 / 3.04 mm
Pocket floor	1.84 mm above bore
Groove floor	1.20 mm (base wall)

PRINT & VERIFICATION

Result: fitment / print-ready	PASS / PASS
Bodies · genus	1 · 0
Bore vs reference	identical
Envelope over reference	+0.001 mm
Material under 0.4 mm wide	0.000 %
Longest bridge	none