

Recent Advances on Non-Line-of-Sight Imaging: Conventional Physical Models, Deep Learning, and New Scenes (Updated 2022–2026)

Ruixu Geng, Yang Hu, and Yan Chen, *Senior Member, IEEE*

Abstract—As an emerging technology that has attracted huge attention, non-line-of-sight (NLOS) imaging can reconstruct hidden objects by analyzing the diffuse reflection on a relay surface, with broad application prospects in the fields of autonomous driving, medical imaging, and defense. Despite the challenges of low signal-to-noise ratio (SNR) and high ill-posedness, NLOS imaging has been developed rapidly in recent years. Most current NLOS imaging technologies use conventional physical models, constructing imaging models through active or passive illumination and using reconstruction algorithms to restore hidden scenes. Moreover, deep learning algorithms for NLOS imaging have also received much attention recently. This paper presents a comprehensive overview of both conventional and deep learning-based NLOS imaging techniques. It is an updated version of our peer-reviewed journal paper published in *APSIPA Transactions on Signal and Information Processing* (2022, vol. 11, pp. 1–48, DOI: 10.1561/116.00000019), extended to cover significant advances from 2022 to 2026; the content added in this update has not undergone peer review. In particular, we highlight the emergence of transformer-based and diffusion-model-based reconstruction networks, the achievement of real-time dynamic NLOS video, the extension of NLOS imaging to non-optical modalities such as radar and ultrasound, and the exploration of new application scenarios including human pose estimation and super-field-of-view imaging. Besides, we survey new proposed NLOS scenes, and discuss the challenges and prospects of existing technologies. Such a survey can help readers have an overview of different types of NLOS imaging, thus expediting the development of seeing around corners. A curated list of 150+ NLOS papers and an interactive project homepage are available at https://github.com/ruixv/NLOS_Overview and https://ruixv.github.io/NLOS_Overview/.

Index Terms—Non-line-of-sight (NLOS), deep learning, active NLOS imaging, passive NLOS imaging, transformer, dynamic NLOS, radar NLOS, acoustic NLOS, neural implicit surface, diffusion model, real-time reconstruction.

This document is an **updated version** of the peer-reviewed journal paper “Recent Advances on Non-Line-of-Sight Imaging: Conventional Physical Models, Deep Learning, and New Scenes,” published in *APSIPA Transactions on Signal and Information Processing*, vol. 11, no. 1, pp. 1–48, 2022 (DOI: 10.1561/116.00000019; also available at arXiv:2104.13807). The original article covers foundational works through 2021 and has undergone formal peer review. This update extends coverage to include significant advances from 2022 to 2026. **The content added in this updated version has not undergone peer review.** A curated list of 150+ NLOS papers and an interactive project homepage are maintained at https://github.com/ruixv/NLOS_Overview and https://ruixv.github.io/NLOS_Overview/.

R. Geng is with the Department of Electrical and Computer Engineering, The University of Hong Kong, Hong Kong SAR, China (e-mail: ray-geng@hku.hk).

Y. Hu is with the Department of Electronic Engineering and Information Science, University of Science and Technology of China, Hefei 230000, China (e-mail: eeyhu@ustc.edu.cn).

Y. Chen is with the School of Cyberspace Security, University of Science and Technology of China, Hefei 230000, China (e-mail: eecyan@ustc.edu.cn).

I. INTRODUCTION

With the rapid development of photon-sensitive sensors and imaging algorithms, optical imaging capabilities have been greatly improved in recent years. Within the line of sight, high-quality imaging can be achieved at a relatively long distance. However, due to the inherent physical constraint of visible light, traditional optical imaging is difficult to see objects outside the line of sight. To break that restriction, non-line-of-sight(NLOS) imaging analyzes the diffuse reflection from a relay wall to image hidden objects, which has broad applications in many fields, such as medical imaging, autonomous driving, and robotic vision [1], [2].

According to whether a controllable light source is used, NLOS imaging can be divided into active imaging and passive imaging. Active NLOS imaging often uses expensive external light sources with high temporal resolution(e.g., ultrafast laser) to illuminate the diffuse relay surface. Simultaneously, a sensitive time-resolved detector is used to detect the light reflected on the relay surface, hidden objects, and relay surface in sequence. The collected effective light is often referred as the three-bounce light since it is reflected by three surfaces (relay surface, hidden objects, and relay surface) in succession. Then, the collected three-bounce light is analyzed by different algorithms(e.g., backprojection [3], [4], inverse methods [5] and wave-based methods [6], [7]) to reconstruct the hidden scene. Since the active methods can collect different kinds of information, including intensity, time, and coherence, the active methods can perform a high-resolution 3D reconstruction. On the other hand, passive methods do not use a controllable external light source but use ambient light or light emitted by hidden objects to complete NLOS imaging. Despite the low cost, passive methods usually can only collect intensity [8] or limited coherence information [9], [10] and usually complete low-quality 2D reconstruction or localization, while a few recent works can estimate hidden scene position or depth with partial occluders [8], [11].

Four typical NLOS imaging setups are shown in Figure 1, and there are many challenges when realizing the NLOS imaging. First, due to the high-order loss with distance and environmental noise during the light transport process, NLOS imaging is an ill-posed problem with low SNR, making high-quality reconstruction extremely difficult [12]. Different hidden scenes may produce the same measurement, which deepens the ill-posedness of the problem [13]. Second, the spatial resolution of the reconstruction result is limited by

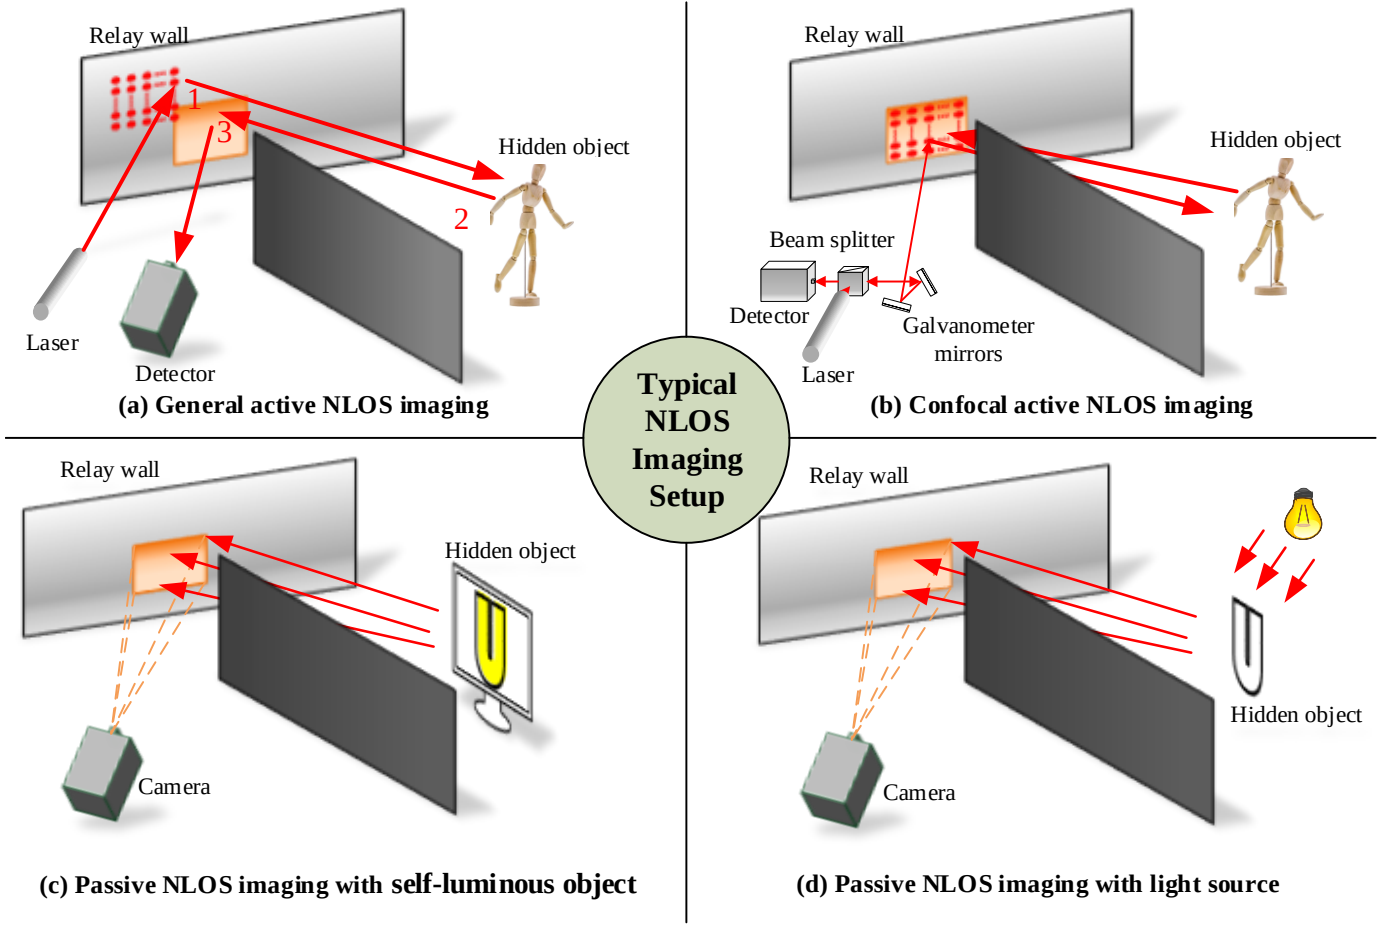


Fig. 1. Four typical NLOS imaging setups

the size of the scanning area (aperture size) and the system's temporal resolution. When the size of the hidden scene is large or complex, the spatial resolution will be limited by the computational complexity [1]. Third, the data collection time is too long [14]. Typical time-resolved NLOS imaging needs a scanning process to obtain data, making it difficult to reconstruct in real-time with high quality. Although array detectors (e.g., SPAD array) are promising to eliminate the scanning process [15], they have not yet been fully explored.

Despite the difficulties, many emerging innovative methods have achieved NLOS imaging under certain scenarios in recent years. Figure 2 summarizes recent NLOS imaging research. It can be seen that the conventional methods based on physical imaging models, are still the mainstream of research in recent years. Conventional methods rely on imaging setup and illumination (e.g., active or passive), which are committed to developing three factors in NLOS imaging: advanced hardware systems, accurate forward imaging models and effective reconstruction algorithms. For example, [16] deployed confocal settings and dual-telescope to complete an amazing 1.43km NLOS imaging. Liu et al. exploited the phasor field to convert NLOS imaging model to LOS imaging model [2], [6], thus achieving high-quality reconstruction of complex scenes. [1] subtly converted NLOS reconstruction into a three-dimensional deconvolution problem. All these works have

greatly promoted the development of NLOS imaging.

Besides conventional methods, the application of deep learning in NLOS imaging has also been rapidly developed. According to network design principles, the deep learning methods used in NLOS imaging are divided into end-to-end networks [17] and physics-based networks [18], [19]. Compared with conventional algorithms, deep learning algorithms can thoroughly learn the scene prior, automatically extract features, and complete the reconstruction of hidden objects. Although NLOS imaging based on deep learning is still at the early stage, it has broad research prospects for practical applications. Moreover, some new types of NLOS scenes, such as “imaging behind occluders” [20] that used two reflections behind obstacles and keyhole imaging [21], have also been proposed, enriching the applications of NLOS imaging. This article aims to make a detailed review of the various types of NLOS imaging research mentioned above, including conventional active and passive methods, deep learning-based NLOS imaging, and new NLOS scenarios. The corresponding challenges and opportunities will also be discussed. We hope this article can help readers have a systematic understanding of existing NLOS imaging research.

Compared to the existing surveys [22], [23], this article is much more comprehensive with the coverage of different NLOS imaging scenes, deep learning algorithms, and new

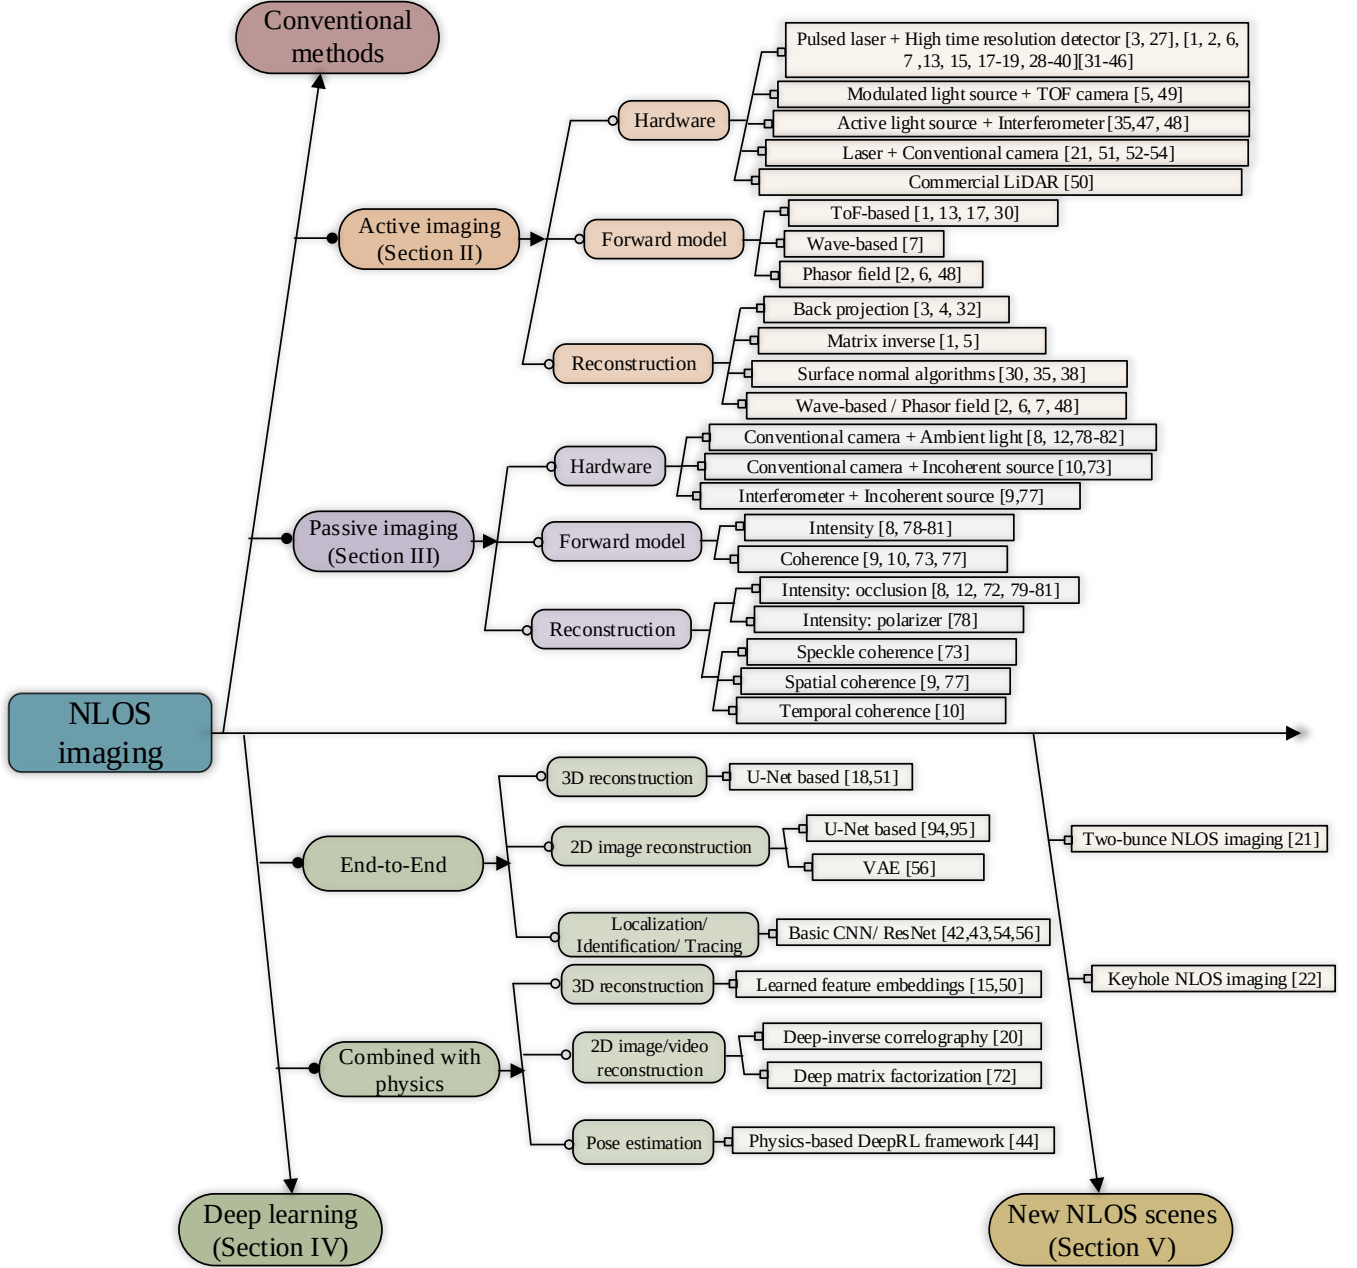


Fig. 2. An overview of NLOS imaging.

NLOS imaging scenarios. As an emerging technology that has developed rapidly in recent years, the algorithms and applicable scenarios of NLOS imaging are constantly growing. Survey [22] summarized the research of NLOS imaging in detail by classifying existing methods based on ToF information, coherent information, and intensity information. However, it completes the review from the perspective of the information used, and has less introduction to imaging models, reconstruction algorithms, and recent deep learning methods. Besides, in [22], the passive imaging problem was only a subset of different exploited information and thus not described in detail. Another review [23] provided and summarized the key

technologies of laser-based active NLOS imaging, which however lacked the description of passive NLOS imaging, deep learning methods and new NLOS scenes. On the contrary, this article summarizes the latest active and passive NLOS imaging research based on physical methods and provides a detailed summary and analysis of the latest deep learning algorithms, including the advantages, types, challenges, and prospects. Besides, this article also summarizes several new types of NLOS imaging scenarios. Notice that such summarization can help readers have an overall understanding of NLOS imaging, which however cannot be found in the existing surveys [22], [23].

The remainder of this article is organized as follows. In Section II, we first introduce the existing work of active NLOS imaging from three aspects: the hardware, forward propagation model, and reconstruction algorithms. We also discuss the challenges and prospects of active NLOS imaging. Then, in Section III, the related work, including the hardware, forward model, and reconstruction algorithms, as well as the challenges and prospects of passive NLOS methods, are summarized respectively. In Section IV, we review the deep learning algorithms that have emerged in recent years from their motivations, network structures, loss functions, corresponding challenges, and prospects. The new NLOS imaging scenarios are discussed in Section V and conclusions are drawn finally in Section VI. Figure 2 clearly illustrates the relationship between the structure of this article and the current development of NLOS imaging technologies. It should be noted that imaging through a scattering medium [24], [25] does not belong to the NLOS imaging scope in this article.

Update (2022–2026). Since the original version of this survey (published in 2021), NLOS imaging has undergone rapid and dramatic advances across all fronts. On the hardware side, novel detector designs such as gradient-gated SPAD arrays [26] and superconducting nanowire single-photon detectors (SNSPDs) operating at infrared wavelengths [27] have extended the capability of time-resolved systems. On the algorithmic side, the introduction of transformer-based architectures [28], [29], state-space models [30], graph neural networks [31], and diffusion model priors [32] has significantly advanced the reconstruction quality and real-time performance of NLOS systems. Real-time NLOS video at 4 fps for room-sized dynamic scenes has been demonstrated [33], marking a landmark towards practical deployment. Beyond the classical optical setting, NLOS imaging has been extended to mmWave radar [34] and ultrasound [35], opening new application domains. New NLOS scenes have also emerged, including human pose estimation [36] and polarization-based scanning-free single-pixel imaging [37]. This updated survey incorporates these advances and provides an up-to-date reference for researchers in the field.

II. ACTIVE METHODS

Active NLOS imaging employs a controllable light source (usually a narrow-band laser) and a detector to obtain reflected information, which is then used to reconstruct hidden scenes. This section introduces recent advances of active NLOS imaging from three parts: hardware devices, physical light transport models, and reconstruction algorithms. Besides, the challenges and prospects of active NLOS imaging are analyzed at the end of the section. Table I summarizes active imaging systems, where each row of the table lists the light source, sensor, information, and task for different NLOS imaging techniques.

A. Hardware Devices in Active Methods

A variety of detectors, from professional interferometers [46] and single-photon counters [39], [79] to ordinary cameras and even cell-phone cameras, have been used in NLOS imaging. Different detectors need to be combined with

corresponding illumination sources to complete specific NLOS tasks. Here, we introduce such combinations to describe what hardware is used in active NLOS imaging.

1) Pulsed laser and high temporal resolution detector: NLOS imaging was first proposed in a time-resolved imaging work by Raskar and Davis [80], first theoretically evolved by Kirmani et al. [81] and experimentally demonstrated by Velten et al. [3]. All of these works [3], [80], [81] were in the context of active time-resolved transient imaging, also called “light-in-flight imaging” or “freezing light in motion” [23].

Transient imaging uses an ultrafast pulsed laser as the light source and a high time-resolved detector as the camera to measure the time of the photon arrival event in each pulse period, and then obtain the time distribution of photon events through the accumulation of multiple pulse periods, which then is converted to transient images. Considering that transient imaging is based on pulsed lasers and high-time-resolved detectors, the combination of pulsed laser and high-time-resolved detector is one kind of hardware used in active NLOS imaging.

Streak cameras When NLOS imaging was first experimentally achieved by Velten et al. [3], the time-resolved detector was a streak camera with extremely high temporal resolution. As an important optical time characteristic measurement detector, streak camera has been widely used in the experimental research of ultrafast physical processes such as laser fusion and high energy density physics [82]. When the ultrafast light signal passes through the slit of the streak camera, the photoelectric conversion is completed. These photoelectrons are accelerated and focused under the high-voltage electric field’s action and enter the scanning system. Within the linear range of the voltage, the vertical distance between the photoelectron’s position and the original movement direction is proportional to the time of which the photoelectron enters the scanning plate, hence completing the conversion of time information to space information. Finally, using the function between the optical signal’s spatial information and the scanning speed of the streak camera, the temporal information of the optical signal is obtained, which can be reconstructed to get transient images.

The temporal resolution of the streak camera is remarkably high. In [3], the theoretical resolution could reach 2ps (limited by a finite temporal-point spread function of the camera, the effective temporal resolution was 15ps), and the most advanced streak camera at present can reach a temporal resolution of 200 ~ 300 fs. However, streak cameras are too expensive (typically more than 70,000£), limiting the practical application of NLOS imaging. Therefore, later works attempt to use an inexpensive time-resolved detector to complete active NLOS imaging.

SPAD (Single Photon Avalanche Diode) In 2015, Buttafava et al. [39] demonstrated that SPAD (Single Photon Avalanche Diode) is feasible for NLOS imaging. In Geiger mode, a single photon may trigger an avalanche of about 10^8 carriers, which can be used as a single photon counter and get pretty accurate photon timing. The current commercial SPAD covers the wavelength range from 300nm to 1700nm. Among them,

TABLE I
ACTIVE NLOS IMAGING

Reference	Illumination	Sensor	Information	Task
[3], [38]	Pulsed laser	Streak camera	Time of flight	3D reconstruction
[1], [2], [6], [7], [14], [16]–[18], [39]–[59]	Pulsed laser	SPAD	Time of flight	3D reconstruction
[12], [60]	Pulsed laser	SPAD	Integrated photon counts and occlusion	2D reflectivity reconstruction
[61](long range), [62], [63](single point)	Pulsed laser	SPAD	Time of flight	Detection/ Tracking/ Identification
[64]	Pulsed laser	SPAD	Time of flight	Pose estimation
[15], [65]	Pulsed laser	SPAD array	Time of flight	3D reconstruction
[66]	Pulsed laser	SPAD array	Time of flight	Detection/ Tracking/ Identification
[46], [67], [68]	Pulsed laser	Interferometer	Coherence	3D reconstruction
[5], [69], [70]	Modulated laser	ToF camera	Time of flight	3D reconstruction
[71]	Integrated	LiDAR	Depth and intensity	3D reconstruction
[20], [72]	Continuous laser	Conventional camera	Intensity	3D reconstruction
[73]–[75]	Continuous laser	Conventional camera	Intensity	Detection/ Tracking/ Identification
[76]	Incoherent light source (imaging side)	Conventional camera	Intensity	Detection/ Tracking/ Identification
[77]	Incoherent light source (imaging side)	Conventional camera	Intensity	2D reconstruction
[78]	Speaker	Microphone	Acoustic "ToF"	3D reconstruction

Si SPAD corresponds to $300 \sim 1100nm$, Ge SPAD corresponds to $800 \sim 1600nm$, and InGaAs SPAD corresponds to $900 \sim 1700nm$ [83]. Therefore, most existing methods with visible light (e.g., $675nm$ in [1]) used Si SPAD (e.g., PDM series from Micro Photon Devices), while the recent $1.43km$ NLOS imaging [16] with infrared spectrum ($\sim 1550nm$) used InGaAs/InP negative-feedback SPAD.

Combined with time-correlated single-photon counting technology, SPAD can be used to obtain a histogram of photon arrival time of different points, i.e., transient images. In addition to the relatively lower cost (about 10000£), compared to streak cameras, SPAD has the following advantages. First, as a subset of APDs (avalanche photodiode), although the temporal resolution ($\sim 20ps$) is lower than streak cameras, the SPAD has a higher quantum efficiency ($\sim 70\%$) which means that it is more suitable for NLOS imaging scenes with weak effective signals. The work in [16] which used SPAD to complete an amazing $1.43km$ NLOS imaging is a typical example. Moreover, SPAD has been widely used in commercial LiDAR systems, and the SPAD array, which can avoid the mechanical raster scan process, has the potential to save scanning time and realize real-time data collection for active NLOS imaging.

Pulsed laser In transient imaging, the laser plays the role of illumination, triggering, and synchronization. Compared with time-resolved detectors, lasers have relatively low requirements and are more affordable than detectors. Nevertheless, it should still meet the following requirements. First, the pulse period of the laser should be adjustable to ensure that it can meet the requirements of different scene sizes without causing excessive noise. Second, in order to achieve accurate synchronization, the pulse width of the laser should be narrow with low jitter. Besides, its wavelength should be consistent with the response frequency of the detector.

Although the combination of pulsed lasers and time-resolved detectors suffer from long scanning time when collecting data, it is still the most popular active NLOS imaging camera method. It can obtain accurate time information and the potential applications of scanning-free technologies, such as SPAD array [15], [65], [84].

Edge-resolved transient imaging. Rapp et al. combined active transient sensing with a ubiquitous vertical edge occluder [85]. A pulsed laser scans a short semicircular arc around the edge while a gated SPAD records photon-arrival histograms; differencing adjacent histograms suppresses the approximately static visible-scene and background terms and isolates the response of successive angular wedges. The resulting edge-resolved transient measurements provide range from time of flight and azimuth from occlusion coding, enabling a 2.5D plan-view-plus-height reconstruction over a 180° field of view from only 45 illumination positions. This hybrid of active ToF sensing and corner-camera occlusion substantially reduces the aperture and number of measurements required for room-scale hidden-scene recovery.

Recent SPAD Advances. Specialized SPAD array designs tailored to NLOS imaging have emerged in recent years to address detector saturation from strong direct-path reflections. Riccardo et al. developed a fast-gated 16×16 SPAD array with 16 on-chip 6ps time-to-digital converters that can selectively gate out the direct-bounce photons while recording the weaker NLOS signal [86]. Taking this further, gradient-gated SPAD arrays apply a spatially varying gate delay across the pixel array, providing improved suppression of saturating photons with minimal hardware overhead [26]. Beyond silicon SPADs, Feng et al. demonstrated NLOS imaging at infrared wavelengths ($\sim 1550nm$) using a superconducting nanowire single-photon detector (SNSPD), which offers superior timing jitter and detection efficiency at telecommunication wave-

lengths [27]. Operating at infrared wavelengths enables NLOS imaging under stronger ambient light and through atmospheric conditions that challenge visible-wavelength systems.

Miniaturized TCSPC electronics. Compact timing electronics are becoming a deployment bottleneck rather than only detector sensitivity. Wu et al. integrated a four-channel TCSPC module around a commercial TDC ASIC, providing a 10 ps bin size and 27.4 ps minimum RMS timing resolution [53]. In a 1550 nm confocal single-photon NLOS experiment at a 5 m sensor distance and 1 ms pixel dwell time, the module supported 6.3 cm lateral and 2.3 cm depth resolution. This work moves the Velten–phasor-field sensing chain toward compact handheld or vehicle-mounted implementations by miniaturizing the timing backend rather than changing the inverse model.

Active Focusing for High Resolution. An entirely different paradigm uses wavefront shaping rather than time-of-flight to realize NLOS imaging. Cao et al. proposed the UNCOVER (Unseen Non-line-of-sight Casted Optical aperture Visibility-Enhanced Return) method, which actively focuses light through the scattering relay wall onto the hidden target using iterative wavefront shaping, then reconstructs by raster scanning the focus [87]. This approach achieves a distance-to-resolution ratio of approximately 900, surpassing conventional ToF-based NLOS imaging by more than an order of magnitude. At a target distance of 0.55 m, UNCOVER achieves a spatial resolution of ~ 0.6 mm, demonstrating the potential of active-optics-based NLOS imaging for millimeter-scale resolution.

2) *Modulated light source and ToF camera:* In addition to the pulse-based ToF measurement, by encoding the ToF into phase measurement, a ToF camera combined with a modulated light source has also been proposed to obtain the light travel time to complete NLOS imaging [5], [69]. Compared with pulse-based photon-level detectors, ToF cameras have some obvious advantages. First, it can complete data collection without scanning, thereby reducing data collection time. Second, its price is much lower (about 1000€) than streak camera and SPAD. However, due to the influence of frequency aliasing, the measurement distance of the ToF camera is limited (no more than 10 m). Besides, due to the longer exposure time, the ambient noise of the ToF camera is usually greater, limiting the temporal resolution to ns level with cm imaging resolution. However, in practical active NLOS imaging scenarios, the modulated light source and ToF camera are on the same side, which would increase the direct bounce signal from the wall and decrease the hidden signal (the third-bounce light), resulting in poor SNR. Therefore, in general, the ToF camera is more suitable for NLOS scenes that require real-time performance without high imaging quality.

Caligiuri et al. demonstrated that the lower-cost modulated-light branch can be pushed to commodity indirect-ToF hardware: NIGHT uses an off-the-shelf iToF sensor without additional time-resolved instrumentation and learns a virtual-mirror representation that maps multipath measurements to hidden-scene depth [70]. Together with a purpose-built synthetic dataset, the method shifts consumer-ToF NLOS from analytic

phase-based models toward learned reconstruction, although its reported validation remains primarily synthetic.

3) *Active light source and interferometry:* Pulse-based detectors and coherent-based ToF cameras are the two main active NLOS imaging cameras. However, their resolution is strongly restricted, difficult to break through the $\sim mm$ level. The resolution of the pulse-based detector is limited by the pulse width of the laser ($\sim ps$), while the coherent ToF camera is limited by the modulation frequency ($\sim ns$). To achieve higher resolution ($\sim \mu m$), interferometers have also been applied to NLOS imaging. Unlike those ToF-based cameras that can only be used for active imaging as mentioned above, the interferometer can not only be combined with narrowband LEDs or coherent light for active imaging, but also be used with ambient light for passive imaging. For active methods, Xin et al. used the imaging device in [88] to complete the NLOS imaging of coin-sized scenes and achieved femtosecond scale resolution [46]. Willomiitzer et al. utilized lasers with two wavelengths to complete high-resolution NLOS imaging based on superheterodyne interferometry (SHI) with a resolution of about $50 \mu m$ [67]. Some studies performed passive NLOS imaging by applying narrowband or ambient illumination to hidden objects, which will be introduced in Section III. Compared with streak cameras, SPAD, and ToF cameras, the interferometers can achieve higher resolution but with the disadvantages of higher hardware complexity and cumbersome calibration.

4) *Laser and conventional camera:* In this paper, a conventional camera refers to a camera that uses conventional intensity sensors, such as CCD or CMOS array, which cannot record spatial/temporal coherent information or ToF information. Since transient images cannot be measured, imaging using traditional cameras is often called steady-state imaging. Because conventional cameras can only record intensity information, they are mainly used in passive NLOS imaging. However, because the conventional camera has the advantages of not requiring scanning and low cost, Chen et al. completed RGB active NLOS imaging using lasers with different wavelengths for illumination and exploiting conventional cameras to collect intensity information [72]. Due to the lack of distance information, it is not easy to complete high-precision three-dimensional reconstruction only using conventional cameras.

5) *LiDAR:* Although most existing works have used separate light sources and detectors, recent work [71] exploited a commercial LiDAR, which integrated light source and detector, to complete NLOS imaging. For the imaging area on the relay surface that is close to LiDAR, most of the collected information is the direct reflection from the relay surface. However, for the area on the relay surface that is closer to the hidden object, the collected information mainly encodes the shape of the hidden object, which can be utilized to restore 3D shapes. The existing commercial LiDAR can only provide point cloud output, instead of transient images. Therefore, the classic active NLOS reconstruction methods, such as FBP [3], LCT [1] and phasor field [2], cannot currently be used in LiDAR-based systems. [71] used deep learning to fuse point cloud information and reflection intensity information

to complete the reconstruction. Compared with separate laser and time-resolved detectors, integrated LiDAR have lower cost and faster imaging speed, with the cost of poor imaging detail. To replace the separate laser and cameras in NLOS systems, existing commercial LiDAR needs to solve the problem of crosstalk between multi-channel lasers under NLOS conditions and provide original temporal signals rather than point cloud after processing.

B. Forward propagation model

The forward propagation model of active NLOS imaging aims to establish the imaging model of measurement. The current imaging models are mainly divided into ToF-based imaging models and wave-based imaging models. The ToF-based imaging model [1], [3] uses geometric optics to establish the model with the flight distance and surface albedo or normal direction as constraints. The wave-based imaging model [6], [7] mainly uses wave optics to construct the propagation and reflection of waves with boundary conditions.

1) *ToF-based model*: The transient-based forward model established using time of flight as a constraint is a classic active NLOS imaging model. This type of model is based on point-by-point scanning, leading to a long scanning time. Therefore, there are many methods proposed to improve the scanning mechanism, represented by the confocal setting [1]. Besides, 3D reconstruction is an ill-posed problem, and using partial occlusion to add additional constraints is also a representative improvement [12]. Therefore, we review the general ToF-based NLOS image formation model, followed by the confocal imaging and occlusion-based models.

General NLOS imaging model. The imaging model fits the optical transport process by expressing the measurement data τ as a function of the hidden object space $\Omega \in \mathbb{R}^3$. As shown in Fig. 1-(a), the emitted laser first irradiates at the illumination point μ on the wall, causing the first bounce. Then, the second bounce occurs on the surface of the hidden object. Finally, the detection point μ' on the wall is collected after the third bounce. For a given illumination point μ , the collected signal τ by the detection point μ' at time t can be expressed as [1]

$$\tau(\mu, \mu', t) = \int_{\Omega} \rho(s) F(\mu \rightarrow s \rightarrow \mu') R(\mu \rightarrow s \rightarrow \mu') B(\mu \rightarrow s \rightarrow \mu') ds \quad (1)$$

where s represents a point on the hidden object, and $\rho(s)$ represents the albedo of point s . F refers to the optical transfer process from the illumination point μ to the detection point μ' , reflected at the surface of hidden object s . R means the amplitude attenuation. B represents the bidirectional reflectance distribution function (BRDF).

According to geometric optics, with the speed of light c , the optical transport process F should satisfy $\|\mu - s\|_2 + \|\mu' - s\|_2 = ct$, which can be represented by delta function $\delta(\cdot)$. Please note that this $\delta(\cdot)$ function is established based on two assumptions: (1) Only three-bounce light is considered; (2) There is no interreflection in the hidden scene. The attenuation is inversely proportional to the square of the distance.

Therefore, assuming that light scatters isotropically, Eq. (1) can be re-written as

$$\tau(\mu, \mu', t) = \frac{1}{\|\mu - s\|_2^2 \|\mu' - s\|_2^2} \int_{\Omega} \rho(s) \delta(\|\mu - s\|_2 + \|\mu' - s\|_2 - ct) ds \quad (2)$$

Equation (2) can be discretized into a linear transform of equations

$$\tau = A\rho \quad (3)$$

where A is the optical transport matrix, which maps the hidden scene ρ to measurement τ . In the general NLOS setup, ρ has three spatial dimensions of x , y , and z , and τ has 5 dimensions (4 spatial dimensions and 1 time dimension). Therefore, the calculation complexity of matrix A is extremely high. Besides, it is an under-constrained problem inherently. In addition, too many scanning points lead to a long scanning time. In order to solve these problems, many new methods have been proposed (see Sec. II-E2 for details). The confocal setup [1] and adding additional obstacles [12], [41] are frequently used methods in recent studies, as introduced in the following.

Confocal NLOS imaging model Through a beam splitter, the laser and the detector can be placed coaxially, which means “confocal”, as shown in Fig. 1-(b). In the confocal NLOS imaging model, the illumination and detection points are same during each scan, i.e., $\mu = \mu'$, which can be substituted into Eq. (2)

$$\tau(\mu, t) = \frac{1}{\|\mu - s\|_2^4} \int_{\Omega} \rho(s) \delta(2\|\mu - s\|_2 - ct) ds \quad (4)$$

O’Toole et al. proved that under confocal conditions, the imaging model could be further converted to the convolution of the hidden object albedo ρ after resampling with the system response function, which can be solved quickly by Fourier transform. However, under the confocal setting, the SPAD detector receives direct reflections, which may aggravate the pile-up effect [89]. In order to alleviate the influence of direct reflections, [16] and [1] illuminate and image two slightly (to avoid affecting the confocal imaging model) different points on the relay wall.

Occlusion-based active NLOS imaging model For the occlusion-based imaging model, a visibility term $V(\mu, \mu', s)$ describes whether the illumination and observation paths connecting relay-wall points to a hidden point remain unblocked. Thrampoulidis et al. showed that the binary masks cast by natural hidden-scene occluders make the rows of the optical transport matrix substantially more diverse, improve its conditioning, and can therefore replace fine time-of-flight resolution when recovering a static hidden reflectivity map [12]. Partial-occlusion formulations further allow $V(\mu, \mu', s)$ to vary continuously while jointly estimating surface geometry and normals [41].

Xu et al. translated this principle into a photon-efficient room-scale experiment [60]. Their forward model accounts for three-bounce attenuation, known occluder geometry, background light, and the binomial statistics of a non-photon-number-resolving SPAD. By integrating the third-bounce detections rather than using their arrival-time structure, the system reconstructs two-dimensional hidden-wall reflectivity with

roughly sixteen times fewer detected photons than the preceding Gaussian-noise treatment. This branch of active NLOS thus established environmental occlusion as a computational aperture rather than merely a nuisance and anticipated later edge-resolved and passive computational-periscopy methods.

It should be noted that Eq. (2) only considered 3-bounce diffuse reflections. Since the number of photons decreases exponentially with the order of diffuse reflections, 3-bounce reflections is sufficient for current NLOS imaging. The limitations of 3-order reflections are discussed in detail in [13].

2) *Wave-based model*: The wave-based NLOS imaging model regards the forward imaging model as the propagation of waves from hidden objects to detectors in 3D space. Lindell et al. recorded the light field in space as $\Psi(x, y, z, t)$, then the forward model can be converted to wave propagation from $\Psi(x, y, z, t = 0)$ to $\Psi(x, y, z = 0, t)$. Specifically, The time-dependent field Ψ can be written as a superposition of plane waves [7]

$$\Psi(x, y, z, t) = \iiint \Phi(k_x, k_y, k_z) e^{2\pi i(k_x x + k_y y + k_z z - ft)} dk_x dk_y dk_z \quad (5)$$

where the wave vector $\mathbf{k} = 2\pi \cdot (k_x, k_y, k_z)$ indicates the direction of propagation of the independent plane wave [7]. $f = c\sqrt{k_x^2 + k_y^2 + k_z^2}$ means the relationship between the wave vector $\mathbf{k}$ and frequency f when the speed of light is c . The function Φ represents the amplitude and phase of each plane wave at $t = 0$. After that, f - k migration is used to solve the problem in the frequency domain through fast Fourier transform (FFT) and Stolt interpolation (see Sec. II.D.II-D2 for details).

The phasor field methods [2], [6], [68], which have attracted widespread attention recently, regard the NLOS imaging as a diffraction-based LOS (line-of-sight) optical imaging problem. The projector function and diffraction function are determined by selecting a suitable LOS template, thereby directly reconstructing the hidden scene. Although based on wave propagation, these methods are all suitable for ToF measurement, making it easy to collect data and apply the model to public NLOS imaging datasets.

Nonuniform and scaled Fourier sampling. FFT-accelerated LCT, f - k migration, and phasor-field methods conventionally couple acquisition and reconstruction to uniform Cartesian grids. Sultan et al. showed that practical relay measurements are often spatially oversampled and introduced modified Fourier operators that preserve fast wave-based inversion while relaxing this coupling [58]. Their NUFFT formulation reconstructs from sparse, irregularly sampled relay regions of arbitrary shape and evaluates the hidden volume at arbitrary locations, while a scaled FFT enlarges the reconstructed volume without increasing the number of stored samples. This development shifts Fourier-domain NLOS from fixed-grid acceleration toward acquisition-aware and memory-aware sampling without sacrificing FFT-like asymptotic complexity.

Wave propagation on non-planar relay surfaces. The fast convolutional forms of LCT, f - k migration, and conventional

phasor-field propagation usually assume that illumination and detection samples lie on a planar relay wall. Gu et al. relaxed this restriction with 3D Rayleigh–Sommerfeld diffraction (3D RSD), decomposing propagation from a measured non-planar relay surface to the hidden volume into two stages connected by a planar proxy [57]. This construction retains efficient wave-based propagation while accounting for curved or irregular relay geometry, and forms an important intermediate step between planar virtual-wave solvers and later arbitrary-relay inverse-rendering and Gaussian-transient formulations.

C. Reconstruction topology

The reconstruction algorithms of active NLOS imaging have been developed rapidly in recent years [1], [6], [46]. Here, we review these reconstruction methods from two aspects: topology and methodology. Reconstruction topology is classified according to different reconstruction targets (Volumetric, Surface and High-level representation), and reconstruction methodology is based on different reconstruction methods (Inverse method and Wave-based methods).

1) *Volumetric*: The volumetric NLOS methods reconstruct the hidden scene by estimating the albedo values of the hidden scenes, which is the most naive idea in NLOS reconstruction. In 2012, Velten et al. used filter back projection (FBP) to estimate the albedo of the hidden object surface based on the measurement data and completed the NLOS reconstruction for the first time [3]. Many classic algorithms, such as light cone transform (LCT) [1], which exploited confocal settings to convert NLOS reconstruction into a 3D deconvolution problem, and wave-based algorithms [6], [7], all aim to restore the albedo of voxels.

The volumetric methods usually have a faster recovery speed (less than 1s for 64×64 spatial resolution [49]). However, because they do not estimate the surface parameters (e.g., normals and BRDFs) of the hidden scene, these methods are not good at recovering details [44], [49].

2) *Surface*: Unlike the above methods that use volumetric albedo to represent NLOS scenes, a line of work aims to reconstruct the surface of hidden objects. Such methods usually use special photon measurements (rather than using all photon measurements in volumetric albedo methods [1], [3]) to get detailed geometry. Tsai et al. found that the first-returning photons contain the shortest length information to the hidden object, from which the boundary and the surface normal vector of the hidden object can be reconstructed [90]. Xin et al. showed that the discontinuities of ToF measurement are produced by special light paths (Fermat Paths), which contain the surface information of the hidden scene [46]. Since these discontinuities are independent of photon intensity, this approach is robust to different BRDFs.

Implicit occlusion fields beyond Fermat-visible surfaces. Grau et al. linked recoverability analysis with neural implicit surface reconstruction by representing the hidden object as the decision boundary between points that are visible from at least one relay-wall sample and points occluded behind the target [55]. In contrast to memory-intensive voxel albedo and the conservative specular Fermat-path criterion, the learned

occlusion field can be converted into an adaptively tessellated mesh, recovers surface portions outside the Fermat-visible set, and remains robust when the target self-occludes across parts of the relay aperture. This direction shifts the role of learning from directly regressing a predefined shape representation toward learning which regions of hidden space are geometrically recoverable, providing an early bridge between physical visibility constraints and later neural implicit NLOS surfaces. Besides, by introducing surface normal into the previous transport matrix in Eq. (8), the surface normal reconstruction and volumetric albedo reconstruction can be combined to achieve good results [41]. Similarly, fusing the surface reconstruction into the convolution kernel of the LCT [1] can also achieve better reconstruction results than using only the volumetric albedo representation [49].

Geometric constraints on hidden surface normals. Liu et al. extended the LCT/DLCT line toward sparse and short-exposure surface reconstruction by jointly optimizing transient consistency, volumetric albedo, and projected depth/albedo maps [54]. Instead of estimating a free three-dimensional normal field, their model regularizes the Frobenius norm of the shape operator of the depth map, directly constraining spatial variation of hidden-surface normals while retaining geometric detail. This reduces the dimensional burden of joint albedo-normal estimation and, on measurements acquired within 15 seconds, was reported to recover more accurate surfaces with roughly a thirty-fold speedup over a prior surface-reconstruction baseline. The method marks a model-based trajectory complementary to neural implicit surfaces: stronger geometric priors can make under-sampled transient inversion both more detailed and computationally practical.

The above methods restore the surface of the hidden object directly, while other methods adopt the concept of reverse rendering, i.e., to reconstruct the hidden surface by finding the surface parameters (such as BRDF and surface normal) of the hidden object that can fit the measurement data. Considering that accurate reverse rendering methods are time-consuming, a differential renderer can be used to speed up rendering [44].

3) High-level representation: Besides volumetric and surface-based methods, with the rapid development of deep learning in recent years, some works have exploited high-level representation to complete NLOS reconstruction [17], [18]. Specifically, in a data-driven manner, an encoder is used to extract high-dimensional features of the measurement data, while a decoder is used to map them to the hidden object space to complete the reconstruction. Due to the lack of suitable data sets and the incomplete exploration of the network structure, such methods usually have limited generalization capabilities and reconstruction effects. However, compared to traditional reconstruction methods [1], [6], [46], [49], the high-level representation methods based on deep learning have faster inference speed (less than 100ms) and stronger feature extraction capabilities, which is a kind of promising methods.

To emphasize the application prospect of deep learning in NLOS imaging, this paper puts all deep learning methods into Sec. IV. Therefore, please refer to Sec. IV for detailed discussion and challenges of the high-level representation

methods.

D. Reconstruction methodology

Active reconstruction algorithms can be divided into two categories according to reconstruction methodology: inverse methods and wave-based (forward) methods.

1) Inverse methods: It can be seen from the forward propagation model (Eq. 1) that what the active NLOS imaging completed is the inverse process, that is to recover the hidden scene ρ from the measurement $\tau(\mu, \mu', t)$. Under the assumptions of isotropic reflection, no interreflection and only three-bounce light, Eq. 1 degenerates into a linear model, which can be solved by a variety of inverse methods (e.g., back projection [3], [4], [43] and matrix inverse [1], [5]).

Back projection For general NLOS imaging scenes, the Dirac function in Eq (3) essentially represents an ellipsoidal constraint

$$r + r_l = ct \quad (6)$$

The reconstruction of this model is similar to the ellipsoidal Radon transform used in CT. In confocal NLOS imaging, the ellipsoidal constraint degenerates into a spherical constraint, and the corresponding reconstruction also becomes the spherical Radon transform in CT. Therefore, the back projection algorithm can be directly used to complete the NLOS reconstruction task. In 2012, Velten et al. used the back projection algorithm to complete the NLOS imaging experiment for the first time [3]. Afterward, researches such as the use of GPU acceleration [4] and error back projection using iterative algorithms [43] have also been proposed. Since it has been widely used in CT, the back projection algorithm is simple, easy to understand, and has a low space complexity ($O(N^3)$), which can effectively reconstruct simple hidden scenes. However, the back projection algorithm's time complexity is relatively high ($O(N^5)$), and it is difficult to use other prior information, unable to reconstruct a complex optical transport process.

Matrix Inverse. In addition to the back projection algorithm based on the ellipsoidal constraint, NLOS reconstruction can also be completed by directly solving the inverse process of Eq. (3), that is

$$\rho = A^{-1}\{\tau\} \quad (7)$$

One straightforward approach is to directly solve the pseudo-inverse of the optical transport matrix A , such as using the singular value decomposition. Taking singular value decomposition as an example, since the optical transport matrix A is with the size of $N^3 \times N^3$, the time and space complexity of the algorithm to find the matrix inversion directly is $O(N^{3 \times 3=9})$ and $O(N^6)$ respectively, as discussed in [1]. Another obvious disadvantage of direct inversion is that it is difficult to use the inherent non-negativity, sparsity, and other priors (see Sec. IV-IV-A for details) in NLOS imaging, leading to bad results. A common alternative is to solve the following optimization problem [5] iteratively

$$\rho_{opt} = \underset{\rho}{\operatorname{argmin}} \frac{1}{2} \|A\rho - \tau\|_2^2 + \Gamma(\rho) \quad (8)$$

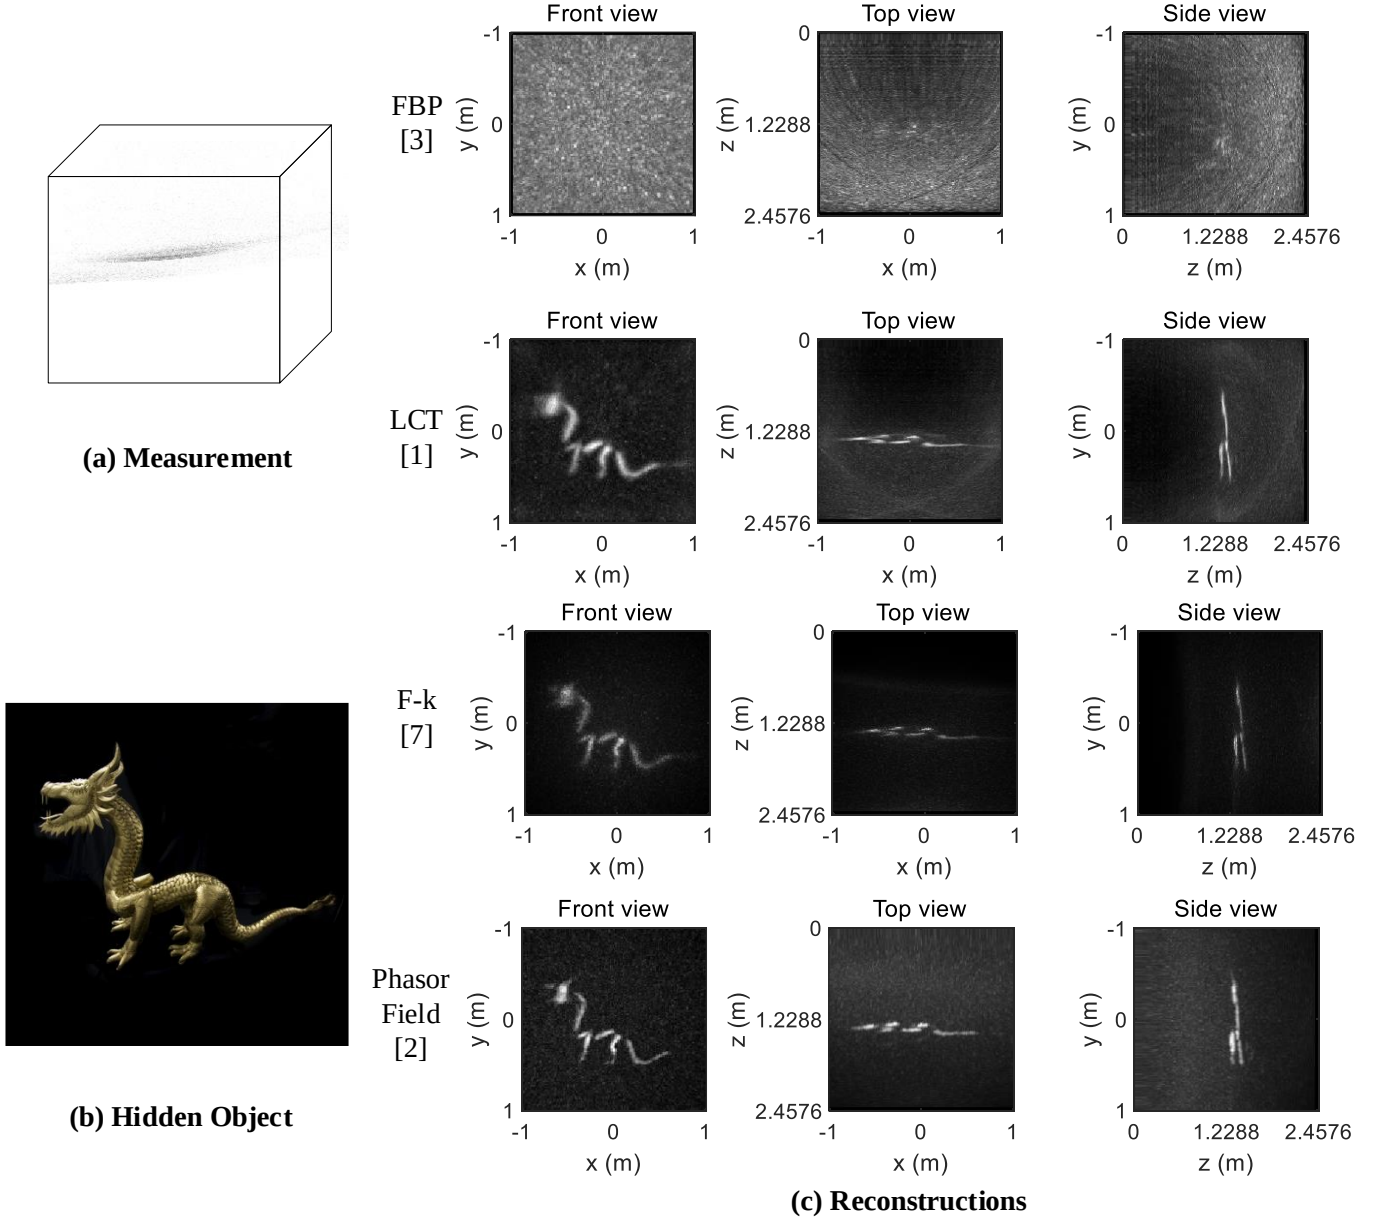


Fig. 3. Reconstructions completed by different methods. (a) Measurement data; (b) Hidden object (dragon); (c) Reconstruction results under several typical methods, including FBP [3], LCT [1], f-k migration [7] and phasor field [2]. This figure is finished based on the public code and data of [1], [7], [41], [91].

Among them, $\Gamma(\rho)$ enables this type of iterative inverse method to utilize multiple constraints. Although iterative methods [38], [39] can further reduce errors and achieve good reconstruction results, they require multiple iterations, which is still difficult to apply in real-time. O'Toole et al. [1] found that under confocal conditions, the forward imaging process can be expressed in the form of three-dimensional convolution, thus using efficient deconvolution algorithms (such as Wiener filtering) to perform the efficient reconstruction. It reduced the time complexity to $O(N^3 \log(N))$, which greatly improved the reconstruction speed.

Circular confocal acquisition and transient sinograms. Isogawa et al. asked whether confocal NLOS could reduce the relay-wall scan itself rather than only accelerate inversion [52].

Their C²NLOS acquisition samples a one-dimensional circle instead of a dense two-dimensional raster. After the light-cone-transform time reparameterization, each hidden scatterer traces a sinusoid whose amplitude, phase, and offset encode its three-dimensional location; Hough voting, inverse-Radon reconstruction, or compact linear inversion then recover hidden positions and images. This direct extension of confocal LCT and $f-k$ migration established structured scan-path design as a route toward rapid NLOS capture, anticipating later sparse, irregular, and learning-based sampling methods.

Inverse Rendering. Back projection [3], [43] and matrix inverse methods [1], [5] are both based on voxel representation in reconstruction topology. The voxel-based representation is easy to solve mathematically, but the accuracy is usually

low due to ignoring factors such as BRDF and non-Lambert reflections [44]. On the other hand, by representing the surface of the hidden object, a more accurate forward imaging model (see [44]) can be established, based on which the optimization methods can be used to solve it to complete the surface reconstruction. Since the imaging models based on surface parameters (such as BRDF and surface normal) rely on rendering, the corresponding reconstruction methods are also referred as inverse rendering, or analysis-by-synthesis. Compared with voxel-based inverse methods, inverse rendering can reconstruct more details, but often requires higher temporal complexity [41], [49].

Beyond volumetric albedo: direct surface optimization.

Tsai et al. introduced a foundational analysis-by-synthesis framework that optimizes hidden surface geometry and reflectance directly, rather than first recovering an unoriented volumetric albedo field [44]. Their radiometric rendering formulation efficiently computes derivatives of transient measurements with respect to both NLOS shape and reflectance while retaining the underlying multi-bounce transport physics. Coupled with stochastic optimization and geometry-processing regularization, this surface representation reconstructs substantially finer geometric detail than earlier volumetric inversions. It established the explicit surface-optimization branch that later progressed toward physically based transient renderers, analytical differentiable rendering, neural implicit surfaces, self-calibration, and Gaussian transient representations.

Physically based transient analysis-by-synthesis. Iseringhausen and Hullin established an early physically grounded inverse-rendering formulation for transient NLOS surface reconstruction [50]. Instead of backprojecting measurements into an unoriented voxel volume, their method represents the hidden object as an implicit level-set surface, renders wall–object–wall transport with a custom GPU transient renderer, and globally optimizes the scene to match measured transients. The forward model explicitly includes surface orientation, BRDF-dependent scattering, shading, visibility, and self-occlusion, allowing detailed recovery under substantial noise and non-diffuse reflectance. This analysis-by-synthesis milestone supplied the conceptual and computational bridge from surface optimization to later differentiable transient renderers, neural transient fields, self-calibrating inverse rendering, and Gaussian transient scene representations.

Fast differentiable transient rendering. Plack et al. introduced a physically based differentiable transient renderer tailored to NLOS reconstruction [92]. By making gradients through time-resolved light transport efficient enough for consumer hardware, their analysis-by-synthesis pipeline reduces inverse-rendering runtimes from hours to minutes while improving optimization stability. The same renderer also supports self-supervised learning, forming an important bridge between explicit transient inverse rendering and later self-calibrating or learned NLOS reconstruction pipelines.

Self-calibrating differentiable NLOS inverse rendering.

Choi et al. closed a complementary deployment gap by coupling phasor-field volumetric reconstruction in the frequency domain with differentiable path-space transient rendering in

the temporal domain [56]. Starting only from measured transients, the end-to-end pipeline ray-marches the reconstructed volume to extract hidden surface points and normals, then jointly optimizes virtual-illumination and diffraction-filter parameters, the combined laser–sensor temporal response, and per-surface albedo by minimizing the discrepancy between rendered and measured transients. This self-calibration removes much of the manual filter and hardware-response tuning required by earlier wave-based pipelines, improves geometry and reflectance recovery under substantial noise, and forms a direct methodological bridge from efficient differentiable transient rendering to later neural-field and Gaussian transient representations.

2) *Wave-based methods:* The theoretical basis of the three types of algorithms mentioned above is geometric optics. Besides that, wave-based methods have also achieved rapid development in recent years. Lindell et al. described NLOS imaging as a wave propagation problem in three-dimensional space. Inspired by inverse methods used in seismology, it completed NLOS imaging using f-k migration [7]. In that work, referring $\Psi(x, y, z, t)$ as the field in 3D space as a space-time function, the NLOS reconstruction is converted as

$$\Psi(x, y, z = 0, t) \Rightarrow \Psi(x, y, z, t = 0) \quad (9)$$

where $\Psi(x, y, z = 0, t)$ and $\Psi(x, y, z, t = 0)$ can be regarded as the available measurement data and the hidden target scene, respectively. With $t = 0$, the functions Φ and Ψ in Eq. 5 are related by a Fourier transform. By replacing dk_z with d_f and using Stolt interpolation, Eq. 5 can be converted to another representation. In the new representation, when $z = 0$, functions Φ and Ψ are again a pair connected by Fourier transform. In this way, taking $\Psi(x, y, z = 0, t)$ as input, the hidden scene $\Psi(x, y, z, t = 0)$ can be easily reconstructed through three steps: 3D Fourier transform, Stolt interpolation, and inverse 3D Fourier transform. Strictly speaking, f-k migration [7] is an inverse method (reconstruction through the reverse process of forward propagation). However, compared to other typical inverse methods such as back projection [3], [4], matrix inverse [5] and inverse rendering [44], f-k migration does not have an obvious inversion process (e.g., ADMM [1]), but is more like a forward process completed in the frequency domain.

Besides, Liu et al. [2], [6] and Reza et al. [68] introduced virtual wave phasor to NLOS imaging. Based on the phasor field, NLOS imaging can be transformed into a LOS optical imaging problem and then solved by the existing algorithm in diffraction imaging. Different from other methods, phasor field methods [2], [6] transform the relay wall into a virtual aperture (or lens of any LOS system). The reconstruction is the diffraction integral of the wavefront of the virtual aperture, which is equivalent to the forward propagation process of the measurement data. Therefore, phasor field methods [2], [6] do not need to reverse the forward process like inverse methods [1], [3] – they can directly complete the reconstruction through wavefront propagation.

Virtual light-transport analysis. Marco et al. extended phasor-field virtual wave optics beyond hidden-geometry reconstruction by constructing computational projector–camera

pairs and estimating a virtual light transport matrix of the hidden scene [93]. Probing this matrix enables virtual re-lighting and separates direct, first-order indirect, and higher-order indirect illumination in cluttered NLOS scenes, showing that transient NLOS measurements can support light-transport analysis as well as geometric imaging.

Visibility limits and recoverability. Beyond developing faster inverses, Liu et al. analyzed which hidden-scene features are physically visible in transient NLOS measurements [13]. Their study connects recoverability to surface orientation, finite relay-wall aperture, and acquisition geometry, explaining why some surfaces remain weak or absent even under accurate reconstruction. This visibility perspective established an important limit-aware complement to LCT, f - k migration, and phasor-field propagation, and motivates later methods that explicitly model normals, occlusion, and adaptive capture.

The wave-based approaches have two attractive advantages:

- (1) It is more robust to the material of the relay surface;
- (2) It can easily combine NLOS imaging with other related fields, such as LOS imaging and seismic imaging. These advantages, as well as the phase acquisition problem in wave-based approaches, are explained in detail in Faccio et al.'s review [23].

Extensions to Non-Planar Relay Surfaces. The classical ToF and wave-based models assume a planar relay wall, restricting applicability to flat, vertical surfaces. Gu et al. proposed a fast algorithm that generalizes confocal NLOS reconstruction to arbitrary non-planar relay surfaces by transforming the measurements to an equivalent planar configuration, enabling efficient FFT-based reconstruction even when the relay geometry deviates from a plane [94]. Similarly, Liu et al. introduced a Bayesian framework with confocal-complemented signal-object collaborative regularization (CC-SOCR) that handles arbitrary illumination and detection patterns on the relay surface without requiring a regular grid [95], greatly broadening the applicability of NLOS systems to irregular or partial relay surfaces encountered in real-world scenarios.

Moving from arbitrary relay sampling toward extreme measurement sparsity, Liu et al. introduced signal-surface collaborative regularization (SSCR), which jointly regularizes the photon-event signal, a three-dimensional voxel representation, and a two-dimensional hidden-surface representation [96]. The method supports both confocal and non-confocal acquisition and reconstructs complex hidden geometry from as few as 5×5 confocal measurements, showing how mixed-dimensional physical priors can replace much of the dense raster scan required by earlier transient NLOS systems.

Higher-Order Bounce Imaging. Standard transient NLOS reconstruction usually truncates transport at the third bounce, which limits visibility for unfavorably oriented surfaces and confines most systems to a single corner. Royo et al. showed that planar diffuse surfaces behave specularly at the computational wavelengths of the phasor-field domain and can therefore act as “virtual mirrors” [97]. By propagating measured transients to these surfaces and constructing secondary virtual apertures, their method recovers limited-visibility geometry and objects hidden behind a second corner without requiring

physical specular reflectors. This result shifts higher-order light transport from a discarded nuisance to an additional imaging resource.

Phasor Fields under Scattering Conditions. The phasor field framework assumes a clean relay surface, but in practice the relay surface may be contaminated by scattering media (e.g., dust, fog). Luesia et al. systematically analyzed the behavior of phasor-field NLOS reconstruction under such scattering conditions, identifying the mechanisms that degrade performance and proposing modifications to improve robustness [98]. This study provides important design guidelines for practical NLOS systems operating in non-ideal environments.

It should be noted that not all of the above algorithms are suitable for confocal settings. Specifically, FBP [3], [4], phasor field [2], [6], and matrix inverse methods [5] are applicable to all NLOS systems. In contrast, LCT [1] and f - k migration [7] are only applicable to confocal NLOS systems. [7] proposed a conversion method from non-confocal data to confocal data, so that confocal algorithms can also be used to reconstruct non-confocal data. From the perspective of time complexity, for confocal settings, a series of algorithms after LCT [1] (including f - k migration [7]) can reach the time of $O(N^3 \log N)$ complexity due to the efficient calculation of FFT in the frequency domain, while only the phasor field algorithm [6] can achieve the same temporal complexity for non-confocal NLOS scenes. Figure 3 illustrates the measurement with a dragon as the hidden scene, and the reconstruction results obtained by different reconstruction methods [1]–[3], [7]. It can be seen that existing methods can already reconstruct complex hidden scenes. In general, the wave-based methods [2], [7] are more suitable for hidden scenes with rich details.

3) Transformer and Neural Representation-Based Methods: Motivated by the success of transformers and implicit neural representations in computer vision, recent works have brought these advances into NLOS reconstruction.

Transformer-based reconstruction. Li et al. proposed NLOST, the first transformer-based network for NLOS reconstruction [28]. NLOST extracts shallow features with physics-based priors, then employs two spatial-temporal self-attention encoders to capture both local and global correlations within 3D NLOS measurement volumes at different scales. A cross-attention decoder integrates these features, enabling superior reconstruction of complex hidden scenes on both confocal and non-confocal real-world data. Building on this line, Yu et al. proposed enhancing physics-based NLOS reconstruction by introducing a learnable inverse kernel in the Fourier domain combined with an attention mechanism, allowing the network to better capture high-frequency details that are difficult to recover due to spectral bias [99]. On the sensor side, Cho et al. proposed to enhance the aperture phasor field representation using a learned network, achieving state-of-the-art performance [100], while Shim et al. introduced a domain reduction strategy that identifies the most likely occupied regions in the 3D volume and focuses reconstruction effort there, reducing computational cost by an order of magnitude [101].

Neural implicit surface reconstruction. Fujimura et al. proposed NLOS-NeuS, extending neural transient fields to

neural implicit surfaces with a signed distance function (SDF) representation [102]. By incorporating SDF constraints derived from first-returning photon geometry, NLOS-NeuS enables smooth yet detailed 3D surface reconstruction in NLOS scenes, overcoming the voxel resolution limitation of volumetric methods. This represents the first neural implicit surface approach with volume rendering for NLOS scenes.

Joint LOS/NLOS holistic shape reconstruction. Huang et al. introduced Omni-LOS, which combines direct LOS transients and diffuse-wall NLOS transients in a unified neural level-set representation [103]. The method derives differentiable rendering models for straight LOS rays and spherical NLOS wavefronts, jointly optimizing visible front surfaces and self-occluded back geometry from a fixed scan position. With nearby walls acting as diffuse virtual mirrors and a SPAD-laser prototype, Omni-LOS recovers near-360° object shape without a surrounding camera or mirror rig, extending neural transient imaging from hidden-scene reconstruction toward holistic single-position 3D scanning.

Diffusion model-based reconstruction. Su et al. proposed a model-guided iterative diffusion sampling framework for NLOS reconstruction [32]. Starting from the back-projection result, the diffusion model iteratively refines the reconstruction while respecting the NLOS physical forward model as a consistency constraint. This approach achieves physically consistent reconstructions with high visual quality, benefiting from the strong generative prior of diffusion models while avoiding hallucination artifacts.

4) *Detection, location and identification:* Under some scenarios, we do not necessarily need to complete the difficult but low-level task of imaging/ reconstruction. On the contrary, some high-level vision tasks, such as detection, localization, and recognition of hidden objects, are needed. For the detection task, we only need to judge whether there is a peak in the measurement data. For localization tasks, a naive but effective algorithm is back projection [61], [66]. Through back projection, the distribution probability of objects in three-dimensional space can be established to determine the object's position. Compared with the reconstruction task, the localization task can greatly reduce the number of scanning points and the resolution of discrete voxels with much less reconstruction time and space complexity.

For recognition tasks, traditional algorithms are limited by their ability to understand high-level semantics, making it difficult to map from experimental data to label results directly. Therefore, NLOS recognition is typically based on data-driven methods (see Sec. IV for details).

Irregular, aperture-limited, and under-scanned relay measurements. Recent work increasingly relaxes the dense planar-wall assumption. DO-NLOS [104] combines convolution approximation and optimization for strongly under-scanned measurements; sub-pixel resolving modulation [105] extracts spatial detail beyond the native relay sampling grid; and CUDA-accelerated reconstruction on irregular relay surfaces [106] makes geometry-aware filtered backprojection practical on modern GPUs. These developments complement self-supervised Virtual Scanning and diffusion-based transient

completion by improving the physical solver and acquisition model rather than relying only on learned interpolation.

E. Challenges and Prospects

Despite considerable progress in recent years, active NLOS imaging still faces many challenges, including ill-posedness with low SNR, limited resolution, and long data acquisition time.

1) *Ill-posedness with low SNR:* Since the collected effective signal is three-bounce of reflected light, and the signal intensity has an attenuation of $r^{-2} \sim r^{-4}$ [1] (varies with different reflective materials) with distance r , the signal strength is weak. In many NLOS scenes (such as long-distance imaging [16], [107]), the echo can reach the order of a single photon. On the other hand, there are various kinds of noise. All of the dark count and after-pulse of SPAD, the pile-up effect of TCSPC, and the ambient light can cause noise. Therefore, NLOS imaging tasks have a very low SNR, which makes NLOS imaging very challenging. Moreover, hidden objects in different locations may contribute the same measurement value [13], which further exacerbates the problem's ill-posedness.

The methods of improving the SNR have been discussed in [16], [107], [108], including improving the receiving device to increase the detection efficiency and thus the signal strength, combining spatial filtering with multimode fiber, spectral filtering with narrow-band filters and temporal filtering through gate-mode SPAD, and using polarizers to minimize noise. Based on the above methods, an amazing 1.43km NLOS imaging can be achieved. In addition to improving the signal-to-noise ratio from the hardware, it is also important to improve the reconstruction algorithm to alleviate the ill-posedness through various prior constraints, such as the sparsity, non-negativity, surface normal, partial occlusion (as discussed in Sec. II-B2) and the recently developed data-driven scene prior (see in Sec. IV).

2) *Long data acquisition time:* Active NLOS imaging requires a full raster scan of a relay wall. This point-by-point scanning mechanism leads to long data acquisition time, which hinders real-time NLOS imaging applications. Current work usually uses a multifunction I/O device (e.g., NI DAG USB-6343) to control the galvanometer mirrors (e.g., Thorlabs GVS012) to scan point by point and completes the event synchronization with the photon counter (e.g., TCSPC, PicoHarp 300). Limited by the scanning speed of the galvanometer and the minimum number of photons at each point, the scanning frequency is only 1Hz to 10Hz (depending on the imaging conditions) in state-of-the-art NLOS systems, such as LCT [1] and f-k migration [7]. When the number of scanning points is 64×64 , the scanning speed of less than 10Hz is difficult to complete real-time data acquisition.

Reducing scanning points. In theory, each scan point in NLOS imaging contains the whole hidden object's shape information. Therefore, although reducing the scan points would inevitably reduce the imaging quality, it is possible only to scan a few points to complete the imaging task. Liu et al. studied the impact of randomly removing some test points on the reconstruction results [109]. Ye et al.

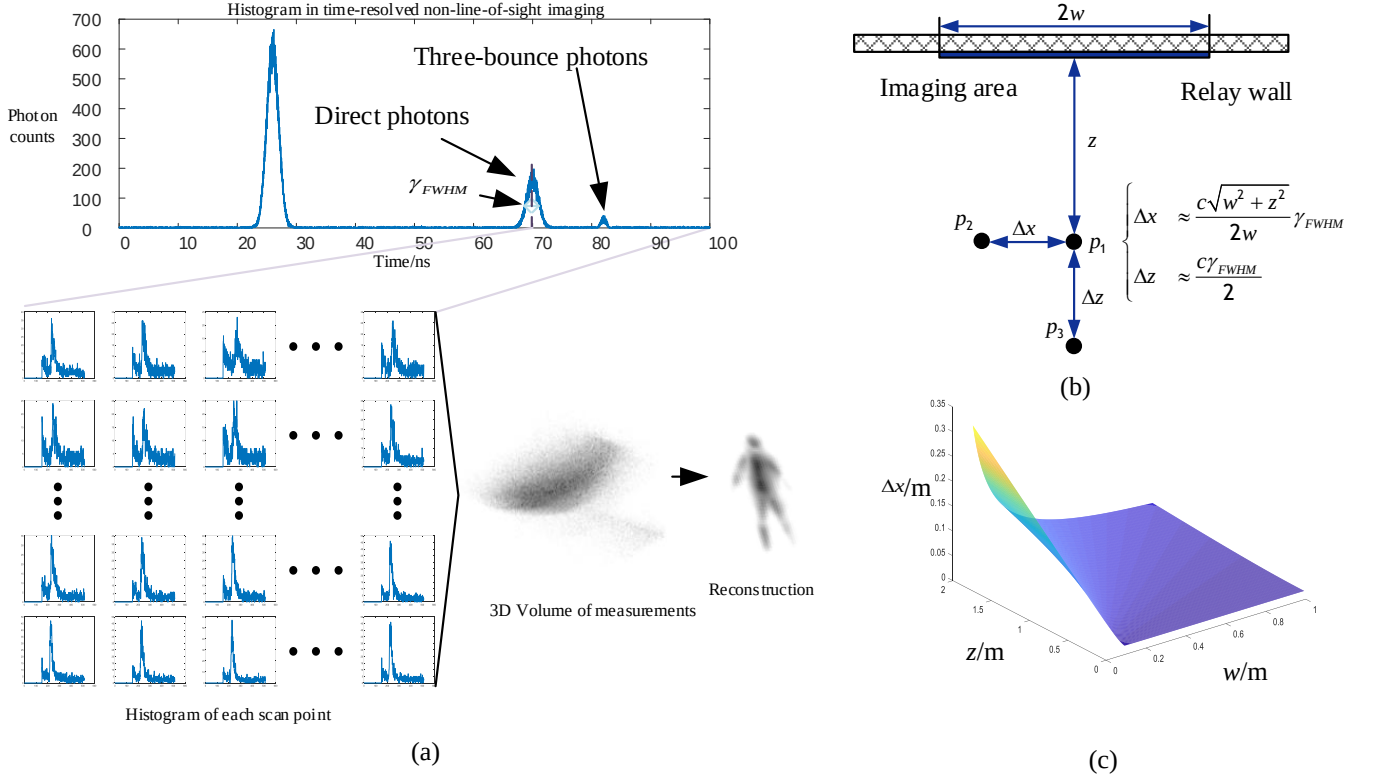


Fig. 4. The principle and spatial resolution of active (confocal) NLOS imaging. (a) The detector receives the photon arrival time histogram at each point, and these histograms form a 3D Volume of measurements τ , which can be used to recover the hidden object (albedo) ρ . The measurement data is from [1]. (b) The resolution of the imaging system. (c) The influence of the distance between the object and the wall z and the scan area size w on the horizontal resolution Δx .

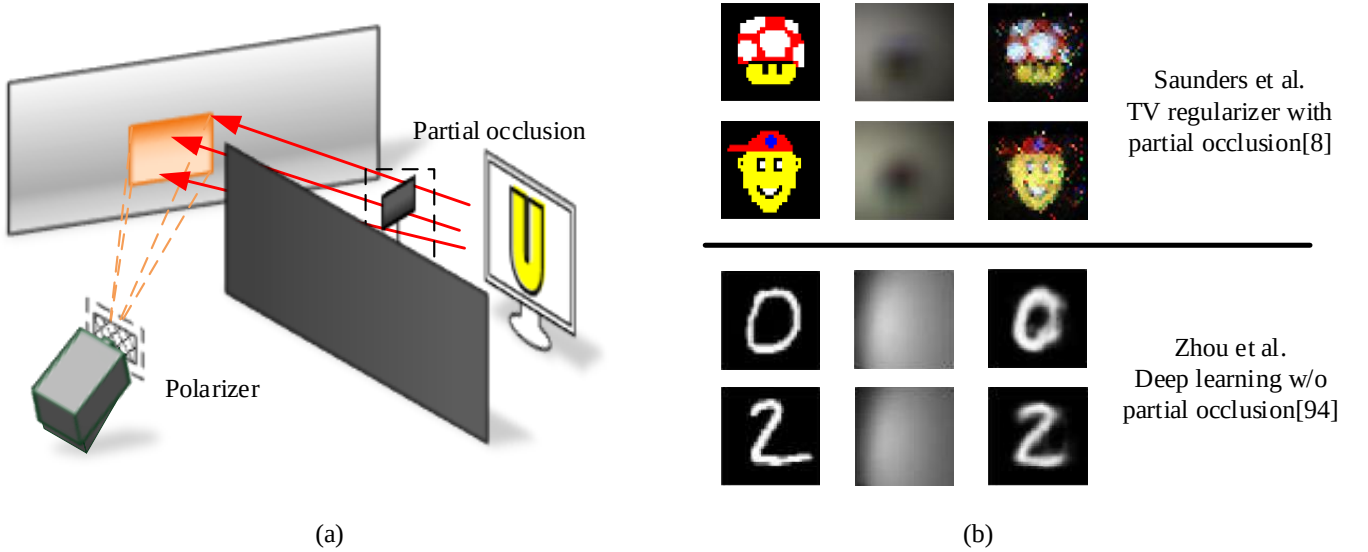


Fig. 5. Passive NLOS imaging: (a) Common constraints in passive NLOS imaging; (b) Passive NLOS imaging results.

applied compressed sensing to NLOS imaging, and only 5×5 points can achieve a resolution of 64×64 , thereby greatly reducing the time required for scanning [14]. Isogawa et al. further changed the scanning methods, using the circular scanning path, and proposed C^2NLOS (Circular and confocal

NLOS) [110]. C^2NLOS improved the limit of the scanning speed of the galvanometer through circular scanning and reduced the number of scanning points, thereby reducing the data acquisition time.

More recently, CVPR 2023 established two complemen-

tary routes to extreme sparse acquisition: SSCR uses mixed-dimensional optimization priors, while Wang et al. proposed a signal superresolution network that maps sparse scanning measurements to dense ones before reconstruction, achieving a $16\times$ reduction in acquisition time while maintaining comparable quality [96], [111]. Li et al. then proposed the first deep learning framework specifically for NLOS reconstruction from under-scanning measurements (USM), using a transient recovery network (TRN) to recover full-density transients from sparse inputs, followed by a physical-model-based volume reconstruction network (VRN) that achieves $50\times$ faster reconstruction than iterative methods [112]. Cui et al. introduced Virtual Scanning, an unsupervised framework for NLOS reconstruction from irregularly undersampled transients without requiring paired ground truth, leveraging a physics-guided denoiser to handle the noise inherent in low-photon conditions [113].

From the detection side, Li et al. proposed FPES (First Photon Event Stamping), which records only the first detected photon at each scan point [114]. By exploiting the Poisson statistics of single-photon arrival, FPES achieves comparable reconstruction quality with up to $10\times$ fewer total photons, enabling faster acquisition in photon-starved scenarios. Similarly, Liu et al. developed a photon-efficient NLOS approach that achieves robust reconstruction with fewer than one photon per pixel on average [115].

SPAD array. In addition to reducing the scanning points, the development of SPAD array to achieve scannerless NLOS imaging is a very promising direction. There have been the latest researches that develop algorithms suitable for SPAD array [6], [65] or directly use 32×32 SPAD camera to complete scannerless NLOS imaging [15]. Multiple lasers simultaneously illuminating would cause crosstalk problems, which is unacceptable. Therefore, the current NLOS imaging systems based on SPAD array all adopt the structure of "one laser, multiple pixels". In essence, this is equivalent to multiple parallel conventional non-confocal NLOS imaging systems. Therefore, any algorithm suitable for non-confocal reconstruction, including but not limited to back projection [4], f-k migration [7] and phasor field, can be used in NLOS imaging systems based on SPAD array. [15] verified that the reconstruction quality using commercial SPAD array based on phasor field [6] is close to the early single-pixel NLOS imaging [3].

Zhang et al. demonstrated a real-time scan-free NLOS imaging system achieving up to 19 fps by combining single-pixel detection with structured illumination (SPAD array) and computational reconstruction, and further demonstrated robustness to outdoor daylight conditions [116]. Towards real-time NLOS video of room-sized dynamic scenes, Ye et al. proposed a framework of spectrum filtering and motion compensation, achieving 4 fps NLOS video reconstruction of real-life dynamic scenes through denoising in the frequency domain and interleaved scanning [33]. This landmark result marks a major step towards practical deployment. Further, Li et al. developed TransiT, a transient transformer architecture for NLOS videography that reconstructs 64×64 resolution

videos at 10 fps from 16×16 sparse transient measurements via transfer learning to bridge the synthetic-to-real domain gap [29].

Before these later dynamic systems, Nam et al. combined two gated 16×1 SPAD arrays (28 active pixels), sparse relay-wall scanning, virtual-aperture remapping, and fast Rayleigh–Sommerfeld phasor-field propagation to acquire and reconstruct diffuse, non-retroreflective hidden scenes at 5 fps with approximately 1 s latency [65], providing an early full-pipeline real-time NLOS video milestone.

Steady-state imaging. Another possible alternative is to replace the pulsed laser with a steady-state laser [72] or even an ordinary condensing light source (such as a projector) [76] and use a conventional camera to collect the imaging area directly. These steady-state methods usually rely on data-driven deep learning methods for reconstruction, which will be discussed in Sec. IV. Zhu et al. proposed a two-step deep remapping framework that first remaps sparse non-confocal transients to dense confocal equivalents, then applies standard reconstruction algorithms, achieving a $4\times$ speedup over FK migration while maintaining quality [117]. Mu et al. combined a physics-based forward model with deep learning to enable high-speed NLOS reconstruction from significantly fewer and noisier measurements, demonstrating reconstruction at up to 5 fps, a $10\times$ improvement over prior approaches [118]. Snapshot NLOS acquisition—capturing hidden scene information from a single camera frame without scanning—has also advanced. Seidel et al. demonstrated a snapshot corner camera that reconstructs both hidden foreground objects and background scenes without laser scanning from a single optical response model [119].

3) *Limited resolution:* Like LiDAR and Radar, the resolution of NLOS imaging is also divided into axial resolution Δz and transverse resolution Δx . Time jitter γ , the time domain response of the imaging system greatly influences Δx , and it also determines Δz . γ mainly depends on the detector's temporal resolution, laser pulse width, laser spatial divergence, and other components. In the recent long-distance NLOS imaging research [16], the time jitter γ has been formulated. Another factor of Δx is the size of the scanning area (equivalent to the size of the aperture). Usually, we use w to represent the radius of the scanning area, as shown in Fig. 4-(b). For a confocal system, the resolution of the system in two directions Δz and Δx are [1]

$$\begin{cases} \Delta x & \approx \frac{c\sqrt{w^2+z^2}}{2w}\gamma_{FWHM} \\ \Delta z & \approx \frac{c\gamma_{FWHM}}{2} \end{cases} \quad (10)$$

Among them, γ_{FWHM} refers to the full width at half maximum (FWHM) of the time jitter γ , as illustrated in Fig. 4-(a). From Fig. 4-(c), it can be seen that reducing the time jitter γ and increasing the size of the scanning area w are effective ways to improve the confocal system resolution. For other active NLOS scenes, [13], [39], [69] discussed the limits of spatial resolution. [13] also analyzed how the position and the normal direction of the hidden object affect the imaging results from the Fourier domain.

Beyond improving temporal resolution, recent works have tackled the challenge of long-range NLOS imaging. The groundbreaking active-focusing approach UNCOVER [87] achieves ~ 0.6 mm resolution at 0.55 m, demonstrating that diffraction-limited NLOS imaging is attainable via wavefront shaping. At the system level, coherent sensing with frequency-comb calibration [120] enables NLOS imaging under strong ambient illumination conditions where incoherent ToF methods fail, additionally demonstrating the novel capability of NLOS vibrometry—remotely measuring vibrations of hidden objects. These advances substantially broaden the conditions under which active NLOS systems can operate in real-world outdoor environments.

III. PASSIVE METHODS

Passive NLOS imaging aims to see hidden scenes without using a controllable external light source, which is a very challenging problem. This section has a similar structure with Sec. II. It reviews passive NLOS imaging from three aspects: data acquisition devices, physical models, and reconstruction algorithms. Finally, we discuss the challenges and prospects of passive NLOS imaging. Table II summarizes the existing passive NLOS imaging technologies, as well as their lighting conditions, sensors, available information, and target tasks.

A. Cameras in passive methods

1) *Conventional camera*: In the absence of a controllable light source, the light field remains steady. Therefore, the most useful information is intensity, which can be recorded by conventional cameras, i.e., charge-coupled device (CCD) and complementary metal-oxide-semiconductor (CMOS). Most passive NLOS imaging research used conventional cameras to collect data. However, their illumination was uncontrollable and different, including ambient light [8], [121] and active incoherent light [122]¹. When using ambient light, the hidden scene produces shadows (or speckles) on the wall. The only information available at this time is the intensity information of the shadows. However, if a narrowband spatially-incoherent source is used for illumination, the obtained speckles can encode the hidden scene's information, which can be reconstructed by the optical memory effect [123]–[125].

Conventional cameras are the most inexpensive but have at least two limitations among all the cameras discussed in this article. First, the shadow is very sensitive to ambient light intensity, i.e., SNR decreases as the ambient light intensity increases. Second, for broadband illumination, the optical memory effect is no longer valid, due to which the problem is extremely ill-posed and usually requires additional constraints and priors.

2) *Interferometer*: Considering the limitations of intensity information, some studies employ interferometry to obtain phase information and use coherence to solve it, as illustrated in Tab. II. Batareseh et al. used the Dual-Phase Sagnac Interferometer (DuPSaI) to measure the spatial coherence of the

light field [9], thereby completing the detection and positioning of the hidden broadband ambient light source. Beckus et al. combined spatial coherence and intensity information to complete multi-modal passive NLOS imaging [126]. In addition to spatial coherence, temporal coherence can also be used to obtain depth information. Boger-Lombard et al. utilized a diffuser and an ordinary camera to provide passive ToF information through the time coherence of the measurement [10]. The interferometer enables depth information measurement in passive NLOS scenes and can be fused with intensity information to improve imaging quality. However, it requires a precise and complex calibration process, and the depth information it contains is very limited, which can only be used for discrete scenes.

3) *Hyperspectral and Multispectral Cameras*: Capturing richer spectral information beyond a single visible-light band can substantially improve passive NLOS imaging quality. Chen et al. proposed Hyper-NLOS, which uses a hyperspectral camera to capture NLOS measurements across many spectral bands and fuses them with a dedicated hyperspectral fusion network (HFN-Net) [127]. The additional spectral channels provide complementary cues that help discriminate hidden objects from background clutter. A band selection strategy can further select the most informative spectral bands to reduce measurement cost [127]. Building on this, Liu et al. proposed a multispectral passive NLOS approach via deep fusion photography that significantly improves long-distance reconstruction quality [34]. These hyperspectral and multispectral approaches represent an important direction for improving passive NLOS imaging without increasing hardware complexity on the active illumination side.

B. Forward imaging model

Considering the classic intensity-based passive NLOS imaging scene, as shown in Fig. 1-(c), the goal is to reconstruct the hidden scene based on the speckle area's intensity information d on the wall. Assuming that each point on the hidden scene is an independent point light source, the measured intensity information is

$$I_\tau(d) = \int \int_{s \in S} A(s, d) I_\rho(s) ds \quad (11)$$

Here I_τ is the observed projection image of resolution $p \times q$, $I_y(\tau)$ is the light intensity on the projection area d . I_ρ is the hidden target image of resolution $m \times n$ displayed on the screen, and $I_\rho(s)$ is the intensity of the pixel point s of I_x . Besides, $A(s, d)$ is the optical transport from the point light source s to area d on the relay wall, and S denotes all pixels on the whole screen. The model can be discretized as

$$\mathbf{I}_\tau = \mathbf{A} \mathbf{I}_\rho + \mathbf{N} \quad (12)$$

where $\mathbf{N}$ is an additional background term.

It can be seen that Eq. (3) and Eq. (12) look very similar. Because passive NLOS imaging usually only collects intensity information, the condition number of $\mathbf{A}$ in Eq. (12) is larger, meaning more ill-posed. In addition to the above-mentioned intensity-based forward model, imaging models based on other

¹Although active illumination is used, it is still considered as passive NLOS imaging because the light source is on the side of the hidden object and is uncontrollable.

principles and settings (including the Fresnel model [126], partial occlusion [8], [11], spatial coherence [9], [126], and polarizers [128]) can all be discretized to inverse optimization problems similar with Eq. (12). Passive methods based on speckle coherence have a special imaging model and reconstruction process, which will be explained in the following (see Eq. (13)).

C. Reconstruction with constraints

Passive NLOS imaging is extremely ill-posed, and it is difficult to complete high-quality reconstruction only with conventional cameras. Existing researches reduce the condition number of the transport matrix $\mathbf{A}$ by adding additional constraints, thereby improving the imaging quality, as shown in Tab. II. This section will discuss reconstruction algorithms under three common constraints, including partial occluder [8], [129], coherence [126] and polarizer [128]. Data-driven scene priors are another common constraint, which will be explained in Sec. IV.

1) *Partial occluder*: In the most primitive cameras, large-area obstructions can be used to form pinholes to tighten the beam and complete imaging [136]. In other early computational imaging applications, such as stereo vision [137], light field recovery [138], [139] and image synthesis [140], partial occlusion also played an important role. In the field of passive NLOS imaging, many state-of-the-art works also exploit partial occlusion. Among them, some tasks need to know or estimate the prior knowledge of occlusion (such as position and shape) before they can reconstruct hidden scenes using the prior as constraints [8]. Others only utilized partial occlusion to improve the conditioning of the problem without knowing its specific information [11], [121], [129], [130], [132], as illustrated in Fig 5-(a).

Passive NLOS imaging modelled by Eq. (12) can be solved as an optimal problem

$$\mathbf{I}_{p,\text{opt}} = \underset{\mathbf{I}_p}{\operatorname{argmin}} \frac{1}{2} \|\mathbf{A}\mathbf{I}_p - \mathbf{I}_\tau\|_2^2 + \Gamma(\mathbf{I}_p) \quad (13)$$

where Γ represents regularization terms, such as total variation (TV) or other sparsity constraints. When the position of the partial occlusion p is known, the optical transport matrix $\mathbf{A}$ can be estimated, after which the inverse problem can be solved through Eq. (13). The results of [8], a representative work using TV regularization, are shown in Fig. 5-(b). When the partially occluded position p cannot be obtained, the constraints at different times can also be used to estimate the optical transport matrix $\mathbf{A}$ and the corresponding hidden scene $\mathbf{I}_p$. For example, Aittala et al. performed matrix decomposition through an unsupervised learning method to complete passive NLOS imaging [121]. This is essentially similar to blind deconvolution [141]–[143], as discussed in [129].

2) *Polarizer*: Although partial occlusion is inevitable in many NLOS scenes, adding occlusion may still change the hidden scene. However, in practical applications, it is not the hidden scene but the imaging system that can be changed. A demonstrated alternative method is to add a polarizer in front of the camera, as shown in Fig. 5-(a). In this case, a

small angle difference between the light paths leads to a large intensity change, and the optical transport matrix $\mathbf{A}$ becomes [128]

$$A'(s, d) = A(s, d)\lambda(\omega_i, \omega_o, \mathbf{p})$$

where λ indicates the light leaking/blocking effect caused by the polarizer. ω_i, ω_o and $\mathbf{p}$ indicate viewing vector, incident vector and the polarizer axis, respectively. λ decreases the condition number of matrix $\mathbf{A}$, thereby improving the image quality.

Polarization-conditioned passive transport. Tanaka et al. showed that a camera-mounted polarizer can improve passive NLOS reconstruction by exploiting polarization-axis rotation along oblique indirect paths [128]. The added directional cue lowers the effective conditioning of the wall-to-hidden-scene transport matrix and improves recovery both with and without a known occluder, complementing computational periscopy without requiring a controllable active source.

3) *Coherence*: Three types of coherence, speckle coherence, spatial coherence and time coherence, have been used in passive non-line-of-sight imaging. Among them, speckle coherence does not require a special interferometer, but needs a narrowband incoherent light source as illumination. The speckle coherence model is based on the optical memory effect [124], which completes NLOS imaging through the scattering medium and corner objects by analyzing the coherence information between hidden object intensity and measured speckle

$$[\mathbf{I}_\tau \star \mathbf{I}_\tau](\theta) = [\mathbf{I}_p \star \mathbf{I}_p](\theta) \quad (14)$$

where $\star$ represents the autocorrelation operation. Using the phase recovery algorithm [144], [145], hidden object's diffraction-limited image $\mathbf{I}_\tau$ can be recovered from its autocorrelation [122]. The field of view of speckle autocorrelation imaging depends on the range of memory effect, which is generally very small. This is the bottleneck that limits the speckle correlation based on the memory effect.

Reconstruction algorithms based on spatial and temporal coherence are no longer subject to the viewing angle limitation caused by the optical memory effect [124], but require a very sensitive and costly interferometer. Since the interference effect is sensitive to the light source's number and size, spatial coherence and temporal coherence can usually only be used to complete the positioning, detection of discrete points, and very simple shape restoration. The combination of coherence and intensity information can effectively overcome this limitation. For example, multi-modal passive NLOS imaging that combines intensity information and spatial coherence can achieve promising results [126].

4) *Optimal Transport and Transport Modulation*: **Optimal transport formulation.** Going beyond standard ℓ_2 and TV regularization, Geng et al. formulated passive NLOS reconstruction as an optimal transport (OT) problem [134]. The method minimizes a Wasserstein-type distance between the predicted and measured light distributions on the relay wall, providing a geometrically meaningful and noise-robust objective. By casting the ill-posed passive measurement model

TABLE II
PASSIVE NLOS IMAGING

Ref	Illumination	Sensor	Information and constraints	Task
[10]	Incoherent light source (object side)	Conventional camera	Temporal coherence	Detection/ Tracking/ Identification
[122]	Incoherent light source (object side)	Conventional camera	Speckle coherence	2D reconstruction
[9]	Incoherent light source (object side)	Interferometer	Spatial coherence	Detection/ Tracking/ Identification
[126]	Ambient light	Interferometer + Conventional camera	Spatial coherence + Intensity	2D reconstruction
[8], [11], [121], [129]–[131]	Ambient light	Conventional camera	Intensity with partial occluder	2D reconstruction
[128]	Ambient light	Conventional camera	Intensity with polarizer	2D reconstruction
[132]	Ambient light	Conventional camera	Intensity of moving object	2D reconstruction
[132]	Ambient light	Conventional camera	Intensity	Detection/ Tracking/ Identification
[133]	Infrared radiation	Infrared camera	Infrared intensity	Detection/ Tracking/ Identification
[134]	Ambient/incoherent light	Conventional camera	Intensity via optimal transport	2D reconstruction
[135]	Ambient light	Conventional camera	Modulated light transport intensity	2D/3D reconstruction

(Eq. (12)) in the OT framework, the approach handles non-Gaussian measurement noise more gracefully than conventional least-squares methods. Validated on both synthetic and real passive NLOS scenes, the OT-based reconstruction yields measurably improved quality over TV-regularized baselines published in IEEE Transactions on Image Processing.

Light transport modulation. Zhang et al. proposed to improve passive NLOS reconstruction quality by modulating the light transport between the hidden scene and the relay surface [135]. Rather than treating the transport matrix $\mathbf{A}$ as fixed, the modulation strategy adaptively adjusts the imaging conditions to reduce the condition number of the inverse problem, thereby enabling more stable and accurate reconstruction from passive measurements captured with ordinary cameras. The method achieves state-of-the-art reconstruction performance on IEEE Transactions on Image Processing benchmarks.

5) Real-Time Passive NLOS Tracking: A practically important task for passive NLOS imaging is real-time tracking of moving persons. Wang et al. proposed PAC-Net (Propagate-and-Calibrate), a purely passive method that tracks a person walking in an invisible room by observing only a relay wall [146]. PAC-Net uses difference frames as carriers of temporal-local motion information and alternates propagation and calibration modules to leverage both dynamic and static cues at frame-level granularity. The authors also released NLOS-Track, the first large-scale dynamic passive NLOS tracking dataset containing thousands of video clips with corresponding trajectories, enabling systematic evaluation of passive NLOS tracking methods.

3D passive NLOS reconstruction has also advanced significantly. Czajkowski and Murray-Bruce demonstrated full-color, three-dimensional passive NLOS imaging with an ordinary camera by exploiting two orthogonal edges of an occluding structure for transverse resolution and an information-orthogonal scene representation for range resolution [147]. This work achieves accurate 3D reconstruction from inexpensive, ubiquitous hardware without calibration images, opening passive NLOS to practical indoor applications such as recon-

naissance and search-and-rescue.

6) Deep Learning: Data-driven scene priors are another common constraint, which can be exploited by deep learning methods. Although data-driven passive methods [77], [148], [149] also belong to passive NLOS imaging, this article will explain it in Sec. IV together with active data-driven NLOS methods to highlight the application of deep learning in this field. Besides, in Sec. IV, unsupervised passive NLOS imaging algorithms [121] based on physical constraints (matrix factorization) are also introduced.

D. Challenges and prospects

Because there is no controllable light source, passive NLOS imaging can only obtain intensity information and limited coherent information, leading to low reconstruction quality. The two main challenges for passive NLOS imaging are high ill-posedness and limited measurement.

1) Ill-posedness: Passive NLOS imaging is an extremely ill-posed problem. The reasons can be summarized as follows. (1) The collected data contains little effective information. Since most of the information collected by passive NLOS imaging is intensity information, it can be regarded as a projection of a hidden scene on a two-dimensional plane, without any available temporal information. (2) There is no effective space coding. The problem of passive NLOS imaging is somewhat similar to the recent lensless imaging, but there are no encoders such as moiré fringes [150], optical phased array [151] and known scattering medium [152], which results in the data collected on diffuse reflection surfaces (without valid BRDF encoding) being messy and the degree of ill-posedness being high. (3) The influence of ambient light. When there is ambient light, it is difficult to separate the ambient light from the effective speckle, which also leads to an increase in the ill-posedness [22].

Adding constraints. Adding constraints is an effective way to improve the condition. When the additional constrained parameters are unknown, accurate estimation of constrained parameters (such as the position and shape of partial occlusion)

can also improve the imaging effect. Besides partial occlusion [8], [129] and polarizer [128] discussed above, the data-driven methods have a good application prospect, which will be discussed in Sec. IV.

2) *Limited measurement*: In practical application scenes, adding appropriate constraints between the hidden object and the observation wall may not be allowed, which leads to the limitation of passive NLOS measurement. Therefore, passive NLOS imaging only exploiting intensity information is extremely challenging [8]. Existing research can obtain coherence through the interferometer, which contains some depth information but is limited by the shape and size of hidden objects and cannot complete high-quality reconstruction.

Multimodal measurements fusion Beckus et al. combined spatial coherence information and intensity information to complete multimodal passive NLOS imaging, which provides a path to improve the imaging quality [126]. The basic principle of passive NLOS imaging is to collect visible light emitted/reflected from hidden objects. However, in addition to visible light, hidden objects also emit/reflect electromagnetic waves on other wavelengths, such as infrared ($\sim 780nm$) and radio signals everywhere in the environment. On the other hand, NLOS imaging based on infrared wave [133] and radio [155] has also been explored in recent years. Therefore, if visible light can be fused with other types of electromagnetic waves to obtain multimodal measurement information, it will hopefully break through the bottleneck of passive NLOS imaging and achieve high-quality reconstruction without occlusion and scene constraint.

Spectral and Polarization Fusion. Building on multimodal measurement, recent works have leveraged spectral and polarization information as additional passive cues. Hyper-NLOS [127] and related multispectral approaches demonstrate that fusing across tens of spectral bands measurably improves reconstruction quality. On the polarization side, the PI-NLOS framework combines polarization imaging with long-wavelength infrared (LWIR) sensing to improve reconstruction under challenging lighting conditions, exploiting the geometric cues encoded in the polarization state of diffusely reflected light. Turning rough surfaces into relay surfaces is another recent direction: Li et al. showed that rough surfaces with mixed diffuse-specular reflectance can serve as NLOS relay surfaces by developing a modified light transport model that accounts for the specular component [156], greatly expanding the set of surfaces usable for NLOS sensing in uncontrolled environments.

IV. DEEP LEARNING METHODS

Conventional physics-based reconstruction algorithms have been discussed above. In recent years, with the successful application of data-driven algorithms (e.g., deep learning [157]) in blind deconvolution [158], depth estimation [159], and LOS imaging [160]–[162], recent works have also explored the possibility of deep learning in NLOS imaging. This section first explains the significance of using deep learning algorithms from a priori perspective, then introduces the end-to-end learning algorithms, as well as the hybrid algorithms that combine

deep learning with physical models. Finally, we discuss the challenges and prospects of deep learning algorithms. Table III summarizes the existing deep learning-based NLOS imaging technologies and their network, input, output, and training datasets.

A. Priors in NLOS imaging

Some priors have been effectively used in NLOS imaging, as reviewed below.

Non-negative prior. The non-negative prior includes two parts. First, for the optical transport matrix $\mathbf{A}$, by definition, the value of each element is non-negative; Second, for the reconstruction model based on the albedo ρ , the albedo of each voxel is also non-negative. The non-negativity of the light transport matrix and albedo ρ together constitute non-negative prior.

Sparsity prior. Since the measurement data only contains the surface information of the hidden scene, which is sparse in the entire 3D space, the albedo (target scene) ρ has a sparsity prior. A common sparse constraint is to directly use the L_1 -norm constrain, i.e., $\|\rho\|_1$, and [5] added different weights to each voxel. Another sparse constraint is a gradient constraint, which limits the gradient in the depth axis is sparse. The last type of sparsity constraint is that there should be only one non-zero value on the z-axis corresponding to each (x, y) coordinate [5]. Most NLOS reconstruction algorithms used sparse constraints as the main component of the regularization term $\Gamma(\rho)$ [41], [49].

Total variational (TV) prior. TV represents the sum of discrete gradients, and the TV regularization term is widely used in edge-preserving denoising [163], [164] and sparse reconstruction of low-sample data (e.g., compressed sensing) [165]. For 3D NLOS reconstruction, TV prior represents the sparsity of hidden objects, especially sparsity on the z-axis, which is the gradient constraint discussed above. For two-dimensional NLOS imaging, the TV prior is mainly to restore the image from the inverse problem and maintain the edge information. Due to the effectiveness of the total variation constraint, many NLOS imaging studies have used the TV prior as the regularization term [8], [16], [19], [128].

Other priors. The above three types of priors apply to most NLOS imaging problems. Besides, there are some priors suitable for specific NLOS imaging. Specifically, for ToF-based NLOS imaging, the ellipsoid constraint [1], [3], as well as the surface parameter constraint (e.g., the discontinuity of the ToF measurement contains the information of the surface normal) [46], [90] are two important priors. For NLOS imaging with partial occluders, the prior knowledge of the occluder's position and shape are also significant for high-quality reconstruction [12], [129]. Besides, the BRDF prior also plays an important role in improving imaging results [69].

1) *Unexploited prior – scene prior*: However, there are still some priors that have not been effectively used. Therefore, using this undeveloped prior information is a meaningful way to improve NLOS imaging quality.

TABLE III
NLOS IMAGING BASED ON DEEP LEARNING

Ref	Network	Input	Output	NLOS Scene	Train set
[148]	End-to-End: U-Net	Scattering image	2D Image	Ambient light + conventional camera like [8]	Experimental and synthetic data
[149]	End-to-End: a variant of the U-Net	Speckle image	2D Image	Incoherent light source + conventional camera like [122]	Experimental data
[72]	End-to-End: a variant of the U-Net	Scattering image	3D reconstruction	CW laser + conventional camera	Synthetic data
[17]	End-to-End: a variant of the U-Net	Transient images	3D reconstruction	pulsed laser + SPAD like [1]	Synthetic data
[77]	End-to-End: CNN/VAE	Scattering image	2D Localization/ identification/ reconstruction	Incoherent light source + conventional camera like [76]	Synthetic data
[62], [63]	End-to-End: CNN	Temporal histogram	Detection/ Identification/ Tracing	Pulsed laser + SPAD like [1]	Experimental data
[75]	End-to-End: ResNet	Steady image	Identification	CW laser + conventional camera like [72]	Synthetic data
[121]	Deep matrix factorization	Scattering image/ video	2D image/ video	Ambient light + conventional camera like [8]	Experimental data
[19]	Deep-inverse correlation	Speckle image	2D Image	CW laser + conventional camera like [72]	Synthetic data
[18]	Learned feature embeddings	Transient images	3D reconstruction	Pulsed laser + SPAD like [1]	Synthetic data
[71]	Learned feature embeddings	Depth and intensity images	3D reconstruction	Commercial LiDAR	Synthetic data
[64]	Physics-based deepRL framework	Transient images	Pose estimation	Pulsed laser + SPAD like [1]	Synthetic data
[153]	End-to-End: Parallel Encoder	Scattering image	2D Image	Ambient light + conventional camera	Synthetic data
[154]	End-to-End: Alternate R&R	Scattering image	2D reconstruction + recognition	Ambient light + conventional camera	Synthetic data

Scene priors is an important kind of unexploited priors, which includes both low-level features (e.g., smoothness) and high-level features (e.g., semantic information) of hidden scenes. Scene priors are particularly important for specific reconstruction tasks, such as NLOS imaging in autonomous vehicles or medical imaging. Compared with other priors, most scene priors are implicit and difficult to extract manually. Therefore, conventional physics-based methods are challenging to formulate and efficiently utilize these scene priors.

The data-driven methods based on deep learning can learn the input data distribution, thereby efficiently completing the mapping from the input space to the output space, which has been utilized in a wide range of applications in recent years. For NLOS imaging, if there is enough reliable data, the data-driven methods can learn the scene prior effectively and improve reconstruction quality. Moreover, although the data-driven methods take a long time in the training phase and require high-performance computing hardware, it can almost achieve real-time processing in the test phase, which helps improve the real-time performance of NLOS imaging.

Limited by datasets and generalization, data-driven NLOS imaging research is still in the early stage. In recent years, several studies utilized deep learning to propose innovative reconstruction algorithms. The existing works can be roughly divided into two categories. One is to exploit the powerful representation ability of deep learning to build an end-to-end neural network directly (Fig. 6-(a)). The other is to combine the advantages of deep learning with physical models' constraints to improve imaging performance (Fig. 6-(b)).

B. End-to-End algorithms

NLOS imaging can be expressed as an inverse problem, as shown in Eq. (7). Therefore, an end-to-end deep learning model can be built, where the input is the measurement (e.g., τ), and the output is the reconstruction of the hidden scene (e.g., $\hat{\rho}$). Then, a loss function is used to measure the difference between the output $\hat{\rho}$ and ground truth ρ , followed by back-propagation used to optimize the network weights, and finally, a good reconstruction result can be obtained.

Most of the existed NLOS imaging works based on deep learning used the end-to-end network structure, as reviewed in Tab. III. Chen et al. used conventional cameras and continuous laser illumination to collect steady-state NLOS imaging data and corresponding hidden scenes [72]. After that, a U-Net [166] based network was trained to complete the mapping from the measurement to the corresponding hidden scenes. In [72], the loss function was a multi-scale (for different resolutions) L_2 loss function. Similarly, [148] and [149] used the U-Net based network structure, with cross-entropy and ordinary L_2 norm as loss function to complete the passive NLOS imaging in Fig. 1-(c) and (d). They achieved better imaging performance than conventional methods [8], [128], as shown in Fig. 5-(b). For ToF-based transient NLOS imaging scenes, Chopite et al. synthesized a large number of training images through rendering and noise models, and modified part of the input and output in U-Net from 2D tensor to 3D tensor using L_2 loss [17]. Finally, based on the end-to-end deep neural network, [17] completed the mapping from transient measurement to depth map.

Direct NLOS photography. Most active transient methods optimize an intermediate hidden volume, depth map, or surface

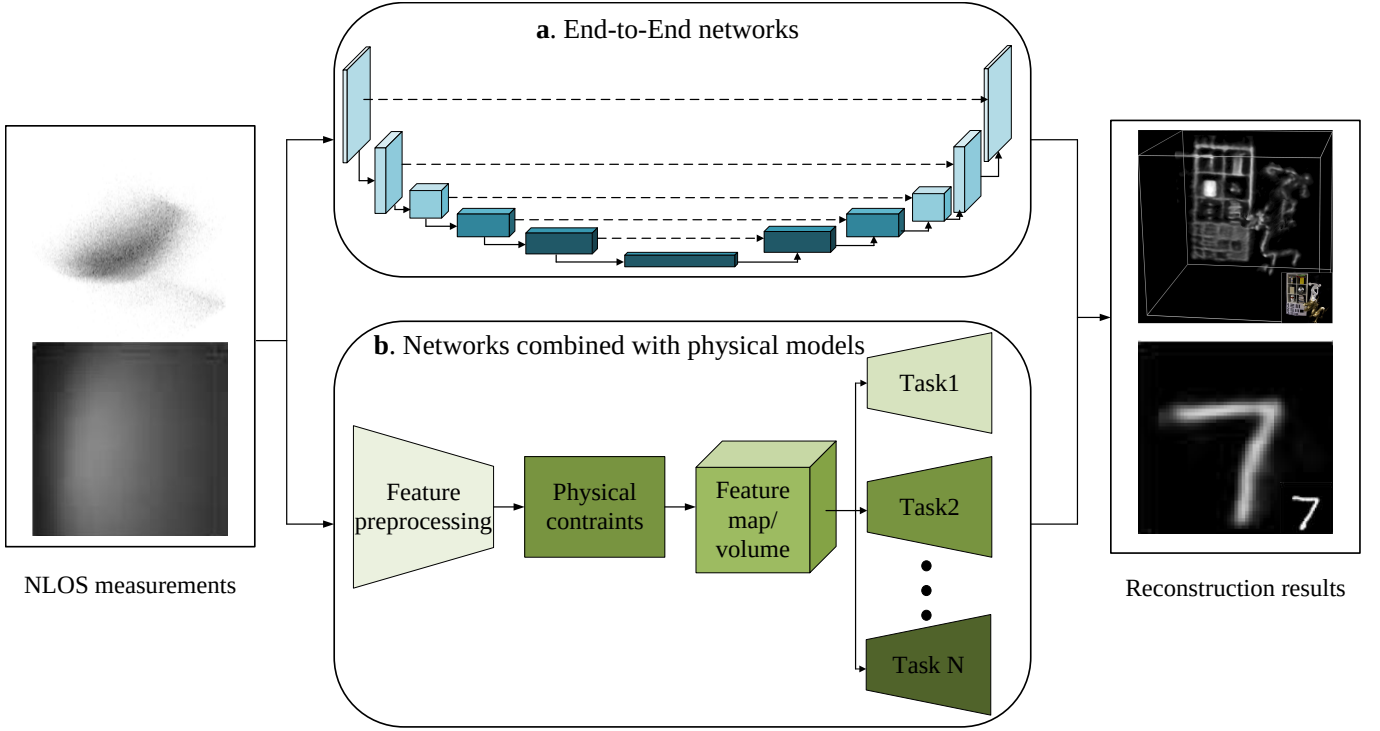


Fig. 6. Two types of models of NLOS imaging based on deep learning: (a) End-to-End Networks. (b) Physics-based Models. The reconstruction results in [18] and [148] are used as a demonstration.

before producing a human-interpretable image. Peng et al. instead formulated NLOS photography as direct synthesis of a two-dimensional view from the relay-wall viewpoint [167]. Their data-driven model maps measured transient transport directly to a high-resolution photograph, bypassing explicit three-dimensional geometry and allowing a relatively small training set. This change of target complements LCT, $f-k$, phasor-field, and neural-field reconstruction: it treats hidden texture and appearance as first-class outputs rather than secondary attributes of a recovered volume, anticipating later learned systems that optimize perceptual fidelity in addition to geometric accuracy.

In addition to reconstruction tasks, recognition is also an important goal in NLOS scenes. Due to the limited capability of conventional algorithms in high-level semantics, NLOS recognition mainly uses data-driven end-to-end algorithms based on deep learning. Lei et al. completed the recognition of MNIST [168] and human posture under different NLOS settings [75]. [62] showed that the deep neural network can classify and recognize hidden scenes with only one SPAD scanning point. In addition, a recent study [64] has combined LSTM [169] and physical models to complete 3D human pose estimation. Besides, Satat et al. used deep neural networks to complete object classification through scattering media [170]. For passive NLOS scenes, Tancik et al. utilized CNN for positioning and recognition, achieving a high recognition accuracy [77]. Besides, [77] also explored the use of variational autoencoder (VAE) [171] to complete NLOS reconstruction. Du et al. designed a parallel encoder architecture for passive NLOS reconstruction that simultaneously processes multi-scale spatial features of the passive scatter-

ing measurement, enabling improved reconstruction fidelity with lower computational overhead compared to single-path encoder designs [153]. For joint NLOS scene understanding, Wang et al. proposed NLOS-R 2, which alternates between reconstruction and recognition in a mutual-refinement loop: semantic predictions from the recognition branch feed back as structural priors to sharpen reconstruction, while the improved reconstruction in turn enhances recognition accuracy [154]. This alternate training strategy achieves superior performance on both reconstruction and recognition tasks simultaneously, demonstrated on IEEE ICME 2025.

C. Network combined with physical models

The end-to-end method is convenient for training, but it is highly dependent on the dataset. When the dataset scale is large enough, end-to-end learning can learn the mapping well to achieve good results. However, end-to-end learning may have problems such as over-fitting and poor generalization ability when the data size is insufficient. Due to the cumbersome data acquisition process, NLOS imaging lacks real large-scale datasets (most of the existing large-scale datasets are synthetic). Hence, some state-of-the-art studies in recent years proposed a reconstruction algorithm combining deep learning and physical models instead of the end-to-end network only, as shown in Tab. III.

Metzler et al. used the optical memory effect (see Sec. III-III-C) to complete NLOS imaging [19]. Instead of using conventional phase recovery algorithms (e.g., hybrid input-output (HIO) [144] and alternating minimization (Alt-Min) [172]), [19] adopted U-Net to complete phase recovery, with the L_1

norm after autocorrelation as loss function. **Shared learned representations for reconstruction and recognition.** Chen et al. introduced a learned feature-embedding framework that maps transient measurements into a common hidden-scene representation and then specializes it for high-resolution image reconstruction, classification, and 2.5D object detection [18]. Rather than relying on a monolithic U-Net, the architecture incorporates differentiable modules with explicit physical roles, including transient propagation, visibility reasoning, image rendering, and depth estimation. Training on synthetically rendered diffuse and specular scenes while evaluating on measured transients demonstrated useful synthetic-to-real generalization. This work marks an early shift from single-output NLOS inversion toward reusable, task-aware representations, anticipating later physics-guided multi-task networks, transient pretraining, and transformer/operator models. Another example of exploiting deep learning to promote the development of NLOS imaging is LiDAR-based imaging [71]. For traditional physical models, using commercial LiDAR as the equipment is still a very challenging problem. However, the recent work of Zhu et al. showed that by performing deep learning to complete feature extraction, LiDAR can be used to complete high-quality and robust 3D NLOS reconstruction [71].

Aittala et al. regarded the measurement data as the product of the hidden object and the light transport matrix [121] (as shown in Eq. (12)). Exploiting deep neural models to generate matrices satisfied matrix decomposition completes passive NLOS imaging based on unsupervised learning. [173] used unsupervised learning to complete active NLOS imaging. Specifically, [173] exploited multilayer perceptron layers (MLP) to construct a neural transient field that maps measurement data into a hidden scene, and utilized a physical model to constrain the results, thereby obtaining superior reconstruction results. Technically, such unsupervised learning methods [121], [173] are not data-driven methods, but the idea of using deep neural networks to simulate matrix factorization is instructive.

Recent works have significantly extended this paradigm of combining physical constraints with deep learning.

Learning from under-scanned transients. Dense relay-wall scanning remained a practical acquisition bottleneck even after analytic reconstruction became fast. Li et al. introduced the first deep pipeline designed specifically for under-scanning measurements, coupling a transient recovery network that maps sparse scans to a dense measurement grid with a volume reconstruction network that embeds the linear light-path transport operator [59]. Multi-kernel feature extraction and fusion recover measurement structure, while regularized constraints preserve local detail and suppress oversmoothing. The method remains effective for 8×8 confocal scans and reports approximately $50\times$ faster inference than an iterative under-scanning baseline. This work shifts learned active NLOS from post-reconstruction refinement toward joint measurement completion and physics-aware inversion, preceding later signal-superresolution, virtual-scanning, diffusion, and transient-transformer approaches.

Neural implicit surfaces. Extending the neural transient field (NeTF) [173] to surface representations, Fujimura et

al. proposed NLOS-NeuS [102], which represents the hidden scene as a neural implicit surface via a signed distance function (SDF). By introducing SDF constraints based on first-returning photon geometry and volume rendering, NLOS-NeuS reconstructs smooth and detailed 3D surfaces without voxel resolution limitations, representing a major step towards high-fidelity 3D NLOS scene understanding.

Learnable physical priors. Sun et al. introduced a framework with learnable physical priors [174], replacing manually designed fixed priors (such as single fixed path compensation) with adaptive priors learned from data. This enables significantly better generalization to diverse scene conditions and varying SNR levels, addressing the limited generalization capability that has been a persistent challenge for physics-based deep NLOS methods.

Diffusion model priors. Su et al. proposed a model-guided iterative diffusion sampling approach for NLOS reconstruction [32], where the physical forward model of NLOS imaging guides the diffusion sampling process to generate reconstructions that satisfy measurement constraints while leveraging the strong generative prior of a pre-trained diffusion model. This approach achieves state-of-the-art NLOS reconstruction quality, demonstrating that diffusion models are a powerful new tool for solving the NLOS inverse problem.

Plug-and-Play for dynamic NLOS. Ye et al. introduced a plug-and-play (PnP) framework for dynamic NLOS video reconstruction [175], incorporating a frequency-filtering step based on wave physics and a pre-trained deep neural network denoiser as an implicit prior. The flexible PnP structure allows easy integration of different denoisers and adapts to different NLOS imaging configurations, achieving superior temporal consistency over existing frame-by-frame reconstruction methods.

Unsupervised reconstruction from irregular measurements. Cui et al. proposed Virtual Scanning [113], an unsupervised framework for NLOS imaging from irregularly undersampled transients (IUT) that does not require paired training data. A virtual scanning process enables the network to learn within both the range and null spaces of the measurement operator, combined with a physics-guided SURE-based denoiser for robustness to noise. This method achieves higher fidelity and orders-of-magnitude faster inference than existing iterative solutions.

Aperture-limited diffusion and physics-guided high-speed reconstruction. TransDiff [176] extends unsupervised transient completion to aperture-limited relay surfaces using a latent diffusion prior constrained by the measured transients. In parallel, Physics to the Rescue [177] embeds wave-propagation and volume-rendering priors into a neural reconstruction pipeline, improving robustness when high-speed acquisition requires approximate light-transport models. Together, these methods mark a shift from purely data-driven inversion toward learned solvers whose latent completion is explicitly checked against transient physics.

Untrained network priors. Wu et al. demonstrated that an untrained deep decoder network can serve as an effective image prior for NLOS reconstruction without any training

data [178], leveraging the deep image prior inherent in the network architecture to regularize the ill-posed NLOS inverse problem, offering flexibility for novel experimental configurations where training data is unavailable.

D. Challenges and Prospects

NLOS imaging based on deep learning still faces many challenges, including lack of datasets, lockstep network structure, and limited generalization capability. Here, we discuss these three challenges and the corresponding prospects separately.

1) *Dataset*: Data-driven algorithms' performance largely depends on the dataset's quality (such as scale and reliability). However, for transient NLOS imaging, acquiring a sample of data requires a raster scan of the imaging area, which takes about 1 to 5 minutes [1], [110]. Therefore, constantly changing hidden objects and collecting tens of thousands of measurements to form a large-scale dataset is extremely difficult. For NLOS imaging scenes based on traditional cameras, although data collection is less time-consuming, it is still complicated to continuously change scenes and construct large-scale dataset because data augmentation operations such as crop and flip are not suitable for NLOS imaging.

Most existing works construct a rendering model to synthesize datasets for training, i.e., they first use public datasets in other fields as the hidden object (ground truth) and then synthesize measurement data through a rendering model. For transient NLOS imaging, the rendering model includes two parts: transient rendering and sensor model [17], [18]. The SPAD-based photon calculation model has been studied in detail, and they take into account factors such as noise, crosstalk and afterpulsing [179]. For other types of NLOS imaging, Metzler et al. used Berkeley Segmentation Dataset 500 [180] as a hidden scene to calculate autocorrelation, which is then used to train the phase recovery network [19]. For passive NLOS imaging using traditional cameras and ambient light, diffuse surface illumination models, such as the Phong Model [181], can be used for rendering to obtain synthesized passive NLOS data [148].

Due to the sensitivity of deep learning algorithms to abnormal data, improving the accuracy of rendering models is extremely important to data-driven NLOS imaging methods. Another alternative is designing an automated/real-time data collection system to collect data in the experimental setup.

Since 2022, dedicated NLOS rendering tools have emerged to generate higher-fidelity synthetic training data. Royo et al. presented the first NLOS transient renderer designed to accurately simulate light transport in NLOS scenarios, enabling generation of realistic training data and testing of reconstruction algorithms [182]. Plack et al. subsequently developed a fast differentiable transient renderer for NLOS scenes that supports automatic differentiation, enabling gradient-based optimization of scene parameters and end-to-end training of NLOS reconstruction networks [183]. For passive NLOS tracking, Wang et al. released the NLOS-Track dataset, the first large-scale dynamic passive NLOS tracking dataset with thousands of real and synthetic video clips paired with trajectory labels [146], addressing the severe data scarcity problem in passive NLOS research.

Complementing physically complete transient renderers with a benchmark-oriented alternative, Shi et al. introduced a configurable simulator grounded in the light-cone transform and accelerated by three-dimensional FFT convolution [184]. The framework accepts depth and optional albedo maps, exposes relay-wall extent, stand-off distance, temporal binning, detector jitter, and Poisson noise as explicit parameters, and releases transient data for seven ShapeNet object categories together with common LCT, phasor-field, $f-k$, and back-projection baselines. This development lowers the cost of standardized algorithm comparison and large-scale learning, while remaining complementary to Monte Carlo transient rendering when higher-order transport, complex materials, or full sensor realism are required.

2) *Network Architecture*: According to Sec. IV IV-B and IV-C, most NLOS imaging networks currently use the classic network structure (or with tiny changes), such as U-Net [166] and ResNet [185]. However, these well-known network structures are not necessarily suitable for NLOS imaging. Compared with recent works in other inverse problems, such as low-light image recovery [186] and image deblurring [187], networks designed for specific tasks achieve better results. Therefore, it can be expected that in the future, more novel network architectures based on the characteristics of NLOS imaging (e.g., [18]) will be proposed to improve the performance of NLOS imaging.

Since 2022, the NLOS community has indeed witnessed a wave of new architectures designed specifically for the challenges of 3D transient imaging.

Transformer-based networks. Li et al. proposed NLOST [28], the first transformer specifically designed for NLOS 3D reconstruction. NLOST uses spatial-temporal self-attention at multiple scales to capture both local and global correlations within the high-dimensional transient measurement volume, achieving superior performance on real-world confocal and non-confocal data. For NLOS videography, Li et al. developed TransiT [29], a transient transformer architecture that directly compresses the temporal dimension of input transients to extract features efficiently at high frame rates, combining feature fusion and spatial-temporal attention with transfer learning to bridge the synthetic-to-real gap.

State-space model (Mamba) for video NLOS. Li et al. proposed ST-Mamba [30], the first spatial-temporal Mamba model for dynamic NLOS reconstruction. ST-Mamba exploits the time-resolving causality in transient measurements through interleaved Mamba blocks, incorporating a wave-based loss function in the phasor field domain to handle measurement noise in NLOS video. This approach achieves superior temporal consistency across frames compared to per-frame reconstruction methods.

Graph neural networks. Su et al. proposed DG-NLOS [31], which employs a graph neural network (GNN) as its fundamental component to transform dense NLOS grid data into sparse structural features. DG-NLOS uses a dual-branch architecture with one branch dedicated to albedo recovery and another for depth/geometry, enabling simultaneous reconstruc-

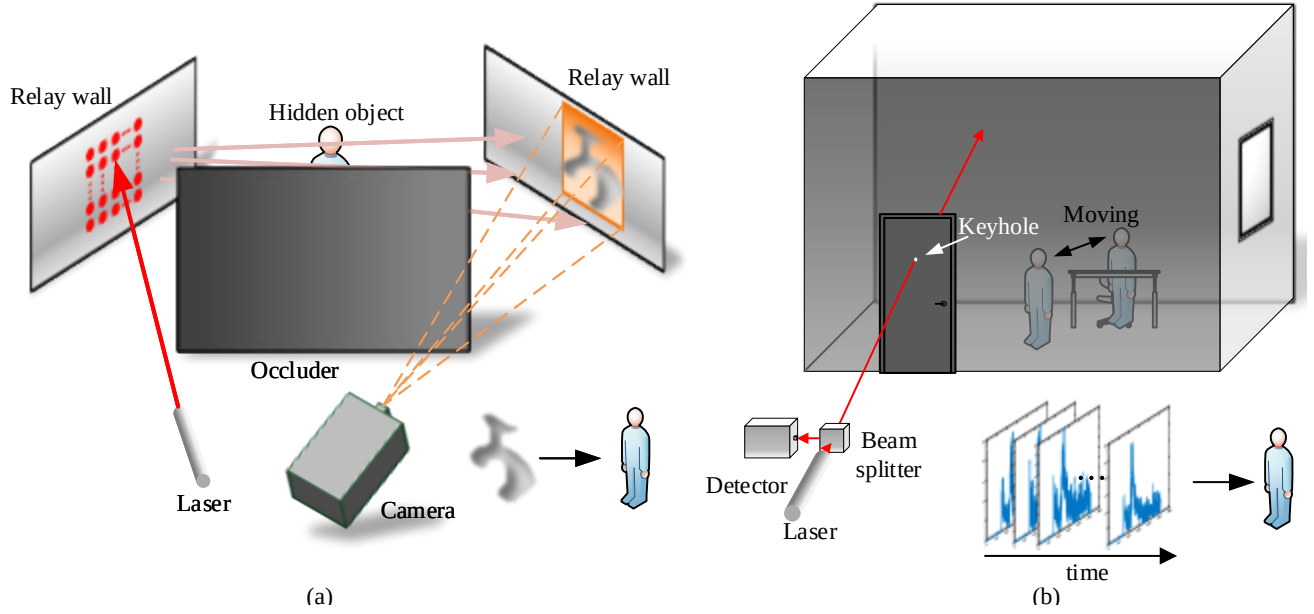


Fig. 7. New NLOS scenes. (a) Two bounce NLOS imaging. (b) Keyhole NLOS imaging.

tion of appearance and structure with reduced computational and memory cost. To the authors' knowledge, DG-NLOS is the first work to employ GNNs as a core module for NLOS reconstruction.

3) *Generalization*: Limited by the dataset and network structure discussed above, current data-driven NLOS imaging algorithms have limited generalization capabilities. [17] and [18] can get good test results on the public NLOS data [1], [188] through training on the synthetic training set, which means that they have a certain generalization ability. However, this does not mean that the generalization capabilities of current algorithms are sufficient. Faced with new parameters (such as BRDF, time jitter, aperture size) and new hidden scenes that do not exist in the training dataset, the trained network may not necessarily achieve acceptable results.

The most two direct ways to increase the generalization ability are improving the dataset's quality and the network structure, as discussed above. Another method is to use transfer learning so that a network trained on one kind of data can be quickly transferred to another kind of data. Besides, unsupervised learning is also a promising method. It does not rely on large amounts of data, but can use deep neural networks' powerful representation capabilities to train a model that meets the physical constraints (e.g., the optical transport matrix in [121]), which has more substantial generalization capabilities.

Recent advances have made meaningful progress on the generalization problem. Sun et al. proposed a framework with learnable physical priors [174] that adapts to diverse imaging conditions automatically, demonstrating substantially improved generalization across different SNR levels and scene configurations. Domain reduction strategies [101] that focus the reconstruction search space on the most likely hidden object locations also improve both speed and generalization. Transfer learning has been successfully applied in

TransiT [29] to bridge the synthetic-to-real domain gap for NLOS videography. Looking forward, the combination of physics-constrained learning, untrained priors [178], and self-supervised approaches [113] holds promise for enabling robust NLOS reconstruction even without large-scale real training data.

E. Dynamic NLOS Imaging

Real-time reconstruction of dynamic hidden scenes is one of the most practically significant challenges in NLOS imaging, and it has seen remarkable progress since 2022. The main bottleneck is that dense raster scanning limits the practical frame rate to well below real-time, creating a fundamental tension between acquisition density and temporal resolution.

Towards resolving this tension, several strategies have emerged. Ye et al. demonstrated real-time NLOS video at 4 fps for room-sized scenes by combining spectrum filtering (denoising/deblurring in the frequency domain) with an interleaved scanning scheme that computes high-resolution live video from low-quality sequences acquired during scanning [33]. Li et al. proposed ST-Mamba [30], which exploits temporal consistency across frames using spatial-temporal Mamba blocks and a wave-based phasor field loss to reconstruct high-resolution NLOS volumes from under-scanning transient videos. For videography with a transient transformer, TransiT [29] achieves 10 fps reconstruction at 64×64 resolution from 16×16 sparse transients captured at 0.4 ms exposure per point, demonstrating practical video NLOS reconstruction on real hardware. Ye et al. further developed a plug-and-play algorithm for dynamic NLOS video [175] that combines frequency-domain physics filtering with a deep denoiser prior, enabling flexible and high-quality reconstruction of moving hidden scenes.

V. NEW NLOS SCENES

In Sec. II-IV, most existing NLOS imaging studies have been introduced. These studies are accomplished in active and passive NLOS scenarios, as shown in Fig. 1. However, NLOS imaging is not limited to these scenes, and more new types of scenes are waiting to be developed. In this section, we take the recent two bounce NLOS imaging [20] and keyhole NLOS imaging [21] as examples to introduce potential new NLOS scenes and their prospects. We further summarize the 2022–2026 expansion of NLOS imaging into sparse and irregular active acquisition, active corner cameras, ptychographic depth-resolved NLOS, transient light-transport-matrix iteration, phasor-field enhancement under partial sampling, scattering-media robustness, few-prior passive transport estimation, low-cost LiDAR spatial reasoning, robotic navigation and exploration, radar/RF/mmWave sensing, passive electromagnetic-skin-aided radar imaging, acoustic and ultrasound sensing, terahertz waves, and semantic hidden-scene understanding.

A. Two bounce NLOS imaging

Henley et al. introduced the novel "two-bounce NLOS imaging", as shown in Fig. 7-(a) [20]. In this new scene, the hidden object is blocked by an occluder, but there are two diffuse reflection surfaces W_1 and W_2 on both sides of the hidden object. The observer can reconstruct the hidden scene by scanning the laser on one of the diffuse reflection surfaces (e.g., W_1) and using a traditional camera to capture the two-bounce light on the other reflection surface. In other NLOS imaging, hidden objects play a role in reflecting light. However, in two bounce NLOS imaging, hidden objects play a role in blocking light. By capturing the projection of light on W_2 after being blocked by a hidden object, whether there is a hidden object point in each voxel can be judged.

As discussed in [20], two bounce NLOS imaging can be applied to seeing behind trucks for autonomous vehicles and imaging between windows for search and rescue. These applications are extensions to traditional NLOS imaging (i.e., three-bounce NLOS imaging or passive NLOS imaging) applications and illustrate the broad application prospects of "turning walls into mirrors".

B. Two-Bounce NLOS: Role of Transients

Building on the two-bounce NLOS setup, Somasundaram et al. provided the first systematic analysis of the role of time-of-flight (transient) information in 2B-NLOS imaging under multiplexed illumination [189]. Their study quantifies the tradeoffs between temporal resolution, spatial resolution, and number of image captures, deriving formal mathematical constraints for 2B lidar and showing that transient information can significantly reduce the measurement requirements for shape reconstruction. This analytical framework provides design guidelines for future NLOS systems that incorporate time-gating in two-bounce configurations.

A complementary steady-state trajectory replaces binary shadow carving with a continuous learned scene

model. Zhang et al. introduced Neural Illumination Fields (NIF) [190], which jointly represents hidden-space density and illumination-dependent image formation with multilayer perceptrons and optimizes the representation through differentiable intensity rendering. Because NIF synthesizes measured shadow images directly, it avoids error-prone binary shadow segmentation and remains effective under low shadow contrast and ambient-light interference. This work shifts two-bounce NLOS from discrete occupancy carving toward self-supervised neural inverse rendering for large hidden volumes.

C. Keyhole Imaging

For all the NLOS imaging systems introduced above, there is a limitation that a large illumination/imaging area is required. However, in some NLOS scenes (e.g., hidden objects are blocked in a room with curtains), large imaging areas are not allowed, and only a few small holes can be used. Metzler et al. used a beam splitter to propose an imaging system similar to confocal NLOS but does not require scanning, called keyhole imaging, as shown in Fig. 7-(b) [21]. In this system, the pulsed laser and the time-resolved detector only use a small hole to illuminate and detect the hidden space. When the object in the hidden space moves with time, expectation-maximization can be used to complete the task of NLOS shape reconstruction and localization.

D. Active Corner Cameras

A newer line of work relaxes the need for dense multi-position illumination by turning a visible corner into a structured sensing device. Seidel et al. demonstrated an active corner camera that models the complete optical response of a visible corner and reconstructs both moving foreground objects and stationary hidden background geometry from NLOS snapshots. This direction is important because it moves NLOS imaging closer to deployed corner-mounted sensing: the system no longer only recovers a single isolated object, but can also maintain a background map of the hidden space while monitoring dynamic foreground changes.

E. Ptychographic NLOS Imaging

Most transient NLOS methods treat the relay wall as an approximately diffuse surface and rely on time-of-flight inversion. Song et al. introduced ptychographic NLOS imaging [191], which instead exploits coherent diffraction and coded ptychography for depth-resolved visualization of hidden objects. In this formulation, a laser spot is scanned on the relay wall, the returning object wavefields are modulated by the complex-valued wall profile, and the resulting diffraction patterns form a ptychogram. Recovering both the hidden objects at different depths and the wall modulation profile connects NLOS imaging to computational wavefront retrieval, suggesting a complementary route for high-resolution depth-aware hidden-scene imaging when coherent measurements and wall-profile modulation are available.

F. Transient Light-Transport-Matrix Iteration

Beyond reconstructing a hidden volume from a single measured transient light transport matrix (TLTM), Sultan et al. proposed iterating the TLTM itself [192]. By computationally focusing the measured first-order TLTM onto surfaces in the hidden scene, the relay surface can be treated as a second-order active imaging system. This viewpoint enables hidden-scene relighting, separation of direct and indirect transport inside the hidden space, and dual-photography-style operations. It is therefore not only another reconstruction method, but also a step toward programmable transient probing of hidden scenes when dense SPAD-array measurements make fuller TLTM acquisition feasible.

G. Sparse and Irregular Active NLOS Acquisition

Another important practical trajectory is the relaxation of dense rectangular relay scanning. Liu et al. introduced a Bayesian framework for NLOS imaging with arbitrary illumination and detection patterns [193]. By constructing virtual confocal signals and jointly regularizing the measured signal, virtual confocal signal, and hidden object, their CC-SOCR formulation reconstructs albedo and surface normals even when relay samples are sparse, fragmented, or geometrically irregular. A closely related few-shot extension [96] further emphasizes that the hidden target, the measured transient signal, and surface-based structure priors can be regularized in mixed dimensions, enabling high-quality reconstruction from very small confocal grids such as 5×5 measurements. Cho et al. take a complementary learning-based route with LEAP [194]: instead of directly reconstructing the hidden volume from noisy partial transients, the network predicts clean full-aperture phasor fields from partial measurements and constrains the learned representation to the informative frequency band of phasor-field propagation. This connects sparse acquisition, denoising, and learned measurement completion, showing that practical NLOS can reduce both sampling count and scan area without changing the downstream physical propagator. Together, these works bridge classical dense ToF NLOS and the newer arbitrary-relay / mobile-capture setting: they show that practical NLOS deployment depends not only on faster solvers, but also on inverse models that remain well posed when the relay surface is incomplete, irregular, or sparsely sampled.

H. Scattering-Media NLOS Imaging

Most active optical NLOS models assume that light propagates through free space and scatters only at surfaces. Luesia et al. study a harder regime in which the hidden scene is submerged in scattering media such as fog- or smoke-like volumetric transport [195]. By testing phasor-field reconstructions under controlled simulated scattering parameters and real diffuser measurements, the work clarifies how virtual-wave NLOS behaves when the relay path itself contains strong volumetric scattering. This direction is important for applications such as rescue, surveillance, and biomedical imaging, where NLOS systems may need to operate in optically degraded media rather than clean laboratory air.

I. Passive NLOS with Limited Prior Data

Passive NLOS reconstruction is especially sensitive to changes in relay surfaces, illumination, and detection geometry because the transport matrix is usually unknown and strongly scene-dependent. Gui et al. proposed a High-Dimensional Projection Selection (HDPS) framework for passive NLOS imaging with arbitrary scene conditions and detection patterns using only a small amount of prior data [196]. Instead of assuming that a full transport matrix is available or training a separate network for every transport condition, HDPS models the hidden target, projection, and transport relation through a high-dimensional manifold whose low-dimensional projections can be adapted to different passive NLOS settings. This work is relevant to the broader trend from calibrated laboratory passive NLOS toward deployable ordinary-camera systems that must adapt to new walls, illuminations, and detection layouts with limited calibration.

J. Radar-Based NLOS Imaging

Millimeter-wave (mmWave) radar offers a compelling alternative modality for NLOS sensing due to its ability to penetrate non-metallic obstacles, operate in adverse lighting conditions, and provide Doppler velocity information. Early radar NLOS works [197] demonstrated detection and tracking of hidden vehicles using Doppler radars in automotive scenarios. More recently, Lai et al. proposed HoloRadar [34], a practical system that achieves full 3D scene reconstruction (rather than mere detection and tracking) using a single mmWave radar mounted on a mobile robot. HoloRadar employs a two-stage pipeline: the first stage generates high-resolution multi-return range images capturing both line-of-sight (LOS) and NLOS reflections, and the second stage uses a physics-guided architecture that models mirror-image ray interactions to map NLOS reflections to their true locations. HoloRadar has been validated across diverse real-world indoor environments and represents a major step toward full NLOS 3D reconstruction in uncontrolled settings. The radar approach is complementary to optical NLOS: it operates through walls and in total darkness, but at lower spatial resolution than optical methods.

Du et al. extended radar NLOS from room-scale mmWave perception toward long-range X-band imaging [198]. Their system exploits the longer wavelength to make relay interactions predominantly specular and combines learned dense prediction with geometry-aware reconstruction to compensate for the low native spatial resolution of radar. Prototype experiments reconstruct hidden objects at distances up to 40 m, demonstrating that modality selection can change not only robustness but also the practical range envelope of NLOS imaging.

Recent RF/mmWave work further expands the meaning of NLOS perception beyond monostatic reconstruction. MITO [199] provides a multi-spectral mmWave dataset and simulation tool with both LOS and NLOS captures of everyday objects, lowering the barrier for learning-based mmWave NLOS perception. N²LoS studies tag-assisted mmWave NLOS localization, using a single backscatter tag to separate tag and environmental reflections in non-penetrable NLOS settings.

Backscatter-assisted indoor NLOS positioning [200] extends this branch from dedicated tag modulation toward passive asynchronous backscatter devices that act as virtual anchors for corridor-constrained user tracking, showing that low-power environmental tags can turn otherwise difficult multipath into useful NLOS localization evidence. Park et al. use camera-derived road layout to interpret mmWave radar point clouds for NLOS pedestrian localization at urban T-junctions, connecting around-corner radar perception to autonomous-driving scene understanding. NLOS-aided distributed MIMO/ISAC treats reconstructed NLOS multipath components as useful information for joint over-the-air synchronization and sparse off-grid environment imaging. Zhang et al. show that even higher-order double-bounce NLOS paths, often discarded as nuisance multipath, can improve snapshot radio SLAM and reveal landmarks that are unobservable from single-bounce paths alone. RIS-assisted around-corner radar uses a reconfigurable intelligent surface to steer RF energy into otherwise difficult NLOS regions and recover micro-Doppler signatures. A follow-on dual-beam RIS radar study [201] examines a lower-complexity one-bit quantized RIS configuration that produces dual symmetric beams, benchmarking the resulting beam steering and radar cross-section against metal reflectors and ideal single-beam RIS baselines. Passive or static metasurfaces provide another route: Torielli Bellini et al. study multi-view near-field NLOS radar imaging with non-reconfigurable electromagnetic skins [202], where a moving radar synthesizes an aperture over phase-configured passive modules that focus energy into the hidden region. Chen et al. further analyze RIS-aided NLOS bistatic MIMO radar with arbitrary electromagnetic-vector-sensor (EMVS) arrays [203], showing that polarization-rich EMVS measurements and PARAFAC-style factorization can resolve phase ambiguities even when sensor spacings exceed the conventional $\lambda/2$ limit. Newly identified adjacent RF works further show how engineered or naturally occurring reflectors can make hidden-space RF sensing more deployable: mmMirror [204] uses a Van-Atta-array IRS with commodity FMCW radars for device-free around-corner localization, while See and Beam [205] uses LiDAR-visible specular surfaces to infer NLOS mmWave reflection paths and localize NLOS users for beam steering. Together, these works suggest that future NLOS systems will not be limited to single-sensor hidden-shape reconstruction, but will also include localization, mapping, synchronization, dataset-driven representation learning, reflector-aware communication/sensing, passive backscatter infrastructure, higher-order radio-SLAM multipath exploitation, engineered static and reconfigurable metasurfaces, practical quantized RIS beam control, array-geometry design, and environment-aware radio perception.

Tornielli Bellini et al. push reflector-assisted RF NLOS imaging toward communication infrastructure by embedding a monostatic hidden-scene imaging mode into the initial-access beam sweep of a next-generation base station [206]. A low-cost non-reconfigurable modular reflector and imaging-specific codebook extend the standard communication beams; coherent processing across the resulting viewpoints forms an effective aperture for near-field reflectivity imaging, while a

maximum-likelihood velocity estimator compensates moving targets. By deriving resolution, aperture, latency, SNR, and communication–imaging trade-offs and validating the design experimentally, this work connects earlier electromagnetic-skin NLOS prototypes to standard-aware 6G ISAC deployment.

K. Acoustic NLOS Imaging

Acoustic waves provide yet another physically distinct modality for NLOS sensing. Similar to optical ToF systems, acoustic NLOS imaging exploits the time-of-flight of sound waves reflected off a relay surface. The Lindell et al. acoustic NLOS work [78] established that microphone arrays and audio sources can reconstruct hidden 3D scenes using the same algorithmic framework as optical NLOS. More recently, a synthetic aperture ultrasound NLOS imaging system has been demonstrated [35], operating in a frequency range similar to bat echolocation and achieving centimeter-scale depth resolution at distances up to 2 m from the scattering surface. By using a scanning ultrasound emitter and receiver, this system demonstrates high-resolution 3D reconstruction of multiple hidden targets and complex scenes. The spatial resolution of the acoustic system scales with the opening angle of the scattering surface rather than the sound wavelength, enabling sub-wavelength effective resolution. Acoustic NLOS imaging is particularly suited to scenarios where electromagnetic NLOS is impractical, such as underwater or through highly opaque materials.

The scope of acoustic NLOS has also moved beyond relay-surface reflection. Passive acoustic NLOS localization without a relay surface exploits knife-edge diffraction at doorways and corners to localize hidden sound sources. This relay-free setting is conceptually different from wall-reflection NLOS imaging and suggests that edge diffraction, rather than diffuse reflection alone, can be treated as an exploitable physical transport path for hidden-scene sensing.

L. Robotic Exploration with NLOS Perception

Most classical NLOS experiments focus on reconstructing a pre-defined hidden volume. In robotics, however, hidden perception is valuable because it can actively guide where the robot should move next. Young et al. studied single-photon-LiDAR NLOS sensing for autonomous navigation [207], combining multi-bounce histogram capture, hidden-region occupancy prediction, and a control module that lets a robot choose safer paths in an L-shaped corridor. This work is important because it evaluates NLOS not only by reconstruction fidelity, but by downstream navigation utility. SuperEx later integrates single-photon LiDAR NLOS sensing into indoor mapping and exploration. Instead of treating NLOS reconstruction as a standalone output, it uses timing histograms for NLOS empty-space carving and hidden-structure recovery, then feeds the recovered hidden-space information back into the exploration policy. Together, these works close the loop between NLOS perception and robotic decision making, making NLOS useful even when the reconstruction is partial or uncertain.

M. Low-Cost LiDAR NLOS Spatial Reasoning

A parallel 2026 trend is the use of consumer or low-cost LiDAR hardware for NLOS reasoning. Somasundaram et al. showed that hidden objects can be imaged with consumer LiDAR by using ego-motion to induce a synthetic sampling aperture [208]. DENALI [209] shifts the emphasis from hand-engineered inversion to large-scale data-driven spatial reasoning: it releases 72,000 real-world hidden-object scenes captured as space-time histograms from low-cost LiDARs, enabling models to learn NLOS cues directly from the multi-bounce returns that are usually discarded by consumer depth sensors. Together, these works indicate that mobile NLOS may develop along two complementary paths: physics-based reconstruction with motion-induced sampling, and dataset-driven perception from inexpensive histogram sensors.

N. Terahertz NLOS Imaging

Terahertz and sub-terahertz waves provide another route to around-obstacle perception. Cui and Trichopoulos showed that building surfaces can act as lossy mirrors for sub-THz signals, enabling hidden-object reconstruction by mirror-folding the propagation geometry around the obstacle. This modality sits between optical and RF NLOS: it has shorter wavelength and potentially higher spatial resolution than many RF systems, while still interacting with common environmental surfaces in a way that can be exploited for around-corner imaging.

O. NLOS Human Pose Estimation

Estimating 3D human poses of persons hidden around a corner is an example of semantic NLOS understanding beyond shape reconstruction. Isogawa et al. introduced an optical NLOS physics-based 3D human-pose-estimation pipeline that converts transient measurements into physically valid body-pose sequences. Although this direction remains less developed than geometric NLOS reconstruction, it illustrates an important path for future systems: hidden-scene perception should ultimately support semantic tasks such as human pose estimation, action recognition, and risk assessment, not only voxelized geometry recovery.

VI. CONCLUSION

In this paper, we have presented a comprehensive survey of non-line-of-sight (NLOS) imaging, covering the foundational physical models and algorithms established through 2021 and the significant advances made from 2022 to 2026. The field has matured substantially during this period, progressing from laboratory demonstrations with minute-long acquisition times to real-time video of dynamic room-sized scenes, and from a primarily optical inverse problem to a broader computational sensing paradigm spanning light, RF, sound, terahertz waves, and robotic perception.

Progress on fundamental challenges. The three core challenges identified in the 2021 survey—ill-posedness with low SNR, limited resolution, and long data acquisition time—have

all seen meaningful progress. On SNR, photon-efficient imaging [115] and first-photon event stamping [114] have demonstrated high-quality reconstruction at sub-photon-per-pixel levels. Resolution has been pushed to ~ 0.6 mm via active wavefront shaping (UNCOVER [87]), while picosecond-resolution up-conversion detection has shown that sub-millimeter axial resolution can also be pursued through extreme timing precision. Most dramatically, real-time 4 fps NLOS video of room-sized dynamic scenes has been demonstrated [33], and scan-free systems operating at up to 19 fps have been reported [116], fundamentally changing the prospects for practical NLOS deployment.

Deep learning advances. The deep learning component of NLOS imaging has seen a transformation in architecture diversity and sophistication. Beyond the U-Net and ResNet baselines of the 2021 era, the field has adopted transformers (NLOST [28], TransiT [29]), Mamba/state-space models for video [30], graph neural networks [31], and diffusion model priors [32]. Neural implicit surface representations (NLOS-NeuS [102]) have extended beyond voxel volumes to enable smooth 3D surface reconstruction. Recent works further broaden this trajectory: Time-Resolved Transformer studies photon-efficient LOS/NLOS transient 3D reconstruction with spatio-temporal attention; MARMOT introduces masked auto-encoder pretraining for transient/NLOS data; and NANO uses a noise-adapted neural operator to improve sparse and photon-starved reconstruction. Learnable physical priors [174], phasor-field enhancement under partial acquisition [194], and domain reduction strategies [101] have improved generalization, while unsupervised methods [113] and untrained network priors [178] have reduced dependence on large training datasets.

Forward models, rendering, and reconstruction infrastructure. A parallel trend is the improvement of the computational infrastructure around NLOS imaging. Dedicated NLOS rendering tools [182], [183] and real-world datasets such as NLOS-Track [146] have better supported training and evaluation. Newer tools such as mitransient extend this direction by bringing time-resolved, polarized, and differentiable transient light transport into Mitsuba 3, including NLOS scene setups and capture-noise modeling. On the reconstruction side, structure-sparsity regularization improves DLCT-style inversion under low-SNR conditions, while Quasi-Fresnel Transform and optimized FFT/NUFFT sampling strategies [58] explore lighter-weight and more flexible transient inversion. Sparse and irregular active acquisition has also become a central modeling issue: arbitrary illumination/detection reconstruction [193], few-shot signal-surface collaborative regularization [96], and LEAP [194] show how Bayesian virtual-confocal formulations, mixed-dimensional priors, and phasor-domain measurement completion can preserve reconstruction quality when the relay samples are incomplete, irregular, noisy, or very sparse. Ptychographic NLOS [191] adds a coherent wavefront-retrieval route by using relay-wall modulation and ptychographic diversity for depth-resolved hidden-object visualization. Iterating the transient light transport matrix [192] pushes this model-centric trajectory further by treating a measured relay-surface TLTM as a first-order system that

can be computationally focused into the hidden scene to obtain second-order transport, hidden-scene relighting, and dual-photography-style measurements. Complementing these method papers, the recent comparative ToF study by Marco et al. [210] is valuable because it places representative NLOS inverse models under a common forward-model and hardware-aware evaluation framework, clarifying which limitations arise from physics, capture geometry, photon counts, and algorithm-specific assumptions.

Passive NLOS advances. Passive NLOS imaging has progressed from simple 2D reconstruction with occluders to real-time passive tracking of moving persons (PAC-Net [146]) and full-color 3D passive NLOS imaging with ordinary cameras [147]. Hyperspectral and multispectral fusion (HyperNLOS [127]) and the exploitation of rough surfaces as relay surfaces [156] have broadened the environmental conditions and surface types compatible with passive NLOS sensing. Event-camera passive NLOS, represented by NLOS-ES and event-enhanced passive NLOS with physical embedding, shows that neuromorphic sensing can preserve fast motion cues that are difficult to capture with conventional frame cameras.

New modalities and scenes. Beyond optical NLOS, mmWave radar NLOS reconstruction (HoloRadar [34]) and ultrasound synthetic aperture NLOS imaging [35] have demonstrated full 3D scene reconstruction in non-optical modalities, enabling operation in darkness, through walls, and under conditions where optical methods fail. Optical NLOS itself is also moving beyond clean free-space propagation: scattering-media phasor-field analysis [195] studies how virtual-wave NLOS behaves when the hidden scene and relay path are affected by volumetric scattering. The latest frontier extends even further: GeRaF 2.0 studies RF/radar 3D reconstruction through boxes; RIS-assisted radar actively controls the RF propagation environment for around-corner sensing, while dual-beam RIS radar [201] studies the practical effect of one-bit quantized RIS beam control and reciprocal two-way scattering; passive non-reconfigurable electromagnetic skins [202] provide a lower-complexity metasurface route for multi-view near-field NLOS radar imaging; distributed MIMO/ISAC NLOS imaging uses NLOS multipath for joint synchronization and off-grid imaging; N²LoS explores tag-assisted mmWave NLOS localization; and terahertz NLOS uses lossy-mirror environmental reflections for around-obstacle imaging. Acoustic NLOS has also diversified from relay-surface reconstruction to relay-free passive acoustic localization via edge diffraction. In robotics, single-photon-LiDAR navigation work [207] and SuperEx connect NLOS measurements with indoor exploration and mapping, demonstrating that partial hidden-space information can be valuable even when it is used primarily for decision making rather than final-quality reconstruction.

Geometry, relay surfaces, and representation. The classical assumption of a planar diffuse relay wall is increasingly being relaxed. 3D Gaussian Transient Rendering models arbitrary relay surface geometries with differentiable transient rendering, while ptychographic NLOS [191], arbitrary illumination and detection patterns [193], scattering-media NLOS [195], and active corner-camera systems expand the range of feasible

acquisition layouts. In the RF regime, engineered reflectors such as RISs, Van-Atta-array IRSs, and static electromagnetic skins show that the propagation environment itself can become part of the sensing hardware. These developments suggest that future NLOS systems will be less tied to laboratory walls and more capable of exploiting real environmental geometry.

Remaining challenges and future directions. Despite remarkable progress, several important challenges remain open. (1) *Outdoor and strong ambient light operation*: most existing systems require controlled or low-ambient-light conditions. Coherent sensing approaches [120] and temporal gating designs [86] are promising, but robust outdoor operation at long range remains difficult. (2) *Large-scale real training data*: the gap between synthetic and real-world NLOS measurements continues to limit generalization. Automated data collection systems, more realistic rendering, and domain adaptation methods are needed. (3) *Non-Lambertian and complex relay surfaces*: most algorithms still assume diffuse relay walls; exploiting specular [156], non-planar surfaces [94], arbitrary relay geometries, and volumetric scattering media in a unified framework remains an open problem. (4) *End-to-end system integration*: bridging the gap between research demonstrations and practical deployed systems—handling calibration, robustness, and computational cost—is a critical next step. (5) *Semantic NLOS understanding*: going beyond shape reconstruction to semantic tasks such as human pose estimation, action recognition, and object identification in hidden scenes represents an important emerging frontier.

In summary, NLOS imaging has transitioned from a laboratory curiosity to a technology on the verge of practical deployment across multiple modalities and application domains. Continued progress on the challenges outlined above will be essential for realizing the transformative potential of seeing around corners.

REFERENCES

- [1] M. O’Toole, D. B. Lindell, and G. Wetzstein, “Confocal non-line-of-sight imaging based on the light-cone transform,” *Nature*, vol. 555, no. 7696, p. 338, 2018.
- [2] X. Liu, I. Guillén, M. La Manna, J. H. Nam, S. A. Reza, T. H. Le, D. Gutierrez, A. Jarabo, and A. Velten, “Non-line-of-sight imaging using phasor-field virtual wave optics,” *Nature*, vol. 572, no. 7771, pp. 620–623, August 2019.
- [3] A. Velten, T. Willwacher, O. Gupta, A. Veeraraghavan, M. G. Bawendi, and R. Raskar, “Recovering three-dimensional shape around a corner using ultrafast time-of-flight imaging,” *Nature communications*, vol. 3, p. 745, 2012.
- [4] V. Arellano, D. Gutierrez, and A. Jarabo, “Fast back-projection for non-line of sight reconstruction,” *Optics Express*, vol. 25, no. 10, pp. 11 574–11 583, May 2017.
- [5] F. Heide, L. Xiao, W. Heidrich, and M. B. Hullin, “Diffuse Mirrors: 3D Reconstruction from Diffuse Indirect Illumination Using Inexpensive Time-of-Flight Sensors,” in *2014 IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, 2014, pp. 3222–3229.
- [6] X. Liu, S. Bauer, and A. Velten, “Phasor field diffraction based reconstruction for fast non-line-of-sight imaging systems,” *Nature Communications*, vol. 11, no. 1, p. 1645, April 2020.
- [7] D. B. Lindell, G. Wetzstein, and M. O’Toole, “Wave-based non-line-of-sight imaging using fast f-k migration,” *ACM Trans. Graph. (SIGGRAPH)*, vol. 38, no. 4, p. 116, 2019.
- [8] C. Saunders, J. Murray-Bruce, and V. K. Goyal, “Computational periscopy with an ordinary digital camera,” *Nature*, vol. 565, no. 7740, pp. 472–475, January 2019.

- [9] M. Batarseh, S. Sukhov, Z. Shen, H. Gemar, R. Rezvani, and A. Dogariu, "Passive sensing around the corner using spatial coherence," *Nature Communications*, vol. 9, no. 1, p. 3629, December 2018.
- [10] J. Boger-Lombard and O. Katz, "Passive optical time-of-flight for non line-of-sight localization," *Nature Communications*, vol. 10, no. 1, p. 3343, December 2019.
- [11] S. W. Seidel, J. Murray-Bruce, Y. Ma, C. Yu, W. T. Freeman, and V. K. Goyal, "Two-Dimensional Non-Line-of-Sight Scene Estimation from a Single Edge Occluder," *arXiv*, June 2020.
- [12] C. Thrampoulidis, G. Shulkind, F. Xu, W. T. Freeman, J. H. Shapiro, A. Torralba, F. N. C. Wong, and G. W. Wornell, "Exploiting occlusion in non-line-of-sight active imaging," 2017, arXiv:1711.06297. [Online]. Available: <https://arxiv.org/abs/1711.06297>
- [13] X. Liu, S. Bauer, and A. Velten, "Analysis of feature visibility in non-line-of-sight measurements," in *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, 2019, pp. 10 140–10 148.
- [14] J.-T. Ye, X. Huang, Z.-P. Li, and F. Xu, "Compressed sensing for active non-line-of-sight imaging," *Optics Express*, vol. 29, no. 2, p. 1749, January 2021.
- [15] C. Jin, M. Tang, L. Jia, X. Tian, J. Yang, K. Qiao, and S. Zhang, "Scannerless non-line-of-sight three dimensional imaging with a 32x32 SPAD array," *arXiv:2011.05122 [physics]*, November 2020.
- [16] C. Wu, J. Liu, X. Huang, Z.-P. Li, C. Yu, J.-T. Ye, J. Zhang, Q. Zhang, X. Dou, V. K. Goyal, F. Xu, and J.-W. Pan, "Non-line-of-sight imaging over 1.43 km," *Proceedings of the National Academy of Sciences*, vol. 118, no. 10, March 2021.
- [17] J. G. Chopite, M. B. Hullin, M. Wand, and J. Iseringhausen, "Deep Non-Line-of-Sight Reconstruction," in *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, 2020.
- [18] W. Chen, F. Wei, K. N. Kutulakos, S. Rusinkiewicz, and F. Heide, "Learned feature embeddings for non-line-of-sight imaging and recognition," *ACM Transactions on Graphics*, vol. 39, no. 6, pp. 230:1–230:18, December 2020, proceedings of ACM SIGGRAPH Asia 2020. [Online]. Available: <https://doi.org/10.1145/3414685.3417825>
- [19] C. A. Metzler, F. Heide, P. Rangarajan, M. M. Balaji, A. Viswanath, A. Veeraraghavan, and R. G. Baraniuk, "Deep-inverse correlography: Towards real-time high-resolution non-line-of-sight imaging," *Optica*, vol. 7, no. 1, pp. 63–71, 2020.
- [20] C. Henley, T. Maeda, T. Swedish, and R. Raskar, "Imaging Behind Occluders Using Two-Bounce Light," in *ECCV 2020*, vol. 12374, Cham, 2020, pp. 573–588.
- [21] C. A. Metzler, D. B. Lindell, and G. Wetzstein, "Keyhole Imaging: Non-Line-of-Sight Imaging and Tracking of Moving Objects Along a Single Optical Path," *IEEE Transactions on Computational Imaging*, vol. 7, pp. 1–12, 2021.
- [22] T. Maeda, G. Satat, T. Swedish, L. Sinha, and R. Raskar, "Recent advances in imaging around corners," *arXiv preprint arXiv:1910.05613*, 2019.
- [23] D. Faccio, A. Velten, and G. Wetzstein, "Non-line-of-sight Imaging," *Nature Reviews Physics*, vol. 2, no. 6, pp. 318–327, June 2020.
- [24] D. B. Lindell and G. Wetzstein, "Three-dimensional imaging through scattering media based on confocal diffuse tomography," *Nature Communications*, vol. 11, no. 1, p. 4517, December 2020. [Online]. Available: <http://www.nature.com/articles/s41467-020-18346-3>
- [25] J. Bertolotti, E. G. Van Putten, C. Blum, A. Lagendijk, W. L. Vos, and A. P. Mosk, "Non-invasive imaging through opaque scattering layers," *Nature*, vol. 491, no. 7423, pp. 232–234, 2012.
- [26] J. Zhao, F. Gramuglia, P. Keshavarzian *et al.*, "A gradient-gated SPAD array for non-line-of-sight imaging," *IEEE Journal of Selected Topics in Quantum Electronics*, vol. 29, no. 2, pp. 1–11, 2023.
- [27] Y. Feng, X. Cui, Y. Meng, X. Yin, K. Zou, Z. Hao, J. Yang *et al.*, "Non-line-of-sight imaging at infrared wavelengths using a superconducting nanowire single-photon detector," *Optics Express*, vol. 31, no. 7, pp. 11 116–11 126, 2023.
- [28] Y. Li, J. Peng, J. Ye, Y. Zhang, F. Xu, and Z. Xiong, "NLOST: Non-line-of-sight imaging with transformer," in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 2023, pp. 13 313–13 322.
- [29] R. Li, S. Shen, S. Xia, Z. Wang, X. Peng, C. Song, Y. Zhu, T. Wu, S. Li, and J. Yu, "Transit: Transient transformer for non-line-of-sight videography," in *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*, 2025, pp. 27 542–27 551. [Online]. Available: <https://arxiv.org/abs/2503.11328>
- [30] Y. Li, Y. Sun, S. Sun, J. Ye, Y. Zhang, F. Xu, and Z. Xiong, "Toward dynamic non-line-of-sight imaging with mamba enforced temporal consistency," in *Advances in Neural Information Processing Systems (NeurIPS)*, 2024.
- [31] X. Su, T. Zhu, L. Liu, Z. Chen, Y. Zhang, S. Li, J. Ye, F. Xu, and X. Yuan, "Dual-branch graph feature learning for nlos imaging," 2025. [Online]. Available: <https://arxiv.org/abs/2502.19683>
- [32] X. Su, Y. Hong, J. Ye, F. Xu, and X. Yuan, "Model-guided iterative diffusion sampling for NLOS reconstruction," *IEEE Journal of Selected Topics in Signal Processing*, vol. 18, no. 6, pp. 1009–1021, 2024.
- [33] J. Ye, Y. Sun, W. Li, J. Zeng, Y. Hong, Z. Li *et al.*, "Real-time non-line-of-sight computational imaging using spectrum filtering and motion compensation," *Nature Computational Science*, vol. 4, pp. 367–378, 2024.
- [34] H. Lai, Z. Lan, and M. Zhao, "Non-line-of-sight 3D reconstruction with radar," in *Advances in Neural Information Processing Systems (NeurIPS)*, 2025.
- [35] others, "Ultrasound synthetic aperture non-line-of-sight imaging," *Communications Physics*, vol. 8, p. 103, 2025.
- [36] Z. Xiao, C. Dai, R. Ye, J. Zeng, W. Li, and F. Xu, "Non-line-of-sight human pose estimation," *Optics and Lasers in Engineering*, vol. 184, p. 108573, 2026.
- [37] Y. Zhou, W. Li, W. Li, X. Huang, C. Dai, F. X. Li *et al.*, "Non-line-of-sight single-pixel imaging using polarization speckle modulation," *Physical Review Letters*, vol. 136, p. 083801, 2026.
- [38] O. Gupta, T. Willwacher, A. Velten, A. Veeraraghavan, and R. Raskar, "Reconstruction of hidden 3D shapes using diffuse reflections," *Optics express*, vol. 20, no. 17, pp. 19 096–19 108, 2012.
- [39] M. Buttafava, J. Zeman, A. Tosi, K. Eliceiri, and A. Velten, "Non-line-of-sight imaging using a time-gated single photon avalanche diode," *Optics express*, vol. 23, no. 16, pp. 20 997–21 011, 2015.
- [40] M. Laurenzis, J. Klein, E. Bacher, and N. Metzger, "Multiple-return single-photon counting of light in flight and sensing of non-line-of-sight objects at shortwave infrared wavelengths," *Optics Letters*, vol. 40, no. 20, p. 4815, October 2015.
- [41] F. Heide, M. O'Toole, K. Zang, D. Lindell, S. Diamond, and G. Wetzstein, "Non-line-of-sight Imaging with Partial Occluders and Surface Normals," *ACM Transactions on Graphics*, November 2017.
- [42] C. Jin, J. Xie, S. Zhang, Z. Zhang, and Y. Zhao, "Reconstruction of multiple non-line-of-sight objects using back projection based on ellipsoid mode decomposition," *Optics express*, vol. 26, no. 16, pp. 20 089–20 101, 2018.
- [43] M. L. Manna, F. Kine, E. Breitbach, J. Jackson, T. Sultan, and A. Velten, "Error Backprojection Algorithms for Non-Line-of-Sight Imaging," *IEEE Transactions on Pattern Analysis and Machine Intelligence*, pp. 1–1, 2018.
- [44] C.-Y. Tsai, A. C. Sankaranarayanan, and I. Gkioulekas, "Beyond volumetric albedo – a surface optimization framework for non-line-of-sight imaging," in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*. IEEE/CVF, June 2019, pp. 1545–1555. [Online]. Available: https://openaccess.thecvf.com/content_CVPR_2019/html/Tsai_Beyond_Volumetric_Albedo_-_A_Surface_Optimization_Framework_for_Non-Line-Of-Sight_CVPR_2019_paper.html
- [45] A. Pediredla, A. Dave, and A. Veeraraghavan, "SNLOS: Non-line-of-sight Scanning through Temporal Focusing," in *2019 IEEE International Conference on Computational Photography (ICCP)*, May 2019, pp. 1–13.
- [46] S. Xin, S. Nousias, K. N. Kutulakos, A. C. Sankaranarayanan, S. G. Narasimhan, and I. Gkioulekas, "A Theory of Fermat Paths for Non-Line-of-Sight Shape Reconstruction," in *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, June 2019.
- [47] G. Musarra, A. Lyons, E. Conca, Y. Altmann, F. Villa, F. Zappa, M. J. Padgett, and D. Faccio, "Non-line-of-sight 3d imaging with a single-pixel camera," 2019. [Online]. Available: <https://arxiv.org/abs/1903.04812>
- [48] B. Ahn, A. Dave, A. Veeraraghavan, I. Gkioulekas, and A. C. Sankaranarayanan, "Convolutional approximations to the general non-line-of-sight imaging operator," in *The IEEE International Conference on Computer Vision (ICCV)*, October 2019.
- [49] S. I. Young, D. B. Lindell, B. Girod, D. Taubman, and G. Wetzstein, "Non-line-of-sight surface reconstruction using the directional light-cone transform," in *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, 2020.
- [50] J. Iseringhausen and M. B. Hullin, "Non-line-of-sight reconstruction using efficient transient rendering," *ACM Transactions on Graphics*, vol. 39, no. 1, January 2020. [Online]. Available: <https://doi.org/10.1145/3368314>
- [51] M. L. Manna, J.-H. Nam, S. A. Reza, and A. Velten, "Non-line-of-sight-imaging using dynamic relay surfaces," *Opt. Express*, vol. 28, no. 4, pp. 5331–5339, February 2020.

- [52] M. Isogawa, D. Chan, Y. Yuan, K. M. Kitani, and M. O'Toole, "Efficient non-line-of-sight imaging from transient sinograms," in *Computer Vision – ECCV 2020*, 2020, 16th European Conference on Computer Vision (ECCV). [Online]. Available: <https://arxiv.org/abs/2008.02787>
- [53] J. Wu, C. Yu, J.-W. Zeng, C. Dai, F. Xu, and J. Zhang, "Miniaturized time-correlated single-photon counting module for time-of-flight non-line-of-sight imaging applications," *Review of Scientific Instruments*, vol. 95, no. 3, p. 035107, 2024. [Online]. Available: <https://doi.org/10.1063/5.0193824>
- [54] X. Liu, L. Wang, J. Liu, Y. Wang, and Y. Duan, "Geometric constrained non-line-of-sight imaging," *arXiv preprint arXiv:2503.17992*, 2025. [Online]. Available: <https://arxiv.org/abs/2503.17992>
- [55] J. Grau, M. Plack, P. Haehn, M. Weinmann, and M. Hullin, "Occlusion fields: An implicit representation for non-line-of-sight surface reconstruction," *arXiv preprint arXiv:2203.08657*, 2022. [Online]. Available: <https://arxiv.org/abs/2203.08657>
- [56] K. Choi, I. Kim, D. Choi, J. Marco, D. Gutiérrez, and M. H. Kim, "Self-calibrating, fully differentiable nlos inverse rendering," in *SIGGRAPH Asia 2023 Conference Papers*. New York, NY, USA: Association for Computing Machinery, 2023. [Online]. Available: <https://doi.org/10.1145/3610548.3618140>
- [57] C. Gu, T. Sultan, K. Masumnia-Bisheh, L. Waller, and A. Velten, "Fast non-line-of-sight imaging with non-planar relay surfaces," in *2023 IEEE International Conference on Computational Photography (ICCP)*. IEEE, 2023, pp. 1–12. [Online]. Available: <https://doi.org/10.1109/ICCP56744.2023.10233262>
- [58] T. Sultan, A. Bocchieri, C. Gu, X. Liu, P. Polynkin, and A. Velten, "Optimized sampling for non-line-of-sight imaging using modified fast fourier transforms," *arXiv preprint arXiv:2501.05244*, 2025. [Online]. Available: <https://arxiv.org/abs/2501.05244>
- [59] Y. Li, Y. Zhang, J. Ye, F. Xu, and Z. Xiong, "Deep non-line-of-sight imaging from under-scanning measurements," in *Advances in Neural Information Processing Systems*, vol. 36. Curran Associates, Inc., 2023, pp. 59 095–59 106. [Online]. Available: https://proceedings.neurips.cc/paper_files/paper/2023/hash/b91cc0a242e6518ee731f74e82b2eebd-Abstract-Conference.html
- [60] F. Xu, G. Shulkind, C. Thrampoulidis, J. H. Shapiro, A. Torralba, F. N. C. Wong, and G. W. Wornell, "Revealing hidden scenes by photon-efficient occlusion-based opportunistic active imaging," *Optics Express*, vol. 26, no. 8, pp. 9945–9961, 2018. [Online]. Available: <https://doi.org/10.1364/OE.26.009945>
- [61] S. Chan, R. E. Warburton, G. Gariepy, J. Leach, and D. Faccio, "Non-line-of-sight tracking of people at long range," *Optics Express*, vol. 25, no. 9, pp. 10 109–10 117, May 2017.
- [62] P. Caramazza, A. Bocolini, D. Buschek, M. Hullin, C. Higham, R. Henderson, R. Murray-Smith, and D. Faccio, "Neural network identification of people hidden from view with a single-pixel, single-photon detector," *Scientific reports*, vol. 8, no. 1, p. 11945, 2018.
- [63] G. Musarra, P. Caramazza, A. Turpin, A. Lyons, C. F. Higham, R. Murray-Smith, and D. Faccio, "Detection, identification, and tracking of objects hidden from view with neural networks," in *Advanced Photon Counting Techniques XIII*, vol. 10978. International Society for Optics and Photonics, May 2019, p. 1097803.
- [64] M. Isogawa, Y. Yuan, M. O'Toole, and K. M. Kitani, "Optical Non-Line-of-Sight Physics-Based 3D Human Pose Estimation," in *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, 2020, pp. 7013–7022.
- [65] J. H. Nam, E. Brandt, S. Bauer, X. Liu, M. Renna, A. Tosi, E. Sifakis, and A. Velten, "Low-latency time-of-flight non-line-of-sight imaging at 5 frames per second," *Nature Communications*, vol. 12, p. 6526, 2021. [Online]. Available: <https://doi.org/10.1038/s41467-021-26721-x>
- [66] G. Gariepy, F. Tonolini, R. Henderson, J. Leach, and D. Faccio, "Detection and tracking of moving objects hidden from view," *Nature Photonics*, vol. 10, no. 1, pp. 23–26, January 2016.
- [67] F. Willomitzer, F. Li, P. Rangarajan, and O. Cossairt, "Non-line-of-sight imaging using superheterodyne interferometry," in *Imaging and Applied Optics 2018 (3D, AO, AIO, COSI, DH, IS, LACSEA, LS&C, MATH, pcAOP)*, ser. Imaging and Applied Optics 2018 (3D, AO, AIO, COSI, DH, IS, LACSEA, LS&C, MATH, pcAOP). Optical Society of America, 2018, p. CM2E.1.
- [68] S. A. Reza, M. La Manna, S. Bauer, and A. Velten, "Phasor field waves: A Huygens-like light transport model for non-line-of-sight imaging applications," *Optics Express*, vol. 27, no. 20, p. 29380, September 2019.
- [69] A. Kadambi, H. Zhao, B. Shi, and R. Raskar, "Occluded imaging with time-of-flight sensors," *ACM Transactions on Graphics (ToG)*, vol. 35, no. 2, pp. 1–12, 2016.
- [70] M. Caligiuri, A. Simonetto, and P. Zanuttigh, "NIGHT – non-line-of-sight imaging from indirect time of flight data," in *European Conference on Computer Vision Workshops (MELEX)*, 2024, ECCV 2024 MELEX Workshop. [Online]. Available: <https://arxiv.org/abs/2403.19376>
- [71] D. Zhu and W. Cai, "Fast non-line-of-sight imaging with two-step deep remapping," 2021. [Online]. Available: <https://arxiv.org/abs/2101.10492>
- [72] W. Chen, S. Daneau, F. Mannan, and F. Heide, "Steady-state Non-Line-of-Sight Imaging," in *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, 2019.
- [73] J. Klein, C. Peters, J. Martín, M. Laurenzis, and M. B. Hullin, "Tracking objects outside the line of sight using 2D intensity images," *Scientific reports*, vol. 6, p. 32491, 2016.
- [74] B. M. Smith, M. O'Toole, and M. Gupta, "Tracking multiple objects outside the line of sight using speckle imaging," in *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, 2018, pp. 6258–6266.
- [75] X. Lei, L. He, Y. Tan, K. X. Wang, X. Wang, Y. Du, S. Fan, and Z. Yu, "Direct object recognition without line-of-sight using optical coherence," 2019. [Online]. Available: <https://arxiv.org/abs/1903.07705>
- [76] S. Chandran and S. Jayasuriya, "Adaptive Lighting for Data-Driven Non-Line-of-Sight 3D Localization and Object Identification," *arXiv:1905.11595 [cs, eess]*, July 2019.
- [77] M. Tancik, G. Satat, and R. Raskar, "Flash photography for data-driven hidden scene recovery," *CoRR*, vol. abs/1810.11710, 2018.
- [78] D. B. Lindell, G. Wetzstein, and V. Koltun, "Acoustic non-line-of-sight imaging," in *2019 IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, ser. Proc. CVPR, 2019.
- [79] B. Wang, M.-Y. Zheng, J.-J. Han, X. Huang, X.-P. Xie, F. Xu, Q. Zhang, and J.-W. Pan, "Non-line-of-sight imaging with picosecond temporal resolution," *Physical Review Letters*, vol. 127, no. 5, p. 053602, 2021.
- [80] R. Raskar and J. Davis, "5d time-light transport matrix: What can we reason about scene properties?" *MIT Technical Report*, p. 7, 2008.
- [81] A. Kirmani, T. Hutchison, J. Davis, and R. Raskar, "Looking around the corner using ultrafast transient imaging," *International journal of computer vision*, vol. 95, no. 1, pp. 13–28, 2011.
- [82] H. Shiraga, N. Miyanaga, M. Heya, M. Nakasuji, Y. Aoki, H. Azechi, T. Yamanaka, and K. Mima, "Ultrafast two-dimensional x-ray imaging with x-ray streak cameras for laser fusion research," *Review of scientific instruments*, vol. 68, no. 1, pp. 745–749, 1997, publisher: American Institute of Physics.
- [83] P. Zhou, "Research on InGaAs/InP Single Photon Avalanche Diode Based Infrared Single Photon Detection," Ph.D. Thesis, Harbin Institute of Technology, 2010.
- [84] C. Pei, A. Zhang, Y. Deng, F. Xu, J. Wu, D. U.-L. Li, H. Qiao, L. Fang, and Q. Dai, "Dynamic non-line-of-sight imaging system based on the optimization of point spread functions," *Optics Express*, vol. 29, no. 20, p. 32349, September 2021. [Online]. Available: <https://www.osapublishing.org/abstract.cfm?URI=oe-29-20-32349>
- [85] J. Rapp, C. Saunders, J. Tachella, J. Murray-Bruce, Y. Altmann, J.-Y. Tournet, S. McLaughlin, R. M. A. Dawson, F. N. C. Wong, and V. K. Goyal, "Seeing around corners with edge-resolved transient imaging," *Nature Communications*, 2020. [Online]. Available: <https://doi.org/10.1038/s41467-020-19727-4>
- [86] S. Riccardò, E. Conca, V. Sesta, A. Velten, A. Tosi *et al.*, "Fast-gated 16×16 SPAD array with 16 on-chip 6-ps time-to-digital converters for non-line-of-sight imaging," *IEEE Sensors Journal*, vol. 22, no. 22, pp. 21 564–21 574, 2022.
- [87] R. Cao, F. de Goumoens, B. Blochet, J. Xu, and C. Yang, "High-resolution non-line-of-sight imaging employing active focusing," *Nature Photonics*, vol. 16, pp. 462–468, 2022. [Online]. Available: <https://www.nature.com/articles/s41566-022-01009-8>
- [88] I. Gkioulekas, A. Levin, F. Durand, and T. Zickler, "Micron-scale light transport decomposition using interferometry," *ACM Transactions on Graphics (ToG)*, vol. 34, no. 4, pp. 1–14, 2015, publisher: ACM New York, NY, USA.
- [89] J. Arlt, D. Tyndall, B. R. Rae, D. D.-U. Li, J. A. Richardson, and R. K. Henderson, "A study of pile-up in integrated time-correlated single photon counting systems," *Review of Scientific Instruments*, vol. 84, no. 10, p. 103105, 2013, publisher: American Institute of Physics.
- [90] C.-Y. Tsai, K. N. Kutulakos, S. G. Narasimhan, and A. C. Sankaranarayanan, "The geometry of first-returning photons for non-line-of-

- sight imaging,” in *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, 2017, pp. 7216–7224.
- [91] M. O’Toole, F. Heide, D. B. Lindell, K. Zang, S. Diamond, and G. Wetzstein, “Reconstructing transient images from single-photon sensors,” in *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, 2017, pp. 1539–1547.
 - [92] M. Plack, C. Callenberg, M. Schneider, and M. B. Hullin, “Fast differentiable transient rendering for non-line-of-sight reconstruction,” in *Proceedings of the IEEE/CVF Winter Conference on Applications of Computer Vision (WACV)*, January 2023, pp. 3067–3076. [Online]. Available: https://openaccess.thecvf.com/content/WACV2023/html/Plack_Fast_Differentiable_Transient_Rendering_for_Non-Line-of-Sight_Reconstruction_WACV_2023_paper.html
 - [93] J. Marco, A. Jarabo, J. H. Nam, X. Liu, M. Á. Cosculluela, A. Velten, and D. Gutierrez, “Virtual light transport matrices for non-line-of-sight imaging,” 2021. [Online]. Available: <https://arxiv.org/abs/2103.12622>
 - [94] C. Gu, T. Sultan, K. Masumnia-Bisheh *et al.*, “Fast non-line-of-sight imaging with non-planar relay surfaces,” *IEEE Transactions on Computational Imaging*, vol. 9, pp. 193–205, 2023.
 - [95] X. Liu, J. Wang, L. Xiao, Z. Shi, X. Fu, and L. Qiu, “Non-line-of-sight imaging with arbitrary illumination and detection pattern,” *Nature Communications*, vol. 14, p. 3230, 2023.
 - [96] X. Liu, J. Wang, L. Xiao, X. Fu, L. Qiu, and Z. Shi, “Few-shot non-line-of-sight imaging with signal-surface collaborative regularization,” in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, June 2023, pp. 13 303–13 312. [Online]. Available: https://openaccess.thecvf.com/content/CVPR2023/html/Liu_Few-Shot_Non-Line-of-Sight_Imaging_With_Signal-Surface_Collaborative_Regularization_CVPR_2023_paper.html
 - [97] D. Royo, T. Sultan, A. Muñoz, K. Masumnia-Bisheh, E. Brandt, D. Gutierrez, A. Velten, and J. Marco, “Virtual mirrors: Non-line-of-sight imaging beyond the third bounce,” *ACM Transactions on Graphics*, vol. 42, no. 4, pp. 1–15, August 2023, sIGGRAPH 2023. [Online]. Available: <https://doi.org/10.1145/3592429>
 - [98] P. Luesia, M. Crespo, A. Jarabo, and A. Redo-Sanchez, “Non-line-of-sight imaging in the presence of scattering media using phasor fields,” *Optics Letters*, vol. 47, no. 6, pp. 1440–1443, 2022.
 - [99] Y. Yu, S. Shen, Z. Wang, B. Huang *et al.*, “Enhancing non-line-of-sight imaging via learnable inverse kernel and attention mechanisms,” in *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*, 2023, pp. 10 563–10 573.
 - [100] I. Cho, H. Shim, and S.-J. Kim, “Learning to enhance aperture phasor field for non-line-of-sight imaging,” in *European Conference on Computer Vision (ECCV)*, 2024.
 - [101] H. Shim, I. Cho, D. Kwon, and S.-J. Kim, “Domain reduction strategy for non-line-of-sight imaging,” in *European Conference on Computer Vision (ECCV)*, 2024.
 - [102] Y. Fujimura, T. Kushida, T. Funatomi, and Y. Mukaigawa, “Nlos-neus: Non-line-of-sight neural implicit surface,” 2023. [Online]. Available: <https://arxiv.org/abs/2303.12280>
 - [103] B. Huang, X. Peng, S. Shen, S. Xia, R. Li, Y. Yu, Y. Wang, S. Gao, W. Chen, S. Li, and J. Yu, “Omni-line-of-sight imaging for holistic shape reconstruction,” April 2023, arXiv preprint. [Online]. Available: <https://arxiv.org/abs/2304.10780>
 - [104] J. Miao, Y. Shi, L. Liu, Y. Wei, F. Cai, L. Bai, E. Guo, and J. Han, “Under-scanning non-line-of-sight imaging based on convolution approximation and optimization,” *APL Photonics*, vol. 10, no. 6, p. 066110, 2025. [Online]. Available: <https://doi.org/10.1063/5.0266391>
 - [105] W. Zhang, S. Zhu, L. Chen, L. Liu, L. Bai, E. Y. Lam, E. Guo, and J. Han, “Sub-pixel resolving modulation for non-line-of-sight imaging,” *Optics Express*, vol. 33, no. 14, pp. 30 783–30 798, 2025. [Online]. Available: <https://doi.org/10.1364/OE.569102>
 - [106] Y. Sun, Y. Hong, Z. Qiu, W. Li, W. Li, Q. Sun, and F. Xu, “CUDA-accelerated non-line-of-sight imaging with irregular relay surfaces,” *Optics and Lasers in Engineering*, vol. 200, p. 109591, 2026. [Online]. Available: <https://doi.org/10.1016/j.optlaseng.2025.109591>
 - [107] Z.-P. Li, J.-T. Ye, X. Huang, P.-Y. Jiang, Y. Cao, Y. Hong, C. Yu, J. Zhang, Q. Zhang, C.-Z. Peng, F. Xu, and J.-W. Pan, “Single-photon imaging over 200 km,” *Optica*, vol. 8, no. 3, p. 344, March 2021.
 - [108] Z.-P. Li, X. Huang, Y. Cao, B. Wang, Y.-H. Li, W. Jin, C. Yu, J. Zhang, Q. Zhang, C.-Z. Peng, F. Xu, and J.-W. Pan, “Single-photon computational 3d imaging at 45  km,” *Photon. Res.*, vol. 8, no. 9, pp. 1532–1540, Sep 2020. [Online]. Available: <http://www.osapublishing.org/prj/abstract.cfm?URI=prj-8-9-1532>
 - [109] X. Liu and A. Velten, “The role of Wigner Distribution Function in Non-Line-of-Sight Imaging,” in *2020 IEEE International Conference on Computational Photography (ICCP)*, April 2020, pp. 1–12.
 - [110] M. Isogawa, D. Chan, Y. Yuan, K. Kitani, and M. O’Toole, “Efficient Non-Line-of-Sight Imaging from Transient Sinograms,” p. 26.
 - [111] J. Wang, X. Liu, L. Xiao, Z. Shi, L. Qiu, and X. Fu, “Non-line-of-sight imaging with signal superresolution network,” in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, June 2023, pp. 17 420–17 429. [Online]. Available: https://openaccess.thecvf.com/content/CVPR2023/html/Wang_Non-Line-of-Sight_Imaging_With_Signal_Superresolution_Network_CVPR_2023_paper.html
 - [112] Y. Li, Y. Zhang, J. Ye, F. Xu, and Z. Xiong, “Deep non-line-of-sight imaging from under-scanning measurements,” in *Advances in Neural Information Processing Systems*, vol. 36, 2023, metadata verified from the reference list of LEAP; add a publisher URL when a stable proceedings page is confirmed.
 - [113] X. Cui, H. Yue, S. Li, X. Yin *et al.*, “Virtual scanning: Unsupervised non-line-of-sight imaging from irregularly undersampled transients,” in *Advances in Neural Information Processing Systems (NeurIPS)*, 2024.
 - [114] Z. Li, X. Liu, J. Wang, Z. Shi, L. Qiu, and X. Fu, “Fast non-line-of-sight imaging based on first photon event stamping,” *Optics Letters*, vol. 47, no. 12, pp. 3065–3068, 2022.
 - [115] J. Liu, Y. Zhou, X. Huang, Z.-P. Li *et al.*, “Photon-efficient non-line-of-sight imaging,” *IEEE Transactions on Computational Imaging*, vol. 8, pp. 1122–1133, 2022.
 - [116] W. Zhang, E. Guo, S. Zhu, C. Huang, L. Chen, L. Liu *et al.*, “Real-time scan-free non-line-of-sight imaging,” *APL Photonics*, vol. 9, p. 026106, 2024.
 - [117] D. Zhu and W. Cai, “Fast non-line-of-sight imaging with two-step deep remapping,” *ACS Photonics*, vol. 9, no. 8, pp. 2726–2734, 2022.
 - [118] F. Mu, S. Mo, J. Peng, X. Liu, J. H. Nam, S. Raghavan, A. Velten, and Y. Li, “Physics to the rescue: Deep non-line-of-sight reconstruction for high-speed imaging,” *IEEE Transactions on Pattern Analysis and Machine Intelligence*, vol. 44, no. 12, pp. 9927–9940, 2022.
 - [119] S. Seidel, H. Rueda-Chacón, I. Cusini, F. Villa *et al.*, “Non-line-of-sight snapshots and background mapping with an active corner camera,” *Nature Communications*, vol. 14, p. 4209, 2023.
 - [120] X. Huang, R. Ye, W. Li, J. Zeng *et al.*, “Non-line-of-sight imaging and vibrometry using a comb-calibrated coherent sensor,” *Physical Review Letters*, vol. 132, p. 243803, 2024.
 - [121] M. Aittala, P. Sharma, L. Murmann, A. Yedidia, G. Wornell, B. Freeman, and F. Durand, “Computational Mirrors: Blind Inverse Light Transport by Deep Matrix Factorization,” in *Advances in Neural Information Processing Systems*, 2019, pp. 14 311–14 321.
 - [122] O. Katz, P. Heidmann, M. Fink, and S. Gigan, “Non-invasive single-shot imaging through scattering layers and around corners via speckle correlations,” *Nature photonics*, vol. 8, no. 10, p. 784, 2014.
 - [123] S. Feng, C. Kane, P. A. Lee, and A. D. Stone, “Correlations and fluctuations of coherent wave transmission through disordered media,” *Physical review letters*, vol. 61, no. 7, p. 834, 1988.
 - [124] I. Freund, M. Rosenbluh, and S. Feng, “Memory effects in propagation of optical waves through disordered media,” *Physical review letters*, vol. 61, no. 20, p. 2328, 1988.
 - [125] G. Osnabrugge, R. Horstmeyer, I. N. Papadopoulos, B. Judkewitz, and I. M. Vellekoop, “Generalized optical memory effect,” *Optica*, vol. 4, no. 8, pp. 886–892, 2017.
 - [126] A. Beckus, A. Tamasan, and G. K. Atia, “Multi-Modal Non-Line-of-Sight Passive Imaging,” *IEEE Transactions on Image Processing*, vol. 28, no. 7, pp. 3372–3382, July 2019.
 - [127] M. Chen, H. Liu, S. Jin, M. Liu, Z. Xu, X. Jiang, and M. Xu, “Hyper-NLOS: Hyperspectral passive non-line-of-sight imaging,” *Optics Express*, vol. 32, no. 5, pp. 7430–7443, 2024.
 - [128] K. Tanaka, Y. Mukaigawa, and A. Kadambi, “Enhancing passive non-line-of-sight imaging using polarization cues,” 2019, arXiv preprint; no final conference or journal venue verified as of 13 July 2026. [Online]. Available: <https://arxiv.org/abs/1911.12906>
 - [129] A. B. Yedidia, M. Baradad, C. Thrampoulidis, W. T. Freeman, and G. W. Wornell, “Using Unknown Occluders to Recover Hidden Scenes,” in *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, 2019, pp. 12 231–12 239.
 - [130] A. Torralba and W. T. Freeman, “Accidental pinhole and pinhole cameras: Revealing the scene outside the picture,” in *2012 IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*. IEEE, 2012, pp. 374–381.
 - [131] S. W. Seidel, Y. Ma, J. Murray-Bruce, C. Saunders, W. T. Freeman, C. C. Yu, and V. K. Goyal, “Corner occluder computational periscopy: Estimating a hidden scene from a single photograph,” in *IEEE International Conference on Computational Photography, ICCP 2019, Tokyo, Japan, May 15-17, 2019*. IEEE, 2019, pp. 1–9.

- [132] K. L. Bouman, V. Ye, A. B. Yedidia, F. Durand, G. W. Wornell, A. Torralba, and W. T. Freeman, "Turning corners into cameras: Principles and methods," in *Proceedings of the IEEE International Conference on Computer Vision*, 2017, pp. 2270–2278.
- [133] T. Maeda, Y. Wang, R. Raskar, and A. Kadambi, "Thermal non-line-of-sight imaging," in *2019 IEEE International Conference on Computational Photography (ICCP)*, 2019, pp. 1–11.
- [134] R. Geng, Y. Hu, Z. Lu, C. Yu, H. Li, H. Zhang, and Y. Chen, "Passive non-line-of-sight imaging using optimal transport," *IEEE Transactions on Image Processing*, vol. 31, pp. 110–124, 2022.
- [135] J. Zhang, R. Geng, X. Du, Y. Chen, H. Li, and Y. Hu, "Passive non-line-of-sight imaging with light transport modulation," *IEEE Transactions on Image Processing*, 2025.
- [136] B. Newhall, *The History of Photography*. Museum of modern art New York, 1982.
- [137] B. L. Anderson, "The role of partial occlusion in stereopsis," *Nature*, vol. 367, no. 6461, pp. 365–368, January 1994.
- [138] M. Baradad, V. Ye, A. B. Yedidia, F. Durand, W. T. Freeman, G. W. Wornell, and A. Torralba, "Inferring Light Fields from Heterodyned," in *2018 IEEE/CVF Conference on Computer Vision and Pattern Recognition*. Salt Lake City, UT: IEEE, June 2018, pp. 6267–6275.
- [139] A. Veeraraghavan, R. Raskar, A. Agrawal, A. Mohan, and J. Tumblin, "Dappled Photography: Mask Enhanced Cameras for Heterodyned Light Fields and Coded Aperture Refocusing," in *In ACM SIGGRAPH 2007 Papers, SIGGRAPH '07*, New York, NY, USA, 2007. ACM, 2007, p. 12.
- [140] P. Sen, B. Chen, G. Garg, S. R. Marschner, M. Horowitz, M. Levoy, and H. P. A. Lensch, "Dual photography," *ACM Trans. Graph.*, vol. 24, no. 3, pp. 745–755, July 2005.
- [141] T. F. Chan and C.-K. Wong, "Total variation blind deconvolution," *IEEE transactions on Image Processing*, vol. 7, no. 3, pp. 370–375, 1998.
- [142] D. Kundur and D. Hatzinakos, "Blind image deconvolution," *IEEE signal processing magazine*, vol. 13, no. 3, pp. 43–64, 1996.
- [143] A. Levin, Y. Weiss, F. Durand, and W. T. Freeman, "Understanding and evaluating blind deconvolution algorithms," in *2009 IEEE Conference on Computer Vision and Pattern Recognition*. IEEE, 2009, pp. 1964–1971.
- [144] J. R. Fienup, "Phase retrieval algorithms: A comparison," *Applied optics*, vol. 21, no. 15, pp. 2758–2769, 1982.
- [145] J. Bertolotti, E. G. Van Putten, C. Blum, A. Lagendijk, W. L. Vos, and A. P. Mosk, "Non-invasive imaging through opaque scattering layers," *Nature*, vol. 491, no. 7423, pp. 232–234, 2012.
- [146] Y. Wang, Z. Wang, B. Zhao, D. Wang, M. Chen, and X. Li, "Propagate and calibrate: Real-time passive non-line-of-sight tracking," in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 2023, pp. 972–981.
- [147] R. Czajkowski and J. Murray-Bruce, "Two-edge-resolved three-dimensional non-line-of-sight imaging with an ordinary camera," *Nature Communications*, vol. 15, p. 4376, 2024.
- [148] C. Zhou, C.-Y. Wang, and Z. Liu, "Non-line-of-sight imaging off a Phong surface through deep learning," *arXiv preprint arXiv*, p. 24, 2020.
- [149] T. Yu, M. Qiao, H. Liu, and S. Han, "Non-Line-of-Sight Imaging Through Deep Learning," *Acta Optica Sinica*, pp. 1–12, 2019.
- [150] K. Tajima, T. Shimano, Y. Nakamura, M. Sao, and T. Hoshizawa, "Lensless light-field imaging with multi-phased fresnel zone aperture," in *2017 IEEE International Conference on Computational Photography (ICCP)*. IEEE, 2017, pp. 1–7.
- [151] R. Fatemi, B. Abiri, and A. Hajimiri, "An 8*8 heterodyne lens-less opa camera," in *Conference on Lasers and Electro-Optics (2017), paper JW2A.9*. Optical Society of America, 2017, p. JW2A.9. [Online]. Available: https://www.osapublishing.org/abstract.cfm?uri=CLEO_QELS-2017-JW2A.9
- [152] S. K. Sahoo, D. Tang, and C. Dang, "Single-shot multispectral imaging with a monochromatic camera," *Optica*, vol. 4, no. 10, pp. 1209–1213, October 2017, publisher: Optical Society of America. [Online]. Available: <https://www.osapublishing.org/optical/abstract.cfm?uri=optica-4-10-1209>
- [153] X. Du, R. Geng, J. Zhang, Y. Chen, and Y. Hu, "Passive non-line-of-sight imaging with parallel encoder," in *ICASSP 2025*. IEEE, 2025, pp. 1–5.
- [154] Y. Wang, R. Geng, J. Zhang, X. Du, Y. Chen, and Y. Hu, "Nlos-r 2: Alternate reconstruction and recognition for non-line-of-sight understanding," in *2025 IEEE International Conference on Multimedia and Expo (ICME)*. IEEE, 2025, pp. 1–6.
- [155] Y. He, D. Zhang, Y. Hu, and Y. Chen, "Non-line-of-sight Imaging with Radio Signals," in *2020 Asia-Pacific Signal and Information Processing Association Annual Summit and Conference (APSIPA ASC)*, December 2020, pp. 11–16, iSSN: 2640-0103.
- [156] W. Li, Y. Zhou, W. Li, Y. Chen, X. Huang, C. Dai, J. Zeng *et al.*, "Turning rough surfaces into non-line-of-sight cameras," *Optica*, vol. 12, no. 2, pp. 176–185, 2025.
- [157] Y. LeCun, Y. Bengio, and G. Hinton, "Deep learning," *Nature*, vol. 521, no. 7553, p. 436, 2015.
- [158] O. Kupyn, V. Budzan, M. Mykhailych, D. Mishkin, and J. Matas, "DeblurGAN: Blind Motion Deblurring Using Conditional Adversarial Networks," in *2018 IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, 2018.
- [159] D. Eigen, C. Puhrsch, and R. Fergus, "Depth map prediction from a single image using a multi-scale deep network," *Advances in neural information processing systems*, vol. 27, pp. 2366–2374, 2014.
- [160] D. B. Lindell, M. O'Toole, and G. Wetzstein, "Single-photon 3D imaging with deep sensor fusion," *ACM Transactions on Graphics*, vol. 37, no. 4, p. 113, 2018.
- [161] S. Su, F. Heide, G. Wetzstein, and W. Heidrich, "Deep End-to-End Time-of-Flight Imaging," in *2018 IEEE/CVF Conference on Computer Vision and Pattern Recognition*. Salt Lake City, UT: IEEE, June 2018, pp. 6383–6392. [Online]. Available: <https://ieeexplore.ieee.org/document/8578766/>
- [162] J. Marco, Q. Hernandez, A. Muñoz, Y. Dong, A. Jarabo, M. H. Kim, X. Tong, and D. Gutierrez, "DeepToF: off-the-shelf real-time correction of multipath interference in time-of-flight imaging," *ACM Transactions on Graphics*, vol. 36, no. 6, pp. 219:1–219:12, November 2017. [Online]. Available: <https://doi.org/10.1145/3130800.3130884>
- [163] L. I. Rudin, S. Osher, and E. Fatemi, "Nonlinear total variation based noise removal algorithms," *Physica D: nonlinear phenomena*, vol. 60, no. 1–4, pp. 259–268, 1992, publisher: Elsevier.
- [164] A. Chambolle, V. Caselles, D. Cremers, M. Novaga, and T. Pock, "An introduction to total variation for image analysis," *Theoretical foundations and numerical methods for sparse recovery*, vol. 9, no. 263–340, p. 227, 2010, publisher: de Gruyter Berlin.
- [165] J. Tang, B. E. Nett, and G.-H. Chen, "Performance comparison between total variation (TV)-based compressed sensing and statistical iterative reconstruction algorithms," *Physics in Medicine & Biology*, vol. 54, no. 19, p. 5781, 2009, publisher: IOP Publishing.
- [166] O. Ronneberger, P. Fischer, and T. Brox, "U-net: Convolutional networks for biomedical image segmentation," in *International Conference on Medical Image Computing and Computer-Assisted Intervention*. Springer, 2015, pp. 234–241.
- [167] J. Peng, F. Mu, J. H. Nam, S. Raghavan, Y. Li, A. Velten, and Z. Xiong, "Towards non-line-of-sight photography," *arXiv preprint arXiv:2109.07783*, 2021. [Online]. Available: <https://arxiv.org/abs/2109.07783>
- [168] Y. Lecun, L. Bottou, Y. Bengio, and P. Haffner, "Gradient-based learning applied to document recognition," *Proceedings of the IEEE*, vol. 86, no. 11, pp. 2278–2324, November 1998.
- [169] S. Hochreiter and J. Schmidhuber, "Long Short-Term Memory," *Neural Computation*, vol. 9, no. 8, pp. 1735–1780, November 1997.
- [170] G. Satat, M. Tancik, O. Gupta, B. Heshmat, and R. Raskar, "Object classification through scattering media with deep learning on time resolved measurement," *Optics express*, vol. 25, no. 15, pp. 17466–17479, 2017.
- [171] D. P. Kingma and M. Welling, "Auto-Encoding Variational Bayes," in *International Conference on Learning Representations*, May 2014, arXiv: 1312.6114. [Online]. Available: <http://arxiv.org/abs/1312.6114>
- [172] P. Netrapalli, P. Jain, and S. Sanghavi, "Phase retrieval using alternating minimization," *IEEE Transactions on Signal Processing*, vol. 63, no. 18, pp. 4814–4826, 2015, publisher: IEEE.
- [173] S. Shen, Z. Wang, P. Liu, Z. Pan, R. Li, T. Gao, S. Li, and J. Yu, "Non-line-of-sight Imaging via Neural Transient Fields," *IEEE Transactions on Pattern Analysis and Machine Intelligence*, pp. 1–1, 2021, conference Name: IEEE Transactions on Pattern Analysis and Machine Intelligence.
- [174] S. Sun, Y. Li, Y. Zhang, and Z. Xiong, "Generalizable non-line-of-sight imaging with learnable physical priors," 2024. [Online]. Available: <https://arxiv.org/abs/2409.14011>
- [175] J. Ye, Y. Hong, X. Su, X. Yuan, and F. Xu, "Plug-and-play algorithms for dynamic non-line-of-sight imaging," *ACM Transactions on Graphics*, vol. 43, no. 6, 2024.
- [176] X. Cui, H. Yue, S. Sun, Y. Li, Y. Hou, Z. Xiong, and J. Yang, "Transdiff: Unsupervised non-line-of-sight imaging with aperture-limited relay surfaces," *IEEE Transactions on Image*

- Processing*, vol. 34, pp. 8018–8031, 2025. [Online]. Available: <https://doi.org/10.1109/TIP.2025.3637694>
- [177] F. Mu, S. Mo, J. Peng, X. Liu, J. H. Nam, S. Raghavan, A. Velten, and Y. Li, “Physics to the rescue: Deep non-line-of-sight reconstruction for high-speed imaging,” *IEEE Transactions on Pattern Analysis and Machine Intelligence*, vol. 47, no. 8, pp. 6146–6158, 2025. [Online]. Available: <https://doi.org/10.1109/TPAMI.2022.3203383>
 - [178] H. Wu, S. Liu, X. Meng, X. Yang, and Y. Yin, “Non-line-of-sight imaging based on an untrained deep decoder network,” *Optics Letters*, vol. 47, no. 16, pp. 4032–4035, 2022.
 - [179] Q. Hernandez, D. Gutierrez, and A. Jarabo, “A computational model of a single-photon avalanche diode sensor for transient imaging,” *arXiv preprint arXiv:1703.02635*, 2017.
 - [180] D. Martin, C. Fowlkes, D. Tal, and J. Malik, “A Database of Human Segmented Natural Images and its Application to Evaluating Segmentation Algorithms and Measuring Ecological Statistics,” in *IEEE International Conference on Computer Vision (ICCV)*, 2001, pp. 416–425.
 - [181] B. T. Phong, “Illumination for Computer Generated Pictures,” *Communications of the ACM*, vol. 18, no. 6, p. 7, 1975.
 - [182] D. Royo, J. García, P. Luesia-Lahoz, J. Marco, A. Muñoz, and A. Jarabo, “Non-line-of-sight transient rendering,” *ACM Transactions on Graphics*, vol. 41, no. 6, pp. 1–13, 2022, proc. SIGGRAPH Asia 2022.
 - [183] M. Plack, C. Callenberg, M. Schneider, and M. B. Hullin, “Fast differentiable transient rendering for non-line-of-sight reconstruction,” in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 2023.
 - [184] Y. Shi, J. Miao, T. Qin, F. Cai, Y. Wei, L. Liu, T. Li, C. Wu, H. Liang, Y. Yin, L. Bai, E. Guo, and J. Han, “Fast non-line-of-sight transient data simulation and an open benchmark dataset,” *arXiv preprint arXiv:2506.03747*, 2025. [Online]. Available: <https://arxiv.org/abs/2506.03747>
 - [185] K. He, X. Zhang, S. Ren, and J. Sun, “Deep Residual Learning for Image Recognition,” in *2016 IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*. Las Vegas, NV, USA: IEEE, June 2016, pp. 770–778.
 - [186] Y. Liu, Z. Wang, Y. Zeng, H. Zeng, and D. Zhao, “PD-GAN: Perceptual-Details GAN for extremely noisy low light image enhancement,” in *IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, 2021.
 - [187] D. Rozumnyi, M. R. Oswald, V. Ferrari, J. Matas, and M. Pollefeys, “DeFMO: Deblurring and Shape Recovery of Fast Moving Objects,” *arXiv:2012.00595 [cs]*, December 2020, arXiv: 2012.00595. [Online]. Available: <http://arxiv.org/abs/2012.00595>
 - [188] M. Galindo, J. Marco, M. O’Toole, G. Wetzstein, D. Gutierrez, and A. Jarabo, “A Dataset for Benchmarking Time-resolved Non-line-of-sight Imaging,” in *ACM SIGGRAPH 2019 Posters*, ser. SIGGRAPH ’19. New York, NY, USA: ACM, 2019, pp. 73:1–73:2.
 - [189] S. Somasundaram, A. Dave, C. Henley, A. Veeraraghavan, and R. Raskar, “Role of transients in two-bounce non-line-of-sight imaging,” 2023. [Online]. Available: <https://arxiv.org/abs/2304.01308>
 - [190] J. Zhang, B. Zhang, Z. Wang, C. Qu, L. Bai, X. Chen, J. Han, and B. Guo, “Neural illumination fields: High-fidelity and ambient-robust stereo reconstruction for two-bounce non-line-of-sight imaging,” *Optics and Lasers in Engineering*, vol. 198, p. 109514, March 2026. [Online]. Available: <https://doi.org/10.1016/j.optlaseng.2025.109514>
 - [191] P. Song, Q. Zhao, R. Wang, N. Liu, Y. Qiang, T. Wang, X. Zhang, Y. Zhang, and G. Zheng, “Ptychographic non-line-of-sight imaging for depth-resolved visualization of hidden objects,” 2024. [Online]. Available: <https://arxiv.org/abs/2405.11115>
 - [192] T. Sultan, E. Brandt, K. Masumnia-Bisheh, S. Riccardo, P. Polynkin, A. Tosi, and A. Velten, “Iterating the transient light transport matrix for non-line-of-sight imaging,” 2024. [Online]. Available: <https://arxiv.org/abs/2412.10300>
 - [193] X. Liu, J. Wang, L. Xiao, Z. Shi, X. Fu, and L. Qiu, “Non-line-of-sight imaging with arbitrary illumination and detection pattern,” *Nature Communications*, vol. 14, p. 3230, 2023. [Online]. Available: <https://www.nature.com/articles/s41467-023-38898-4>
 - [194] I. Cho, H. Shim, and S. J. Kim, “Learning to enhance aperture phasor field for non-line-of-sight imaging,” 2024. [Online]. Available: <https://arxiv.org/abs/2407.18574>
 - [195] P. Luesia, M. Crespo, A. Jarabo, and A. Redo-Sanchez, “Non-line-of-sight imaging in the presence of scattering media using phasor fields,” 2023. [Online]. Available: <https://arxiv.org/abs/2311.09223>
 - [196] Y. Gui, Y. Fu, X. Xiao, and M. Yao, “Passive none-line-of-sight imaging with arbitrary scene condition and detection pattern in small amount of prior data,” 2024. [Online]. Available: <https://arxiv.org/abs/2404.06015>
 - [197] N. Scheiner, F. Kraus, F. Wei, B. Phan, F. Mannan, N. Appenrodt, W. Ritter, J. Dickmann, K. Dietmayer, B. Sick, and F. Heide, “Seeing Around Street Corners: Non-Line-of-Sight Detection and Tracking In-the-Wild Using Doppler Radar,” in *2020 IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, p. 10.
 - [198] D. Du, M. Zhao, Y. Yang, D. Scheuble, X. Huang, Z. Shao, M. Bijelic, K. Sengupta, and F. Heide, “X-band radar non-line-of-sight imaging,” in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, June 2026, pp. 5647–5658. [Online]. Available: https://openaccess.thecvf.com/content/CVPR2026/html/Du_X-band_Radar_Non-Line-of-Sight_Imaging_CVPR_2026_paper.html
 - [199] L. Dodds, T. Boroushaki, and F. Adib, “Mito: Enabling non-line-of-sight perception using millimeter-waves through real-world datasets and simulation tools,” 2025. [Online]. Available: <https://arxiv.org/abs/2502.10259>
 - [200] K. Ruttik, H. Yigitler, J. Liao, A. Sheverdyaev, and R. Jantti, “Backscatter assisted indoor nlos positioning,” 2026. [Online]. Available: <https://arxiv.org/abs/2606.17325>
 - [201] K. Yasmeen, S. S. Ram, and D. Kundu, “Radar sensing using dual-beam reconfigurable intelligent surface,” 2026. [Online]. Available: <https://arxiv.org/abs/2602.11473>
 - [202] D. Tornielli Bellini, D. Tagliaferri, M. Mizmizi, S. Tebaldini, and U. Spagnolini, “Multi-view near-field imaging in nlos with non-reconfigurable em skins,” 2024. [Online]. Available: <https://arxiv.org/abs/2401.06891>
 - [203] H. Chen, Z. Yu, T. Wu, W. Liu, M. Elakashlan, H. Shin, M. C. Valenti, and R. Schober, “Beyond $\lambda/2$: Can arbitrary emvs arrays achieve unambiguous nlos localization?” 2026. [Online]. Available: <https://arxiv.org/abs/2602.07515>
 - [204] Y. Yan, Z. Shi, Y. Wang, C. Jiang, C. T. Chou, and W. Hu, “mmmirror: Device free mmwave indoor nlos localization using van-atta-arrays,” 2025. [Online]. Available: <https://arxiv.org/abs/2505.10816>
 - [205] R. S. S. Bandari, A. Ashtekar, O. Ibrahim, and M. E. Eltayeb, “See and beam: Leveraging lidar sensing and specular surfaces for indoor mmwave connectivity,” 2025. [Online]. Available: <https://arxiv.org/abs/2511.09840>
 - [206] D. Tornielli Bellini, D. Tagliaferri, P. Grassi, D. Scazzoli, S. Tebaldini, and U. Spagnolini, “Enabling NLOS imaging capabilities at the initial access of 6G base stations,” 2025, arXiv preprint. [Online]. Available: <https://arxiv.org/abs/2511.15416>
 - [207] A. Young, N. M. Batagoda, H. Zhang, A. Dave, A. Pediredla, D. Negrut, and R. Raskar, “Enhancing autonomous navigation by imaging hidden objects using single-photon lidar,” 2024. [Online]. Available: <https://arxiv.org/abs/2410.03555>
 - [208] S. Somasundaram, A. Young, A. Dave, A. Pediredla, and R. Raskar, “Imaging hidden objects with consumer lidar via motion induced sampling,” 2026. [Online]. Available: <https://arxiv.org/abs/2605.17865>
 - [209] N. Behari, D. Rivero, L. Apostolides, S. Ghosh, P. P. Liang, and R. Raskar, “Denali: A dataset enabling non-line-of-sight spatial reasoning with low-cost lidars,” 2026. [Online]. Available: <https://arxiv.org/abs/2604.16201>
 - [210] J. Marco, A. Jarabo, J. H. Nam, A. Tosi, D. Gutierrez, and A. Velten, “A comprehensive study of time-of-flight non-line-of-sight imaging,” 2026. [Online]. Available: <https://arxiv.org/abs/2603.09548>