## Xenterra 16TX unmanaged Switch 16 Port 100Mbit
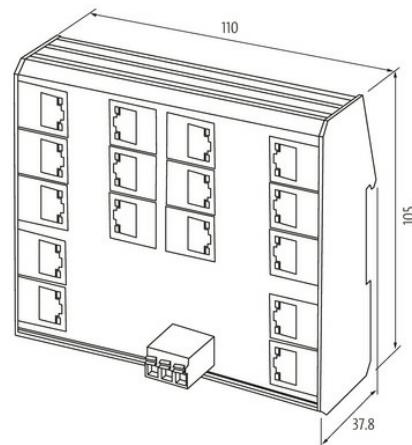
16 port unmanaged switch
DIN-rail mountable TH35 (EN 60715)
Connection cables are in the online shop under "Connection Technology".

Link to Product

Illustration

Product may differ from Image

Approvals

More Info

Bus technologies

General data	
Mounting method	DIN-rail mountable TH35 (EN 60715)
Temperature range	-40...+70 °C (storage temperature -40...+85 °C)
Housing	Metal black

Protection	IP20
Dimensions H×W×D	105×110×37.8 mm

Technical Data	
Operating voltage	8...28 V AC/9...36 V DC
Transfer rate	10/100 Mbit/s full duplex
Operating modes	Autocrossing Autonegotiation

Connections	
Fieldbus	16× RJ45
Supply	Push-In spring clamp terminals, 0.2...2.5 mm² (0.25...1.5 mm²)

Switch Management	
Protocols	no
Port Mirroring	no
VLAN (QoS) IEEE 802.p	yes
Alarm contact	no
Remote maintenance	no
Webserver	no
Switch Form	Unmanaged Switch

Diagnostic	
Communication status	via LED
Monitoring - no voltage	yes

Commercial data	
country of origin	DE
customs tariff number	85176200
EAN	4048879830416
eClass	19170106
Packaging unit	1.000

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 04/21

Murrelektronik GmbH | Falkenstraße 3 | 71570 Oppenweiler | Fon +49 (71 91) 47-0 | Fax +49 (71 91) 47-491000 | shop@murrelektronik.com | shop.murrelektronik.com