
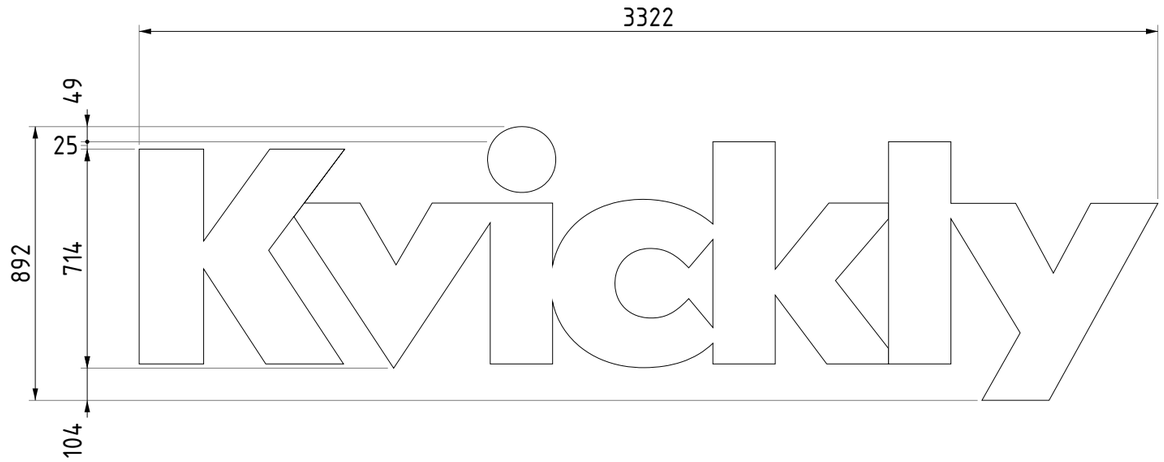


FRONT VIEW


SCALE 1:20



SIDE VIEW (RIGHT)

SCALE 1:20


– – – 12V cable 1,5 m from each letter, exits on one line (4 pcs., small parts – exit in the part)

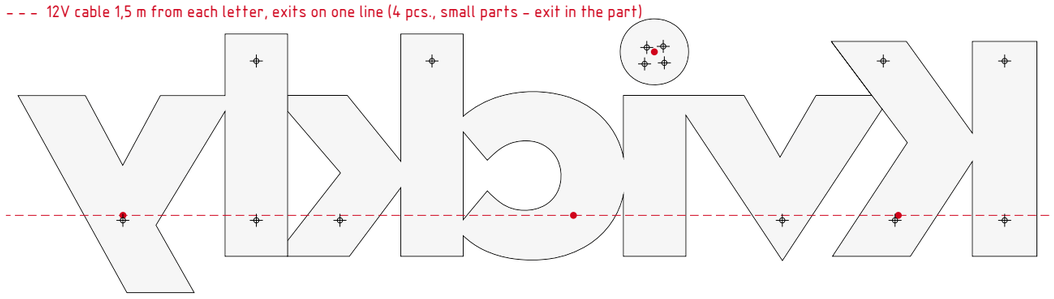

White LED

REAR VIEW (MIRRORED)


SCALE 1:20 | true view from the back

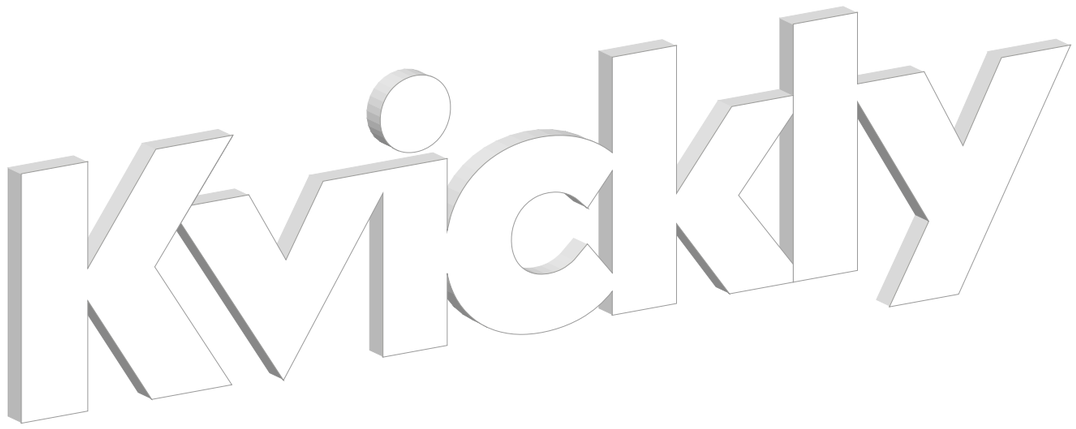

3D VIEW

ILLUSTRATIVE – NOT TO SCALE

PROFILE P6 – FIXED TO FACADE (SEPARATE LETTERS)



BILL OF MATERIALS (per 1 pcs.)

POS	PART	MATERIAL	FINISH	QTY (PERIMETER / AREA)
1	Letter face	Acrylic 8 mm white	–	18,13 m / 3,16 m²
2	Letter return	Alu 1 mm	RAL 9016	18,13 m / 1,61 m²
3	Letter back (holes – DXF)	Alu 1,5 mm	RAL 9016	18,13 m / 3,46 m²
4	LED modules	White LED	–	
5	Facade fixing screws (by fitter)	⌀6 mm holes	–	14 holes
6	Cable 12V 1,5 m from each letter (one line)	cable	–	4 pcs.
7	Mounting template 1:1	paper	–	1 pcs.
8	Converter 12V		–	

MAIN DATA

Quantity	1 pcs.
Overall size	3322 x 892 mm
Profile	P6, front illuminated
Parts	K | vick | ly + i dot
Letter depth	70 mm
Face	Acrylic 8 mm white
Returns / back	RAL 9016 gloss 80 %
Illumination	White LED
Power	12V, 1,5 m from each part
Wind qp	0,56 kN/m²
Mounting	separate letters, no frame
Weight (calc.)	≈ 23 kg / pcs, excl. PSU

REVISIONS ALL DIMENSIONS IN mm UNLESS OTHERWISE SPECIFIED

REV	DESCRIPTION	DATE	BY
A	First issue	2026-10-16	


CLIENT

BN Skilte A/S / Kvickly Skibhusvej

TITLE


Kvickly KV-1137 FAC-B-ML-P6-700 3322 x 892 mm – P6, 3 pieces + i dot

ORDER NO.	FILE / DRAWING NO.		
ALT0000_00.00_RS	PO 3311 KV-1137		
SCALE 1:20	FORMAT A3	REV. A	PROJECTION
DATE 2026-10-16	**1 pcs.**	Sheet 1 / 2	

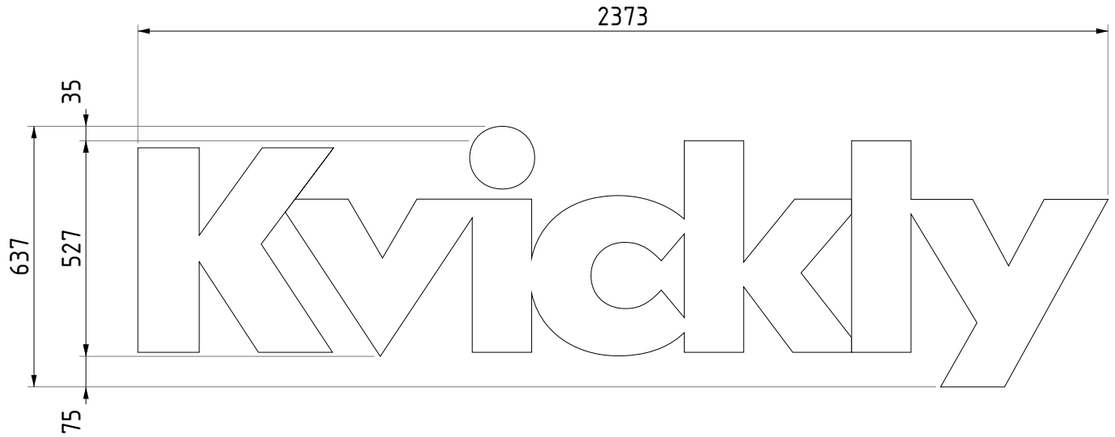

FRONT VIEW


SCALE 1:15



SIDE VIEW (RIGHT)

SCALE 1:15


– – – 12V cable 1,5 m from each letter, exits on one line (4 pcs., small parts – exit in the part)

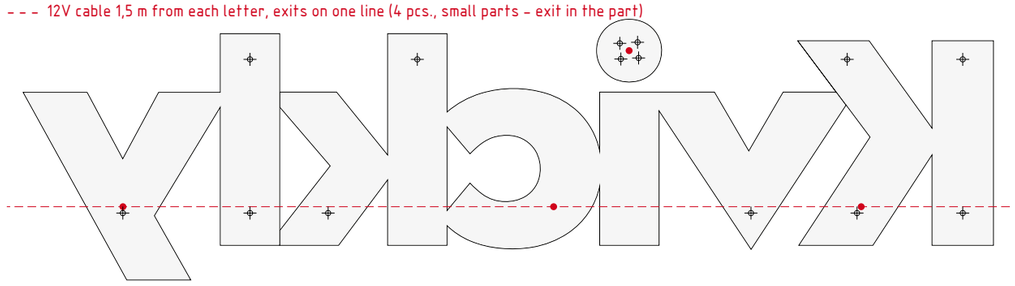

White LED

REAR VIEW (MIRRORED)


SCALE 1:15 | true view from the back

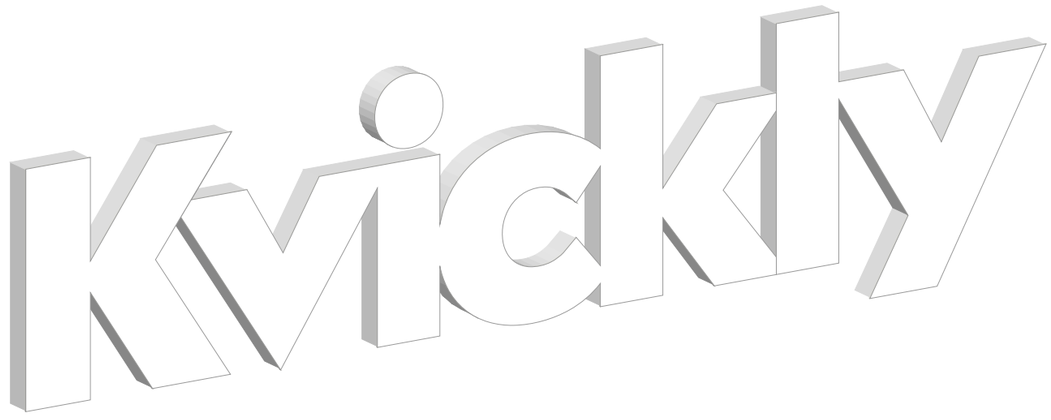

3D VIEW

ILLUSTRATIVE – NOT TO SCALE

PROFILE P6 – FIXED TO FACADE (SEPARATE LETTERS)



BILL OF MATERIALS (per 1 pcs.)

POS	PART	MATERIAL	FINISH	QTY (PERIMETER / AREA)
1	Letter face	Acrylic 8 mm white	–	12,95 m / 2,12 m²
2	Letter return	Alu 1 mm	RAL 9016	12,95 m / 0,99 m²
3	Letter back (holes – DXF)	Alu 1,5 mm	RAL 9016	12,95 m / 1,64 m²
4	LED modules	White LED	–	
5	Facade fixing screws (by fitter)	⌀6 mm holes	–	14 holes
6	Cable 12V 1,5 m from each letter (one line)	cable	–	4 pcs.
7	Mounting template 1:1	paper	–	1 pcs.
8	Converter 12V		–	

MAIN DATA

Quantity	1 pcs.
Overall size	2373 x 637 mm
Profile	P6, front illuminated
Parts	K | vick | ly + i dot
Letter depth	60 mm
Face	Acrylic 8 mm white
Returns / back	RAL 9016 gloss 80 %
Illumination	White LED
Power	12V, 1,5 m from each part
Wind qp	0,56 kN/m²
Mounting	separate letters, no frame
Weight (calc.)	≈ 12 kg / pcs, excl. PSU

REVISIONS ALL DIMENSIONS IN mm UNLESS OTHERWISE SPECIFIED

REV	DESCRIPTION	DATE	BY
A	First issue	2026-10-16	

CLIENT

BN Skilte A/S / Kvickly Skibhusvej

TITLE

Kvickly KV-1136 FAC-B-ML-P6-637 2373 x 637 mm – P6, 3 pieces + i dot

ORDER NO.	FILE / DRAWING NO.
ALT0000_00.00_RS	PO 3311 KV-1136

SCALE	FORMAT	REV.	PROJECTION
1:15	A3	A	

DATE		
2026-10-16	1 pcs.	Sheet 2 / 2