



FRONT VIEW

SCALE 1:20



SIDE VIEW (RIGHT)

SCALE 1:20

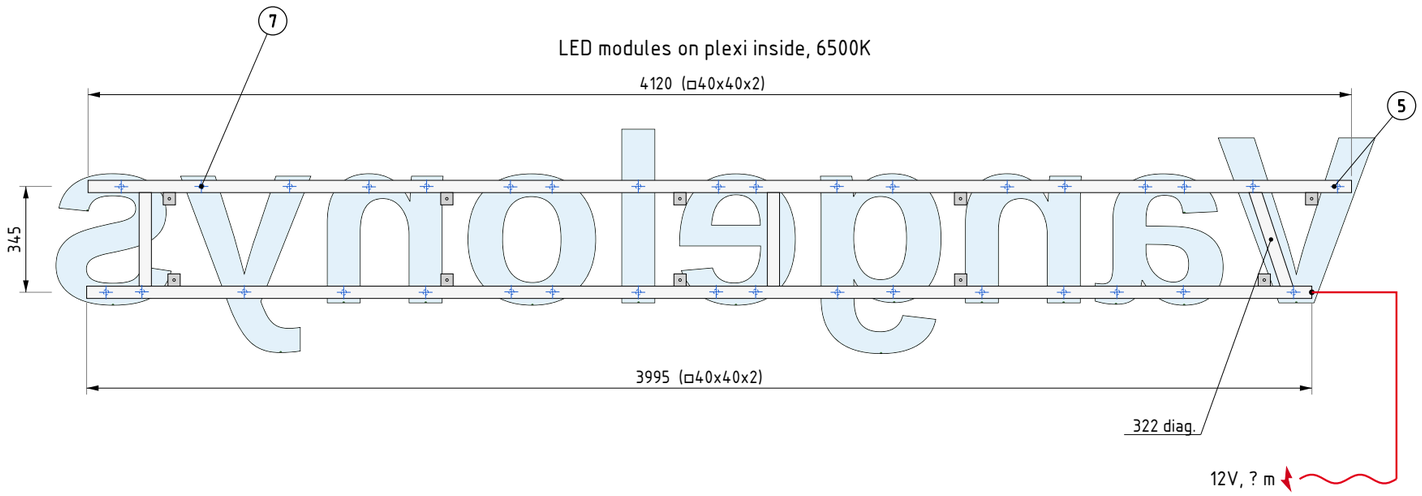

REAR VIEW (MIRRORED)


SCALE 1:20 | true view from the back | 35 spacers ⌀16 (blue) – centre of fixing area



3D VIEW

ILLUSTRATIVE – NOT TO SCALE

PROFILE P3 HALO ON RAILS – TYPICAL SECTION

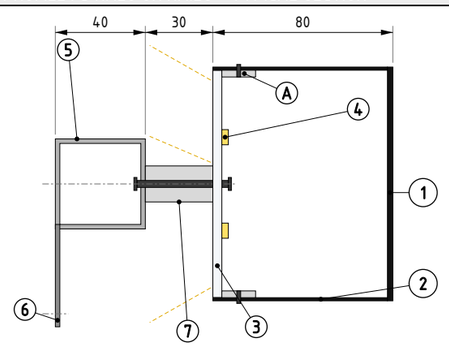

BILL OF MATERIALS (per 1 pcs.)

POS	PART	MATERIAL	FINISH	QTY (PERIMETER / AREA)
1	Letter face	Alu 2 mm	RAL 6017	2,31 m²
2	Letter return	Alu 1 mm	RAL 6017	22,97 m / 2,19 m²
3	Letter back (halo, light to the back)	Plexiglass 4 mm	transparent	22,97 m / 2,42 m²
4	LED modules on plexi inside, 6500K		6500K	
5	Wallframe 40x40x2 mm with ears, one frame	Aluminium	RAL 9016	9,05 m (2 x 6 m bars)
6	Mounting ear 40 x 40 x 2 mm, ⌀8 mm hole	Aluminium	RAL 9016	10 pcs. (0 extended)
7	Spacer tube ⌀16 x 30 mm + threaded rod M4			35 pcs.
A	PVC fixing edge for plexi	PVC 3 mm	–	22,97 m
B	Screw through return into PVC edge	DIN 7982 2,9 x 9,5 mm	–	
8	Cable exit from rail end, 12V	cable ? m	–	1 pcs.
9	PSU 12V			
10	Wall fixing		–	

MAIN DATA

Quantity	
Overall size	4300 x 731 mm
Profile	P3 on spacers
Letter depth	80 + spacers 30
Face / returns	Alu 2 / 1 mm, RAL 6017
Back	transparent plexiglass 4 mm + PVC edge
Rails	40 x 40 x 2 mm square, RAL 9016
Illumination	LED to the back (halo), 6500K
Power	12V, cable ? m
Wall	
Weight (calc.)	≈ 23 kg / pcs, excl. PSU

REVISIONS ALL DIMENSIONS IN mm UNLESS OTHERWISE SPECIFIED

REV	DESCRIPTION	DATE	BY
A	First issue	2026-10-17	

CLIENT
TEST

TITLE
TEST P3 Vangelonys – halo letters on spacers, frame 40 x 40 x 2 mm

ORDER NO.
ALT0000_00.00_RS

FILE / DRAWING NO.
TEST_P3_Vangelonys

SCALE 1:20 | FORMAT A3 | REV. A | PROJECTION

DATE 2026-10-17 | 1 pcs. | Sheet 1 / 1