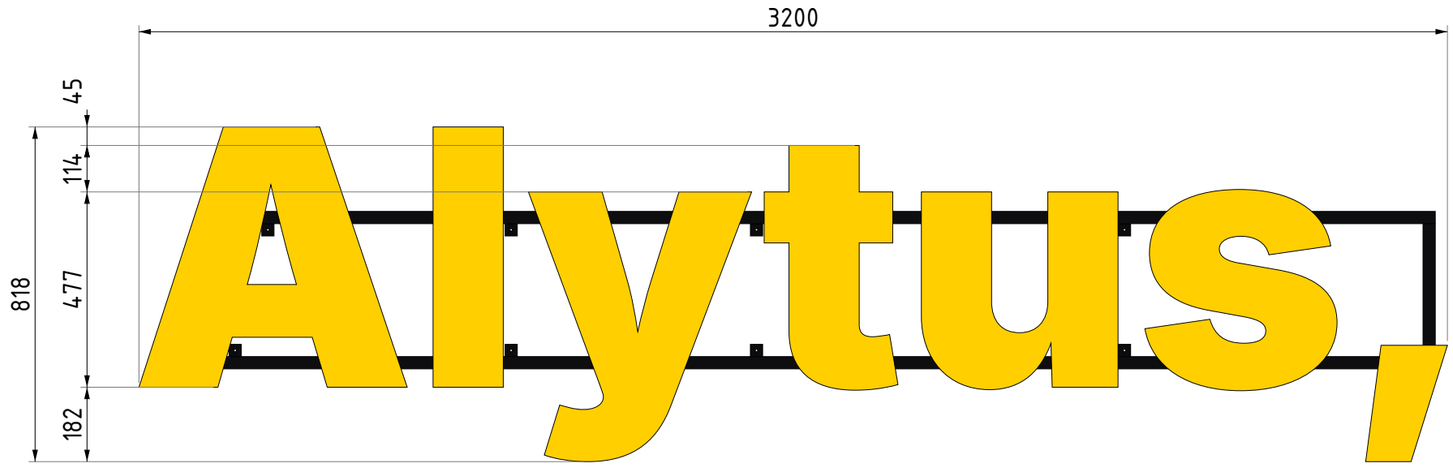

FRONT VIEW

SCALE 1:15

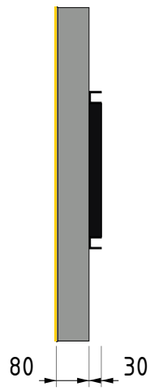

SIDE VIEW (RIGHT)

SCALE 1:15

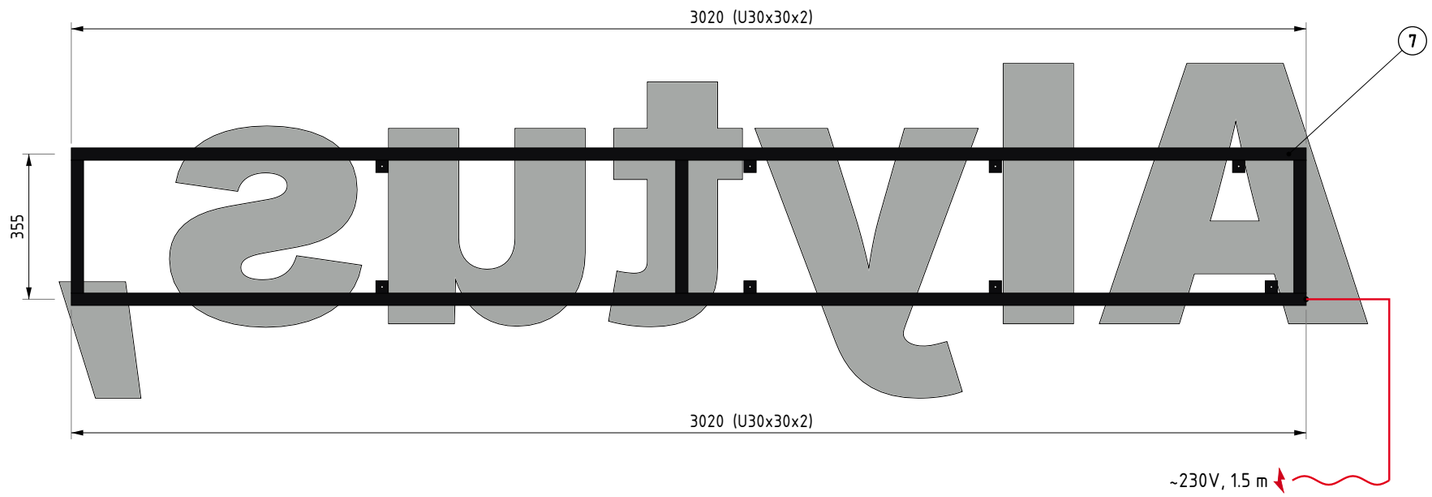

REAR VIEW (MIRRORED)

SCALE 1:15 | true view from the back

3D VIEW

ILLUSTRATIVE – NOT TO SCALE

PROFILE P6 ON RAILS – TYPICAL SECTION



BILL OF MATERIALS (per 1 pcs.)

POS	PART	MATERIAL	FINISH	QTY (PERIMETER / AREA)
1	Letter face	Acrylic 8 mm white	white	15.48 m / 1.04 m^2
	Front foil ORACAL 8500 021 Yellow	translucent foil	021 Yellow	1190 mm x 1.71 m = 2.04 m^2 (nesting)
2	Letter return	Alu 1 mm	RAL 9006	15.48 m / 1.24 m^2
3	Letter back	Alu 1.5 mm	RAL 9006	15.48 m / 1.04 m^2
4	LED modules			
5	Rail U 30x30x2 with ears	Aluminium	RAL 9005 matt	7.01 m
6	Mounting ear 30x30x2, ⌀6 hole	Aluminium	RAL 9005 matt	8 pcs. (0 extended)
7	El. output ~230V, rail end left bottom	cable 1.5 m	-	1 pcs.
8	PSU inside sign			
9	Wall fixing		-	

MAIN DATA

Quantity	
Overall size	3200 x 818
Profile	P6 on rails
Letter depth	80
Face	P6_8mm + ORACAL 8500 021
Returns	RAL 9006
Font	Arial Black
Rails	U 30x30x2 + ears, RAL 9005
Illumination	LED
Power	~230V, 1.5 m, left bottom
Wind qp	0.56 kN/m^2
Weight (calc.)	≈ 21 kg / pcs, excl. PSU

REVISIONS

REV	DESCRIPTION	DATE	BY
A	First issue	2026-10-13	

CLIENT

TEST

TITLE

Alytus, – illuminated letters P6 on rails

ORDER NO.	FILE / DRAWING NO.			
ALT0000_00.00_RS	TEST Alytus P6			
SCALE (DIM. mm)	FORMAT	SHEET	REV.	PROJECTION
1:15 / 1:15	A3	1 / 1	A	
DRAWN	CHECKED	DATE		
		2026-10-13		