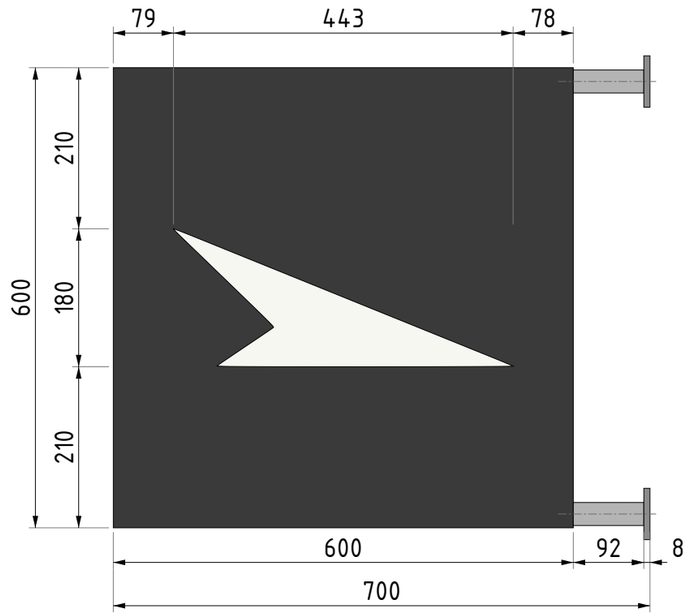

FRONT VIEW – SIDE A

1:8

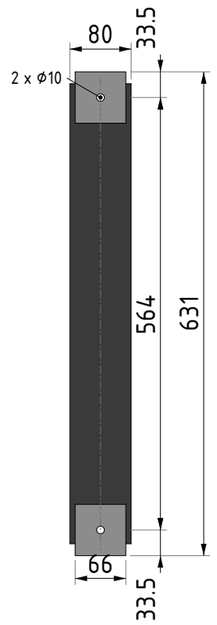

VIEW FROM WALL

1:8

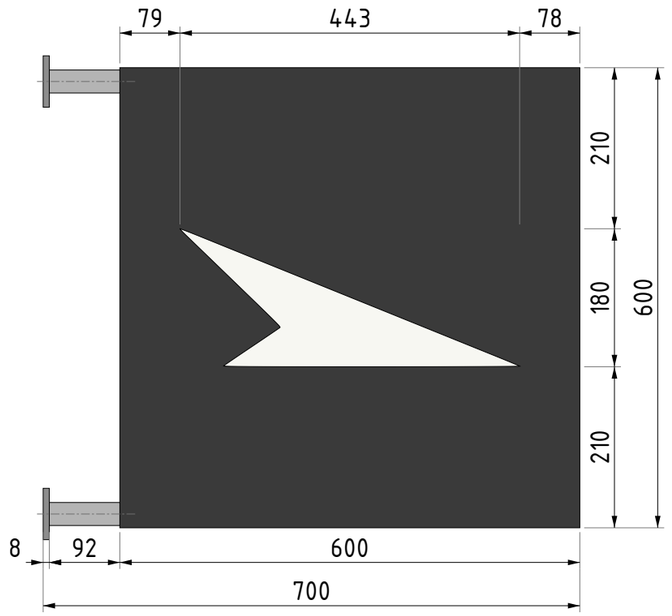

FRONT VIEW – SIDE B

1:8

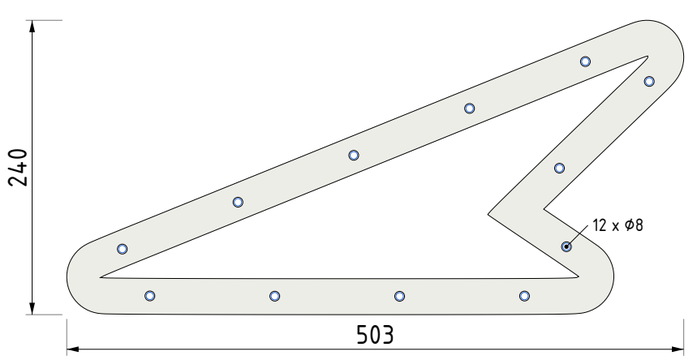

BASE 6 – SIDE A FROM INSIDE

1:5 | contour + 30, ⌀8 at 15 / ~100, Alu: D6 blue marks = studs

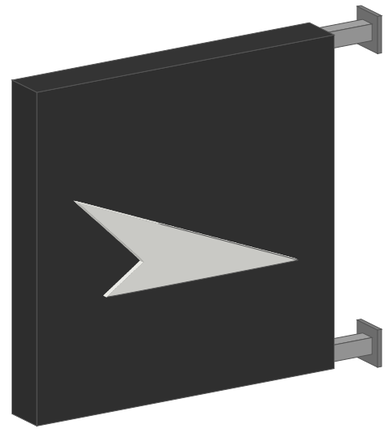

3D – SIDE A

ILLUSTRATIVE

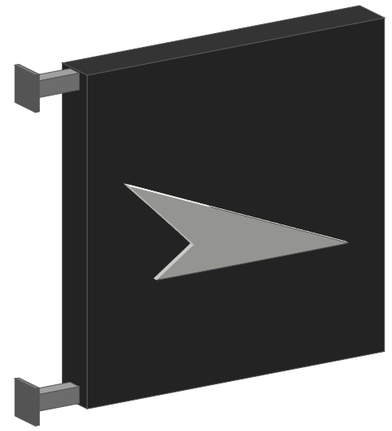

3D – SIDE B

ILLUSTRATIVE

P10_LIGHTBOX – SECTION AT CUT-OUT (SIDE A)



insert 10 GLUED to base; cut = contour + 0.7
side B = mirror; frame + DUOLITE at box edge

PARTS LIST (per 1 pcs.)

POS	PART	MATERIAL	FINISH	QTY (PERIMETER / AREA)
1	Frame + legs □30x30x2	Alu, welded		2 x 689 + 2 x 534 mm
1A	Mounting plate 66x67x8, ⌀10	Alu, welded to leg		2 pcs.
2	Front (A) folded 600x600x40, cut-out	Alu 2 mm		1 pc.
3	Back (B) folded 600x600x40, cut-out	Alu 2 mm		1 pc.
4	Insert A 10 mm, glued to base	Plexi opal white	–	1 pc. 0.027 m²
5	Insert B 10 mm, glued to base	Plexi opal white	–	1 pc. 0.027 m²
6	Base A 3 mm, 12 x ⌀8	Plexi opal white	–	1 pc. 0.064 m²
7	Base B 3 mm, 12 x ⌀8	Plexi opal white	–	1 pc. 0.064 m²
8	LED Kaisen DUOLITE DS15 + PSU	KPS-V12-36W67-RP	6500 K	14 pcs. (20.2 W)
9	Studs (welded to Alu) + nuts		–	24 pcs.
10	Screw, D3.2 in flanges	A2	–	12 pcs.

MAIN DATA

Product	P10 lightbox, 2-sided
Size	600 x 600 x 80 (+ 2 x 8)
From wall	100 mm (legs 92 + plate 8)
Body	Alu 2 folded A + B
Glass	3+10 mm, cut-out + 0.7
Frame	□30x30x2
Plates	separate, 2 x ⌀10
LED / PSU	14 x DUOLITE DS15, KPS-V12-36W67-RP
Qty	
Weight (calc.)	≈ 7.4 kg / pcs, excl. PSU

REVISIONS

REV	DESCRIPTION	DATE	BY
A	First issue	2026-10-13	

CLIENT

TEST

TITLE

P10_lightbox 600x600x80 – push-through (etalon)

ORDER NO.	FILE / DRAWING NO.			
ALT0000_00.00_RS	TEST P10_lightbox			
SCALE (DIM. mm)	FORMAT	SHEET	REV.	PROJECTION
1:8 / 1:2	A3	1 / 1	A	
DRAWN	CHECKED	DATE		
		2026-10-13		